



**杉数科技**  
Cardinal Operations

# Cardinal Optimizer (COPT) User Guide *Ver 6.0.3*

Cardinal Operations

D. Ge, Q. Huangfu, Z. Wang, J. Wu and Y. Ye

Dec 09, 2022



# Contents

<b>1</b>	<b>Introduction to Cardinal Optimizer</b>	<b>1</b>
1.1	Overview . . . . .	1
1.2	Licenses . . . . .	3
1.3	How to Cite . . . . .	3
1.4	Contact Information . . . . .	4
<b>2</b>	<b>Installation Guide</b>	<b>5</b>
2.1	Registration . . . . .	5
2.2	Software Installation . . . . .	6
2.2.1	Windows . . . . .	6
2.2.2	Linux . . . . .	8
2.2.3	MacOS . . . . .	9
2.3	Setting Up License . . . . .	10
2.3.1	Obtaining License . . . . .	10
2.3.2	Verifying License . . . . .	11
2.3.3	Installing License . . . . .	11
2.3.4	Others . . . . .	12
<b>3</b>	<b>COPT Command-Line</b>	<b>13</b>
3.1	Overview . . . . .	13
3.2	Edit mode . . . . .	13
3.3	Script mode . . . . .	14
3.4	Shell commands . . . . .	15
3.4.1	General shell commands . . . . .	15
3.4.2	COPT shell commands . . . . .	16
3.5	Example Usage . . . . .	18
<b>4</b>	<b>COPT Floating Licensing service</b>	<b>21</b>
4.1	Server Setup . . . . .	21
4.1.1	Installation . . . . .	21
4.1.2	Floating License . . . . .	22
4.1.3	Configuration . . . . .	22
4.1.4	Example Usage . . . . .	23
4.2	Client Setup . . . . .	24
4.2.1	Configuration . . . . .	24
4.2.2	Example Usage . . . . .	25
4.3	Floating Token Server Managing Tool . . . . .	26
4.3.1	Tool Usage . . . . .	26
4.3.2	Example Usage . . . . .	27
4.4	Running as service . . . . .	28
4.4.1	Linux . . . . .	29
4.4.2	MacOS . . . . .	30
<b>5</b>	<b>COPT Compute Cluster Service</b>	<b>33</b>

5.1	Server Setup . . . . .	33
5.1.1	Installation . . . . .	33
5.1.2	Cluster License . . . . .	34
5.1.3	Configuration . . . . .	35
5.1.4	Example Usage . . . . .	37
5.2	Client Setup . . . . .	37
5.2.1	Configuration . . . . .	37
5.2.2	Example Usage . . . . .	38
5.3	COPT Cluster Managing Tool . . . . .	39
5.3.1	Tool Usage . . . . .	39
5.3.2	Example Usage . . . . .	41
5.4	Running as service . . . . .	42
5.4.1	Linux . . . . .	43
5.4.2	MacOS . . . . .	44
<b>6</b>	<b>COPT Quick Start</b>	<b>47</b>
6.1	C Interface . . . . .	47
6.1.1	Example details . . . . .	47
6.1.1.1	Creating the environment . . . . .	50
6.1.1.2	Creating the problem . . . . .	50
6.1.1.3	Adding variables . . . . .	50
6.1.1.4	Adding constraints . . . . .	51
6.1.1.5	Setting parameters and attributes . . . . .	51
6.1.1.6	Solve the problem . . . . .	52
6.1.1.7	Analyze the solution . . . . .	52
6.1.1.8	Write problem and solution . . . . .	53
6.1.1.9	Error handling . . . . .	53
6.1.1.10	Delete environment and problem . . . . .	53
6.1.2	Build and run . . . . .	53
6.1.2.1	Windows . . . . .	53
6.1.2.2	Linux and MacOS . . . . .	54
6.2	C++ Interface . . . . .	54
6.2.1	Example details . . . . .	54
6.2.1.1	Creating environment and model . . . . .	56
6.2.1.2	Adding variables . . . . .	56
6.2.1.3	Adding constraints . . . . .	57
6.2.1.4	Setting parameters and attributes . . . . .	57
6.2.1.5	Solving problem . . . . .	57
6.2.1.6	Outputting solution . . . . .	57
6.2.1.7	Error handling . . . . .	58
6.2.2	Build and Run . . . . .	58
6.2.2.1	Windows Visual Studio project . . . . .	58
6.2.2.2	Makefile project . . . . .	59
6.3	C# Interface . . . . .	59
6.3.1	Example details . . . . .	59
6.3.1.1	Creating environment and model . . . . .	61
6.3.1.2	Adding variables . . . . .	61
6.3.1.3	Adding constraints . . . . .	62
6.3.1.4	Setting parameters and attributes . . . . .	62
6.3.1.5	Solving problem . . . . .	62
6.3.1.6	Outputting solution . . . . .	62
6.3.1.7	Error handling . . . . .	63
6.3.2	Build and Run . . . . .	63
6.3.2.1	Dotnet core 2.0 project . . . . .	63
6.4	Java Interface . . . . .	64
6.4.1	Example details . . . . .	64
6.4.1.1	Import COPT class . . . . .	66
6.4.1.2	Creating environment and model . . . . .	66

	6.4.1.3	Adding variables . . . . .	66
	6.4.1.4	Adding constraints . . . . .	66
	6.4.1.5	Setting parameters and attributes . . . . .	67
	6.4.1.6	Solving problem . . . . .	67
	6.4.1.7	Outputting solution . . . . .	67
	6.4.1.8	Error handling . . . . .	68
	6.4.2	Build and Run . . . . .	68
	6.4.2.1	Java example detail . . . . .	68
6.5		Python Interface . . . . .	68
	6.5.1	Installation guide . . . . .	68
	6.5.1.1	Windows . . . . .	69
	6.5.1.2	Linux . . . . .	69
	6.5.1.3	MacOS . . . . .	70
	6.5.2	Example details . . . . .	71
	6.5.2.1	Import Python interface . . . . .	72
	6.5.2.2	Create environment . . . . .	72
	6.5.2.3	Create model . . . . .	72
	6.5.2.4	Add variables . . . . .	73
	6.5.2.5	Add constraints . . . . .	73
	6.5.2.6	Set objective function . . . . .	73
	6.5.2.7	Set parameters . . . . .	73
	6.5.2.8	Solve model . . . . .	73
	6.5.2.9	Analyze solution . . . . .	73
	6.5.2.10	Write files . . . . .	74
	6.5.3	Best Practice . . . . .	74
	6.5.3.1	Upgrade to newer version . . . . .	74
	6.5.3.2	Multi-Thread Programming . . . . .	74
	6.5.3.3	Dictionary order guaranteed after Python v3.7 . . . . .	74
	6.5.3.4	Use quicksum and psdquicksum when possible . . . . .	75
6.6		AMPL Interface . . . . .	75
	6.6.1	Installation Guide . . . . .	75
	6.6.1.1	Windows . . . . .	75
	6.6.1.2	Linux . . . . .	76
	6.6.1.3	MacOS . . . . .	76
	6.6.2	Solver Options and Exit Codes . . . . .	76
	6.6.3	Example Usage . . . . .	78
6.7		Pyomo Interface . . . . .	81
	6.7.1	Installation Guide . . . . .	81
	6.7.1.1	Using conda . . . . .	81
	6.7.1.2	Using pip . . . . .	81
	6.7.2	Example Usage . . . . .	81
	6.7.2.1	Abstract Model . . . . .	81
	6.7.2.2	Concrete Model . . . . .	84
6.8		PuLP Interface . . . . .	86
	6.8.1	Installation guide . . . . .	87
	6.8.1.1	Install via conda . . . . .	87
	6.8.1.2	Install via pip . . . . .	87
	6.8.2	Setup PuLP interface . . . . .	87
	6.8.3	Introduction of features . . . . .	87
	6.8.3.1	Command line . . . . .	87
	6.8.3.2	Dynamic library . . . . .	88
6.9		CVXPY Interface . . . . .	89
	6.9.1	Installation guide . . . . .	89
	6.9.1.1	Install via conda . . . . .	89
	6.9.1.2	Install via pip . . . . .	89
	6.9.2	Setup CVXPY interface . . . . .	89
	6.9.3	Introduction of features . . . . .	90

<b>7</b>	<b>General Constants</b>	<b>91</b>
7.1	Version information . . . . .	91
7.2	Optimization directions . . . . .	91
7.3	Infinity and Undefined Value . . . . .	92
7.4	Constraint senses . . . . .	92
7.5	Variable types . . . . .	93
7.6	SOS-constraint types . . . . .	93
7.7	Indicator constraint . . . . .	93
7.8	Second-Order-Cone constraint . . . . .	93
7.9	Quadratic objective function . . . . .	94
7.10	Quadratic constraint . . . . .	94
7.11	Basis status . . . . .	94
7.12	Solution status . . . . .	94
7.13	Client configuration . . . . .	95
<b>8</b>	<b>Attributes</b>	<b>97</b>
8.1	Problem related . . . . .	97
8.2	Solution related . . . . .	99
8.3	Methods of accessing attributes . . . . .	102
<b>9</b>	<b>Information</b>	<b>103</b>
9.1	Problem information . . . . .	103
9.2	Solution information . . . . .	104
9.3	Dual Farkas and primal ray . . . . .	104
9.4	Feasibility relaxation information . . . . .	105
9.5	Methods of accessing information . . . . .	105
<b>10</b>	<b>Parameters</b>	<b>107</b>
10.1	Limits and tolerances . . . . .	107
10.2	Presolving and scaling . . . . .	109
10.3	Linear programming related . . . . .	110
10.4	Semidefinite programming related . . . . .	112
10.5	Integer programming related . . . . .	112
10.6	Parallel computing related . . . . .	115
10.7	IIS computation related . . . . .	116
10.8	Feasibility relaxation related . . . . .	117
10.9	Parameter Tuning related . . . . .	117
10.10	Other parameters . . . . .	119
10.11	Methods of accessing and setting parameters . . . . .	119
<b>11</b>	<b>MIP Starts</b>	<b>121</b>
11.1	Utilities of MIP Starts . . . . .	121
11.1.1	Set and Load MIP Starts . . . . .	121
11.1.2	Read and Write MIP Starts . . . . .	122
11.2	Related Parameters . . . . .	122
11.3	Log of MIP starts . . . . .	123
11.3.1	MIP starts are accepted . . . . .	123
11.3.2	MIP starts are rejected . . . . .	123
<b>12</b>	<b>MIP Solution Pool</b>	<b>125</b>
<b>13</b>	<b>COPT Tuner</b>	<b>127</b>
13.1	Introduction . . . . .	127
13.2	Related parameters . . . . .	127
13.3	Provided capabilities . . . . .	128
13.3.1	Tuning method . . . . .	128
13.3.2	Tuning mode . . . . .	128
13.3.3	Tuning permutations . . . . .	128
13.3.4	Tuning measure . . . . .	129

13.3.5	Tuning targets . . . . .	129
13.3.6	Tuning output . . . . .	129
13.3.7	TuneTimeLimit . . . . .	129
13.3.8	User defined parts . . . . .	129
13.3.9	Load or writing tuning parameter . . . . .	130
13.4	Example . . . . .	130
<b>14</b>	<b>FAQs</b>	<b>131</b>
14.1	Installation and Licensing Configuration Related . . . . .	131
14.1.1	MacOS System . . . . .	132
14.1.2	Windows System . . . . .	132
14.2	Modeling and Solving Functions Related . . . . .	133
<b>15</b>	<b>C API Reference</b>	<b>135</b>
15.1	Constants . . . . .	135
15.1.1	Optimization directions . . . . .	135
15.1.2	Infinity . . . . .	135
15.1.3	Undefined Value . . . . .	136
15.1.4	Constraint senses . . . . .	136
15.1.5	Variable types . . . . .	136
15.1.6	SOS-constraint types . . . . .	137
15.1.7	Indicator constraint . . . . .	137
15.1.8	Second-Order-Cone constraint . . . . .	137
15.1.9	Quadratic objective function . . . . .	137
15.1.10	Quadratic constraint . . . . .	138
15.1.11	Basis status . . . . .	138
15.1.12	LP solution status . . . . .	138
15.1.13	MIP solution status . . . . .	139
15.1.14	API function return code . . . . .	140
15.1.15	Client configuration . . . . .	140
15.1.16	Other constants . . . . .	141
15.2	Attributes . . . . .	141
15.2.1	Problem information . . . . .	141
15.2.2	Solution information . . . . .	142
15.3	Information . . . . .	144
15.3.1	Problem information . . . . .	144
15.3.2	Solution information . . . . .	145
15.3.3	Dual Farkas and primal ray . . . . .	145
15.3.4	Feasibility relaxation information . . . . .	146
15.4	Parameters . . . . .	146
15.4.1	Limits and tolerances . . . . .	146
15.4.2	Presolving and scaling . . . . .	147
15.4.3	Linear programming related . . . . .	148
15.4.4	Semidefinite programming related . . . . .	150
15.4.5	Integer programming related . . . . .	150
15.4.6	Parallel computing related . . . . .	153
15.4.7	IIS computation related . . . . .	154
15.4.8	Feasibility relaxation related . . . . .	154
15.4.9	Tuner related . . . . .	155
15.4.10	Other parameters . . . . .	156
15.5	API Functions . . . . .	157
15.5.1	Creating the environment and problem . . . . .	157
15.5.1.1	COPT_CreateEnvConfig . . . . .	157
15.5.1.2	COPT_DeleteEnvConfig . . . . .	157
15.5.1.3	COPT_SetEnvConfig . . . . .	157
15.5.1.4	COPT_CreateEnv . . . . .	158
15.5.1.5	COPT_CreateEnvWithPath . . . . .	158
15.5.1.6	COPT_CreateEnvWithConfig . . . . .	158

15.5.1.7	COPT_DeleteEnv . . . . .	159
15.5.1.8	COPT_GetLicenseMsg . . . . .	159
15.5.1.9	COPT_CreateProb . . . . .	159
15.5.1.10	COPT_CreateCopy . . . . .	160
15.5.1.11	COPT_DeleteProb . . . . .	160
15.5.2	Building and modifying a problem . . . . .	160
15.5.2.1	COPT_LoadProb . . . . .	160
15.5.2.2	COPT_AddCol . . . . .	162
15.5.2.3	COPT_AddPSDCol . . . . .	163
15.5.2.4	COPT_AddRow . . . . .	163
15.5.2.5	COPT_AddCols . . . . .	164
15.5.2.6	COPT_AddPSDCols . . . . .	165
15.5.2.7	COPT_AddRows . . . . .	165
15.5.2.8	COPT_AddSOSs . . . . .	166
15.5.2.9	COPT_AddCones . . . . .	166
15.5.2.10	COPT_AddQConstr . . . . .	167
15.5.2.11	COPT_AddPSDConstr . . . . .	168
15.5.2.12	COPT_AddIndicator . . . . .	169
15.5.2.13	COPT_AddSymMat . . . . .	169
15.5.2.14	COPT_DelCols . . . . .	170
15.5.2.15	COPT_DelPSDCols . . . . .	170
15.5.2.16	COPT_DelRows . . . . .	171
15.5.2.17	COPT_DelSOSs . . . . .	171
15.5.2.18	COPT_DelCones . . . . .	171
15.5.2.19	COPT_DelQConstrs . . . . .	172
15.5.2.20	COPT_DelPSDConstrs . . . . .	172
15.5.2.21	COPT_DelIndicators . . . . .	172
15.5.2.22	COPT_DelQuadObj . . . . .	173
15.5.2.23	COPT_DelPSDObj . . . . .	173
15.5.2.24	COPT_SetElem . . . . .	173
15.5.2.25	COPT_SetPSDElem . . . . .	174
15.5.2.26	COPT_SetObjSense . . . . .	174
15.5.2.27	COPT_SetObjConst . . . . .	174
15.5.2.28	COPT_SetColObj/Type/Lower/Upper/Names . . . . .	175
15.5.2.29	COPT_SetPSDColNames . . . . .	176
15.5.2.30	COPT_SetRowLower/Upper/Names . . . . .	176
15.5.2.31	COPT_SetQConstrSense/Rhs/Names . . . . .	177
15.5.2.32	COPT_SetPSDConstrLower/Upper/Names . . . . .	177
15.5.2.33	COPT_ReplaceColObj . . . . .	178
15.5.2.34	COPT_ReplacePSDObj . . . . .	179
15.5.2.35	COPT_SetQuadObj . . . . .	179
15.5.2.36	COPT_SetPSDObj . . . . .	180
15.5.3	Reading and writing the problem . . . . .	180
15.5.3.1	COPT_ReadMps . . . . .	180
15.5.3.2	COPT_ReadLp . . . . .	180
15.5.3.3	COPT_ReadSDPA . . . . .	181
15.5.3.4	COPT_ReadCbf . . . . .	181
15.5.3.5	COPT_ReadBin . . . . .	181
15.5.3.6	COPT_ReadBlob . . . . .	182
15.5.3.7	COPT_WriteMps . . . . .	182
15.5.3.8	COPT_WriteMpsStr . . . . .	182
15.5.3.9	COPT_WriteLp . . . . .	183
15.5.3.10	COPT_WriteCbf . . . . .	183
15.5.3.11	COPT_WriteBin . . . . .	183
15.5.3.12	COPT_WriteBlob . . . . .	184
15.5.4	Solving the problem and accessing solutions . . . . .	184
15.5.4.1	COPT_SolveLp . . . . .	184
15.5.4.2	COPT_Solve . . . . .	184



15.5.4.3	COPT_GetSolution	185
15.5.4.4	COPT_GetPoolObjVal	185
15.5.4.5	COPT_GetPoolSolution	185
15.5.4.6	COPT_GetLpSolution	186
15.5.4.7	COPT_SetLpSolution	186
15.5.4.8	COPT_GetBasis	187
15.5.4.9	COPT_SetBasis	187
15.5.4.10	COPT_SetSlackBasis	187
15.5.4.11	COPT_Reset	188
15.5.4.12	COPT_ReadSol	188
15.5.4.13	COPT_WriteSol	188
15.5.4.14	COPT_WritePoolSol	189
15.5.4.15	COPT_WriteBasis	189
15.5.4.16	COPT_ReadBasis	189
15.5.5	Accessing information of problem	190
15.5.5.1	COPT_GetCols	190
15.5.5.2	COPT_GetPSDCols	190
15.5.5.3	COPT_GetRows	191
15.5.5.4	COPT_GetElem	192
15.5.5.5	COPT_GetPSDElem	192
15.5.5.6	COPT_GetSymMat	192
15.5.5.7	COPT_GetQuadObj	193
15.5.5.8	COPT_GetPSDObj	194
15.5.5.9	COPT_GetSOSs	194
15.5.5.10	COPT_GetCones	195
15.5.5.11	COPT_GetQConstr	195
15.5.5.12	COPT_GetPSDConstr	197
15.5.5.13	COPT_GetIndicator	198
15.5.5.14	COPT_GetColIdx	199
15.5.5.15	COPT_GetPSDColIdx	199
15.5.5.16	COPT_GetRowIdx	199
15.5.5.17	COPT_GetQConstrIdx	200
15.5.5.18	COPT_GetPSDConstrIdx	200
15.5.5.19	COPT_GetColInfo	200
15.5.5.20	COPT_GetPSDColInfo	201
15.5.5.21	COPT_GetRowInfo	201
15.5.5.22	COPT_GetQConstrInfo	202
15.5.5.23	COPT_GetPSDConstrInfo	202
15.5.5.24	COPT_GetColType	203
15.5.5.25	COPT_GetColBasis	203
15.5.5.26	COPT_GetRowBasis	204
15.5.5.27	COPT_GetQConstrSense	204
15.5.5.28	COPT_GetQConstrRhs	205
15.5.5.29	COPT_GetColName	205
15.5.5.30	COPT_GetPSDColName	206
15.5.5.31	COPT_GetRowName	206
15.5.5.32	COPT_GetQConstrName	207
15.5.5.33	COPT_GetPSDConstrName	207
15.5.6	Accessing parameters and attributes	208
15.5.6.1	COPT_SetIntParam	208
15.5.6.2	COPT_GetIntParam, COPT_GetIntParamDef/Min/Max	208
15.5.6.3	COPT_SetDblParam	209
15.5.6.4	COPT_GetDblParam, COPT_GetDblParamDef/Min/Max	209
15.5.6.5	COPT_ResetParam	210
15.5.6.6	COPT_GetIntAttr	210
15.5.6.7	COPT_GetDblAttr	210
15.5.6.8	COPT_WriteParam	211
15.5.6.9	COPT_WriteParamStr	211

15.5.6.10	COPT_ReadParam	211
15.5.6.11	COPT_ReadParamStr	212
15.5.7	Logging utilities	212
15.5.7.1	COPT_SetLogFile	212
15.5.7.2	COPT_SetLogCallback	212
15.5.8	MIP start utilities	213
15.5.8.1	COPT_AddMipStart	213
15.5.8.2	COPT_ReadMst	213
15.5.8.3	COPT_WriteMst	213
15.5.9	IIS utilities	214
15.5.9.1	COPT_ComputeIIS	214
15.5.9.2	COPT_GetColLowerIIS	214
15.5.9.3	COPT_GetColUpperIIS	214
15.5.9.4	COPT_GetRowLowerIIS	215
15.5.9.5	COPT_GetRowUpperIIS	215
15.5.9.6	COPT_GetSOSIIS	216
15.5.9.7	COPT_GetIndicatorIIS	216
15.5.10	Feasibility relaxation utilities	217
15.5.10.1	COPT_FeasRelax	217
15.5.10.2	COPT_WriteRelax	217
15.5.11	Parameter tuning utilities	218
15.5.11.1	COPT_Tune	218
15.5.11.2	COPT_LoadTuneParam	218
15.5.11.3	COPT_ReadTune	218
15.5.11.4	COPT_WriteTuneParam	219
15.5.12	Other API functions	219
15.5.12.1	COPT_GetBanner	219
15.5.12.2	COPT_GetRetcodeMsg	219
15.5.12.3	COPT_Interrupt	220
<b>16</b>	<b>C++ API Reference</b>	<b>221</b>
16.1	Constants	221
16.2	Attributes	221
16.3	Parameters	221
16.4	C++ Modeling Classes	222
16.4.1	Envr	222
16.4.1.1	Envr::Envr()	222
16.4.1.2	Envr::Envr()	222
16.4.1.3	Envr::Envr()	222
16.4.1.4	Envr::Close()	222
16.4.1.5	Envr::CreateModel()	223
16.4.2	EnvrConfig	223
16.4.2.1	EnvrConfig::EnvrConfig()	223
16.4.2.2	EnvrConfig::Set()	223
16.4.3	Model	223
16.4.3.1	Model::AddCone()	223
16.4.3.2	Model::AddCone()	224
16.4.3.3	Model::AddCone()	224
16.4.3.4	Model::AddConstr()	224
16.4.3.5	Model::AddConstr()	225
16.4.3.6	Model::AddConstr()	225
16.4.3.7	Model::AddConstr()	226
16.4.3.8	Model::AddConstrs()	226
16.4.3.9	Model::AddConstrs()	226
16.4.3.10	Model::AddConstrs()	227
16.4.3.11	Model::AddConstrs()	227
16.4.3.12	Model::AddConstrs()	228
16.4.3.13	Model::AddDenseMat()	228

16.4.3.14	Model::AddDenseMat()	228
16.4.3.15	Model::AddDiagMat()	229
16.4.3.16	Model::AddDiagMat()	229
16.4.3.17	Model::AddDiagMat()	229
16.4.3.18	Model::AddDiagMat()	230
16.4.3.19	Model::AddEyeMat()	230
16.4.3.20	Model::AddGenConstrIndicator()	230
16.4.3.21	Model::AddGenConstrIndicator()	231
16.4.3.22	Model::AddGenConstrIndicator()	231
16.4.3.23	Model::AddOnesMat()	232
16.4.3.24	Model::AddPsdConstr()	232
16.4.3.25	Model::AddPsdConstr()	232
16.4.3.26	Model::AddPsdConstr()	233
16.4.3.27	Model::AddPsdConstr()	233
16.4.3.28	Model::AddPsdVar()	233
16.4.3.29	Model::AddPsdVars()	234
16.4.3.30	Model::AddPsdVars()	234
16.4.3.31	Model::AddQConstr()	234
16.4.3.32	Model::AddQConstr()	235
16.4.3.33	Model::AddQConstr()	235
16.4.3.34	Model::AddSos()	236
16.4.3.35	Model::AddSos()	236
16.4.3.36	Model::AddSparseMat()	236
16.4.3.37	Model::AddSymMat()	237
16.4.3.38	Model::AddVar()	237
16.4.3.39	Model::AddVar()	237
16.4.3.40	Model::AddVars()	238
16.4.3.41	Model::AddVars()	238
16.4.3.42	Model::AddVars()	239
16.4.3.43	Model::AddVars()	239
16.4.3.44	Model::AddVars()	240
16.4.3.45	Model::AddVars()	240
16.4.3.46	Model::AddVars()	241
16.4.3.47	Model::Clear()	242
16.4.3.48	Model::Clone()	242
16.4.3.49	Model::ComputeIIS()	242
16.4.3.50	Model::DelPsdObj()	242
16.4.3.51	Model::DelQuadObj()	242
16.4.3.52	Model::FeasRelax()	242
16.4.3.53	Model::FeasRelax()	243
16.4.3.54	Model::Get()	243
16.4.3.55	Model::Get()	243
16.4.3.56	Model::Get()	244
16.4.3.57	Model::Get()	244
16.4.3.58	Model::GetCoeff()	245
16.4.3.59	Model::GetCol()	245
16.4.3.60	Model::GetColBasis()	245
16.4.3.61	Model::GetCone()	245
16.4.3.62	Model::GetConeBuilders()	246
16.4.3.63	Model::GetConeBuilders()	246
16.4.3.64	Model::GetCones()	246
16.4.3.65	Model::GetConstr()	246
16.4.3.66	Model::GetConstrBuilder()	247
16.4.3.67	Model::GetConstrBuilders()	247
16.4.3.68	Model::GetConstrByName()	247
16.4.3.69	Model::GetConstrLowerIIS()	247
16.4.3.70	Model::GetConstrs()	248
16.4.3.71	Model::GetConstrUpperIIS()	248

16.4.3.72	Model::GetDblAttr()	248
16.4.3.73	Model::GetDblParam()	248
16.4.3.74	Model::GetGenConstrIndicator()	249
16.4.3.75	Model::GetIndicatorIIS()	249
16.4.3.76	Model::GetIntAttr()	249
16.4.3.77	Model::GetIntParam()	249
16.4.3.78	Model::GetLpSolution()	250
16.4.3.79	Model::GetObjective()	250
16.4.3.80	Model::GetParamAttrType()	250
16.4.3.81	Model::GetParamInfo()	250
16.4.3.82	Model::GetParamInfo()	251
16.4.3.83	Model::GetPoolObjVal()	251
16.4.3.84	Model::GetPoolSolution()	252
16.4.3.85	Model::GetPsdCoeff()	252
16.4.3.86	Model::GetPsdConstr()	252
16.4.3.87	Model::GetPsdConstrBuilder()	253
16.4.3.88	Model::GetPsdConstrBuilders()	253
16.4.3.89	Model::GetPsdConstrByName()	253
16.4.3.90	Model::GetPsdConstrs()	253
16.4.3.91	Model::GetPsdObjective()	254
16.4.3.92	Model::GetPsdRow()	254
16.4.3.93	Model::GetPsdRow()	254
16.4.3.94	Model::GetPsdVar()	254
16.4.3.95	Model::GetPsdVarByName()	255
16.4.3.96	Model::GetPsdVars()	255
16.4.3.97	Model::GetQConstr()	255
16.4.3.98	Model::GetQConstrBuilder()	255
16.4.3.99	Model::GetQConstrBuilders()	256
16.4.3.100	Model::GetQConstrByName()	256
16.4.3.101	Model::GetQConstrs()	256
16.4.3.102	Model::GetQuadObjective()	256
16.4.3.103	Model::GetQuadRow()	256
16.4.3.104	Model::GetQuadRow()	257
16.4.3.105	Model::GetRow()	257
16.4.3.106	Model::GetRowBasis()	257
16.4.3.107	Model::GetSolution()	258
16.4.3.108	Model::GetSos()	258
16.4.3.109	Model::GetSosBuilders()	258
16.4.3.110	Model::GetSosBuilders()	258
16.4.3.111	Model::GetSOSIIS()	259
16.4.3.112	Model::GetSoss()	259
16.4.3.113	Model::GetSymMat()	259
16.4.3.114	Model::GetVar()	259
16.4.3.115	Model::GetVarByName()	260
16.4.3.116	Model::GetVarLowerIIS()	260
16.4.3.117	Model::GetVars()	260
16.4.3.118	Model::GetVarUpperIIS()	260
16.4.3.119	Model::Interrupt()	261
16.4.3.120	Model::LoadMipStart()	261
16.4.3.121	Model::LoadTuneParam()	261
16.4.3.122	Model::Read()	261
16.4.3.123	Model::ReadBasis()	261
16.4.3.124	Model::ReadBin()	261
16.4.3.125	Model::ReadCbf()	262
16.4.3.126	Model::ReadLp()	262
16.4.3.127	Model::ReadMps()	262
16.4.3.128	Model::ReadMst()	262
16.4.3.129	Model::ReadParam()	262

16.4.3.130	Model::ReadSdpa()	263
16.4.3.131	Model::ReadSol()	263
16.4.3.132	Model::ReadTune()	263
16.4.3.133	Model::Remove()	263
16.4.3.134	Model::Remove()	263
16.4.3.135	Model::Remove()	264
16.4.3.136	Model::Remove()	264
16.4.3.137	Model::Remove()	264
16.4.3.138	Model::Remove()	264
16.4.3.139	Model::Remove()	264
16.4.3.140	Model::Remove()	265
16.4.3.141	Model::Reset()	265
16.4.3.142	Model::ResetAll()	265
16.4.3.143	Model::ResetParam()	265
16.4.3.144	Model::Set()	265
16.4.3.145	Model::Set()	266
16.4.3.146	Model::Set()	266
16.4.3.147	Model::SetBasis()	266
16.4.3.148	Model::SetCoeff()	267
16.4.3.149	Model::SetDbiParam()	267
16.4.3.150	Model::SetIntParam()	267
16.4.3.151	Model::SetLpSolution()	267
16.4.3.152	Model::SetMipStart()	268
16.4.3.153	Model::SetMipStart()	268
16.4.3.154	Model::SetMipStart()	268
16.4.3.155	Model::SetObjConst()	268
16.4.3.156	Model::SetObjective()	269
16.4.3.157	Model::SetObjSense()	269
16.4.3.158	Model::SetPsdCoeff()	269
16.4.3.159	Model::SetPsdObjective()	269
16.4.3.160	Model::SetQuadObjective()	270
16.4.3.161	Model::SetSlackBasis()	270
16.4.3.162	Model::SetSolverLogCallback()	270
16.4.3.163	Model::SetSolverLogFile()	270
16.4.3.164	Model::Solve()	270
16.4.3.165	Model::SolveLp()	271
16.4.3.166	Model::Tune()	271
16.4.3.167	Model::Write()	271
16.4.3.168	Model::WriteBasis()	271
16.4.3.169	Model::WriteBin()	271
16.4.3.170	Model::WriteIIS()	271
16.4.3.171	Model::WriteLp()	272
16.4.3.172	Model::WriteMps()	272
16.4.3.173	Model::WriteMpsStr()	272
16.4.3.174	Model::WriteMst()	272
16.4.3.175	Model::WriteParam()	272
16.4.3.176	Model::WritePoolSol()	273
16.4.3.177	Model::WriteRelax()	273
16.4.3.178	Model::WriteSol()	273
16.4.3.179	Model::WriteTuneParam()	273
16.4.4	Var	273
16.4.4.1	Var::Get()	274
16.4.4.2	Var::GetIdx()	274
16.4.4.3	Var::GetLowerIIS()	274
16.4.4.4	Var::GetName()	274
16.4.4.5	Var::GetType()	274
16.4.4.6	Var::GetUpperIIS()	275
16.4.4.7	Var::Remove()	275

16.4.4.8	Var::Set()	275
16.4.4.9	Var::SetName()	275
16.4.4.10	Var::SetType()	275
16.4.5	VarArray	276
16.4.5.1	VarArray::GetVar()	276
16.4.5.2	VarArray::PushBack()	276
16.4.5.3	VarArray::Reserve()	276
16.4.5.4	VarArray::Size()	276
16.4.6	Expr	277
16.4.6.1	Expr::Expr()	277
16.4.6.2	Expr::Expr()	277
16.4.6.3	Expr::AddConstant()	277
16.4.6.4	Expr::AddExpr()	277
16.4.6.5	Expr::AddTerm()	278
16.4.6.6	Expr::AddTerms()	278
16.4.6.7	Expr::Clone()	278
16.4.6.8	Expr::Evaluate()	278
16.4.6.9	Expr::GetCoeff()	279
16.4.6.10	Expr::GetConstant()	279
16.4.6.11	Expr::GetVar()	279
16.4.6.12	Expr::operator*=()	279
16.4.6.13	Expr::operator*()	280
16.4.6.14	Expr::operator*()	280
16.4.6.15	Expr::operator*()	280
16.4.6.16	Expr::operator+=()	280
16.4.6.17	Expr::operator+()	281
16.4.6.18	Expr::operator-=()	281
16.4.6.19	Expr::operator-()	281
16.4.6.20	Expr::Remove()	281
16.4.6.21	Expr::Remove()	282
16.4.6.22	Expr::Reserve()	282
16.4.6.23	Expr::SetCoeff()	282
16.4.6.24	Expr::SetConstant()	282
16.4.6.25	Expr::Size()	282
16.4.7	Constraint	283
16.4.7.1	Constraint::Get()	283
16.4.7.2	Constraint::GetBasis()	283
16.4.7.3	Constraint::GetIdx()	283
16.4.7.4	Constraint::GetLowerIIS()	283
16.4.7.5	Constraint::GetName()	284
16.4.7.6	Constraint::GetUpperIIS()	284
16.4.7.7	Constraint::Remove()	284
16.4.7.8	Constraint::Set()	284
16.4.7.9	Constraint::SetName()	284
16.4.8	ConstrArray	285
16.4.8.1	ConstrArray::GetConstr()	285
16.4.8.2	ConstrArray::PushBack()	285
16.4.8.3	ConstrArray::Reserve()	285
16.4.8.4	ConstrArray::Size()	285
16.4.9	ConstrBuilder	286
16.4.9.1	ConstrBuilder::GetExpr()	286
16.4.9.2	ConstrBuilder::GetRange()	286
16.4.9.3	ConstrBuilder::GetSense()	286
16.4.9.4	ConstrBuilder::Set()	286
16.4.9.5	ConstrBuilder::SetRange()	287
16.4.10	ConstrBuilderArray	287
16.4.10.1	ConstrBuilderArray::GetBuilder()	287
16.4.10.2	ConstrBuilderArray::PushBack()	287

16.4.10.3	ConstrBuilderArray::Reserve()	287
16.4.10.4	ConstrBuilderArray::Size()	288
16.4.11	Column	288
16.4.11.1	Column::Column()	288
16.4.11.2	Column::AddColumn()	288
16.4.11.3	Column::AddTerm()	288
16.4.11.4	Column::AddTerms()	289
16.4.11.5	Column::Clear()	289
16.4.11.6	Column::Clone()	289
16.4.11.7	Column::GetCoeff()	289
16.4.11.8	Column::GetConstr()	290
16.4.11.9	Column::Remove()	290
16.4.11.10	Column::Remove()	290
16.4.11.11	Column::Reserve()	290
16.4.11.12	Column::Size()	291
16.4.12	ColumnArray	291
16.4.12.1	ColumnArray::Clear()	291
16.4.12.2	ColumnArray::GetColumn()	291
16.4.12.3	ColumnArray::PushBack()	291
16.4.12.4	ColumnArray::Reserve()	292
16.4.12.5	ColumnArray::Size()	292
16.4.13	Sos	292
16.4.13.1	Sos::GetIdx()	292
16.4.13.2	Sos::GetIIS()	292
16.4.13.3	Sos::Remove()	293
16.4.14	SosArray	293
16.4.14.1	SosArray::GetSos()	293
16.4.14.2	SosArray::PushBack()	293
16.4.14.3	SosArray::Size()	293
16.4.15	SosBuilder	294
16.4.15.1	SosBuilder::GetSize()	294
16.4.15.2	SosBuilder::GetType()	294
16.4.15.3	SosBuilder::GetVar()	294
16.4.15.4	SosBuilder::GetVars()	294
16.4.15.5	SosBuilder::GetWeight()	295
16.4.15.6	SosBuilder::GetWeights()	295
16.4.15.7	SosBuilder::Set()	295
16.4.16	SosBuilderArray	295
16.4.16.1	SosBuilderArray::GetBuilder()	296
16.4.16.2	SosBuilderArray::PushBack()	296
16.4.16.3	SosBuilderArray::Size()	296
16.4.17	GenConstr	296
16.4.17.1	GenConstr::GetIdx()	296
16.4.17.2	GenConstr::GetIIS()	297
16.4.17.3	GenConstr::Remove()	297
16.4.18	GenConstrArray	297
16.4.18.1	GenConstrArray::GetGenConstr()	297
16.4.18.2	GenConstrArray::PushBack()	297
16.4.18.3	GenConstrArray::Size()	298
16.4.19	GenConstrBuilder	298
16.4.19.1	GenConstrBuilder::GetBinVal()	298
16.4.19.2	GenConstrBuilder::GetBinVar()	298
16.4.19.3	GenConstrBuilder::GetExpr()	298
16.4.19.4	GenConstrBuilder::GetSense()	299
16.4.19.5	GenConstrBuilder::Set()	299
16.4.20	GenConstrBuilderArray	299
16.4.20.1	GenConstrBuilderArray::GetBuilder()	299
16.4.20.2	GenConstrBuilderArray::PushBack()	300



16.4.20.3	GenConstrBuilderArray::Size()	300
16.4.21	Cone	300
16.4.21.1	Cone::GetIdx()	300
16.4.21.2	Cone::Remove()	300
16.4.22	ConeArray	301
16.4.22.1	ConeArray::GetCone()	301
16.4.22.2	ConeArray::PushBack()	301
16.4.22.3	ConeArray::Size()	301
16.4.23	ConeBuilder	301
16.4.23.1	ConeBuilder::GetSize()	301
16.4.23.2	ConeBuilder::GetType()	302
16.4.23.3	ConeBuilder::GetVar()	302
16.4.23.4	ConeBuilder::GetVars()	302
16.4.23.5	ConeBuilder::Set()	302
16.4.24	ConeBuilderArray	302
16.4.24.1	ConeBuilderArray::GetBuilder()	303
16.4.24.2	ConeBuilderArray::PushBack()	303
16.4.24.3	ConeBuilderArray::Size()	303
16.4.25	QuadExpr	303
16.4.25.1	QuadExpr::QuadExpr()	303
16.4.25.2	QuadExpr::QuadExpr()	304
16.4.25.3	QuadExpr::QuadExpr()	304
16.4.25.4	QuadExpr::QuadExpr()	304
16.4.25.5	QuadExpr::QuadExpr()	304
16.4.25.6	QuadExpr::AddConstant()	304
16.4.25.7	QuadExpr::AddLinExpr()	305
16.4.25.8	QuadExpr::AddQuadExpr()	305
16.4.25.9	QuadExpr::AddTerm()	305
16.4.25.10	QuadExpr::AddTerm()	305
16.4.25.11	QuadExpr::AddTerms()	306
16.4.25.12	QuadExpr::AddTerms()	306
16.4.25.13	QuadExpr::Clone()	306
16.4.25.14	QuadExpr::Evaluate()	307
16.4.25.15	QuadExpr::GetCoeff()	307
16.4.25.16	QuadExpr::GetConstant()	307
16.4.25.17	QuadExpr::GetLinExpr()	307
16.4.25.18	QuadExpr::GetVar1()	307
16.4.25.19	QuadExpr::GetVar2()	308
16.4.25.20	QuadExpr::operator*=()	308
16.4.25.21	QuadExpr::operator*()	308
16.4.25.22	QuadExpr::operator+=()	308
16.4.25.23	QuadExpr::operator+()	309
16.4.25.24	QuadExpr::operator-=()	309
16.4.25.25	QuadExpr::operator-()	309
16.4.25.26	QuadExpr::Remove()	309
16.4.25.27	QuadExpr::Remove()	310
16.4.25.28	QuadExpr::Reserve()	310
16.4.25.29	QuadExpr::SetCoeff()	310
16.4.25.30	QuadExpr::SetConstant()	310
16.4.25.31	QuadExpr::Size()	310
16.4.26	QConstraint	311
16.4.26.1	QConstraint::Get()	311
16.4.26.2	QConstraint::GetIdx()	311
16.4.26.3	QConstraint::GetName()	311
16.4.26.4	QConstraint::GetRhs()	311
16.4.26.5	QConstraint::GetSense()	312
16.4.26.6	QConstraint::Remove()	312
16.4.26.7	QConstraint::Set()	312



16.4.26.8	QConstraint::SetName()	312
16.4.26.9	QConstraint::SetRhs()	312
16.4.26.10	QConstraint::SetSense()	313
16.4.27	QConstrArray	313
16.4.27.1	QConstrArray::GetQConstr()	313
16.4.27.2	QConstrArray::PushBack()	313
16.4.27.3	QConstrArray::Reserve()	313
16.4.27.4	QConstrArray::Size()	314
16.4.28	QConstrBuilder	314
16.4.28.1	QConstrBuilder::GetQuadExpr()	314
16.4.28.2	QConstrBuilder::GetSense()	314
16.4.28.3	QConstrBuilder::Set()	314
16.4.29	QConstrBuilderArray	315
16.4.29.1	QConstrBuilderArray::GetBuilder()	315
16.4.29.2	QConstrBuilderArray::PushBack()	315
16.4.29.3	QConstrBuilderArray::Reserve()	315
16.4.29.4	QConstrBuilderArray::Size()	315
16.4.30	PsdVar	316
16.4.30.1	PsdVar::Get()	316
16.4.30.2	PsdVar::GetDim()	316
16.4.30.3	PsdVar::GetIdx()	316
16.4.30.4	PsdVar::GetLen()	316
16.4.30.5	PsdVar::GetName()	317
16.4.30.6	PsdVar::Remove()	317
16.4.30.7	PsdVar::SetName()	317
16.4.31	PsdVarArray	317
16.4.31.1	PsdVarArray::GetPsdVar()	317
16.4.31.2	PsdVarArray::PushBack()	318
16.4.31.3	PsdVarArray::Reserve()	318
16.4.31.4	PsdVarArray::Size()	318
16.4.32	PsdExpr	318
16.4.32.1	PsdExpr::PsdExpr()	318
16.4.32.2	PsdExpr::PsdExpr()	319
16.4.32.3	PsdExpr::PsdExpr()	319
16.4.32.4	PsdExpr::PsdExpr()	319
16.4.32.5	PsdExpr::PsdExpr()	319
16.4.32.6	PsdExpr::AddConstant()	319
16.4.32.7	PsdExpr::AddLinExpr()	320
16.4.32.8	PsdExpr::AddPsdExpr()	320
16.4.32.9	PsdExpr::AddTerm()	320
16.4.32.10	PsdExpr::AddTerm()	320
16.4.32.11	PsdExpr::AddTerm()	321
16.4.32.12	PsdExpr::AddTerms()	321
16.4.32.13	PsdExpr::AddTerms()	321
16.4.32.14	PsdExpr::Clone()	322
16.4.32.15	PsdExpr::Evaluate()	322
16.4.32.16	PsdExpr::GetCoeff()	322
16.4.32.17	PsdExpr::GetConstant()	322
16.4.32.18	PsdExpr::GetLinExpr()	322
16.4.32.19	PsdExpr::GetPsdVar()	323
16.4.32.20	PsdExpr::operator*=( )	323
16.4.32.21	PsdExpr::operator*( )	323
16.4.32.22	PsdExpr::operator+=( )	323
16.4.32.23	PsdExpr::operator+( )	324
16.4.32.24	PsdExpr::operator-=( )	324
16.4.32.25	PsdExpr::operator-( )	324
16.4.32.26	PsdExpr::Remove()	324
16.4.32.27	PsdExpr::Remove()	325

16.4.32.2	<code>PsdExpr::Remove()</code>	325
16.4.32.2	<code>PsdExpr::Reserve()</code>	325
16.4.32.3	<code>PsdExpr::SetCoeff()</code>	325
16.4.32.3	<code>PsdExpr::SetConstant()</code>	325
16.4.32.3	<code>PsdExpr::Size()</code>	326
16.4.33	<code>PsdConstraint</code>	326
16.4.33.1	<code>PsdConstraint::Get()</code>	326
16.4.33.2	<code>PsdConstraint::GetIdx()</code>	326
16.4.33.3	<code>PsdConstraint::GetName()</code>	326
16.4.33.4	<code>PsdConstraint::Remove()</code>	327
16.4.33.5	<code>PsdConstraint::Set()</code>	327
16.4.33.6	<code>PsdConstraint::SetName()</code>	327
16.4.34	<code>PsdConstrArray</code>	327
16.4.34.1	<code>PsdConstrArray::GetPsdConstr()</code>	327
16.4.34.2	<code>PsdConstrArray::PushBack()</code>	328
16.4.34.3	<code>PsdConstrArray::Reserve()</code>	328
16.4.34.4	<code>PsdConstrArray::Size()</code>	328
16.4.35	<code>PsdConstrBuilder</code>	328
16.4.35.1	<code>PsdConstrBuilder::GetPsdExpr()</code>	328
16.4.35.2	<code>PsdConstrBuilder::GetRange()</code>	329
16.4.35.3	<code>PsdConstrBuilder::GetSense()</code>	329
16.4.35.4	<code>PsdConstrBuilder::Set()</code>	329
16.4.35.5	<code>PsdConstrBuilder::SetRange()</code>	329
16.4.36	<code>PsdConstrBuilderArray</code>	330
16.4.36.1	<code>PsdConstrBuilderArray::GetBuilder()</code>	330
16.4.36.2	<code>PsdConstrBuilderArray::PushBack()</code>	330
16.4.36.3	<code>PsdConstrBuilderArray::Reserve()</code>	330
16.4.36.4	<code>PsdConstrBuilderArray::Size()</code>	330
16.4.37	<code>SymMatrix</code>	331
16.4.37.1	<code>SymMatrix::GetDim()</code>	331
16.4.37.2	<code>SymMatrix::GetIdx()</code>	331
16.4.38	<code>SymMatrixArray</code>	331
16.4.38.1	<code>SymMatrixArray::GetMatrix()</code>	331
16.4.38.2	<code>SymMatrixArray::PushBack()</code>	332
16.4.38.3	<code>SymMatrixArray::Reserve()</code>	332
16.4.38.4	<code>SymMatrixArray::Size()</code>	332
16.4.39	<code>SymMatExpr</code>	332
16.4.39.1	<code>SymMatExpr::SymMatExpr()</code>	332
16.4.39.2	<code>SymMatExpr::SymMatExpr()</code>	332
16.4.39.3	<code>SymMatExpr::AddSymMatExpr()</code>	333
16.4.39.4	<code>SymMatExpr::AddTerm()</code>	333
16.4.39.5	<code>SymMatExpr::AddTerms()</code>	333
16.4.39.6	<code>SymMatExpr::Clone()</code>	334
16.4.39.7	<code>SymMatExpr::GetCoeff()</code>	334
16.4.39.8	<code>SymMatExpr::GetDim()</code>	334
16.4.39.9	<code>SymMatExpr::GetSymMat()</code>	334
16.4.39.10	<code>SymMatExpr::operator*=()</code>	335
16.4.39.11	<code>SymMatExpr::operator*()</code>	335
16.4.39.12	<code>SymMatExpr::operator+=()</code>	335
16.4.39.13	<code>SymMatExpr::operator+()</code>	335
16.4.39.14	<code>SymMatExpr::operator-=()</code>	336
16.4.39.15	<code>SymMatExpr::operator-()</code>	336
16.4.39.16	<code>SymMatExpr::Remove()</code>	336
16.4.39.17	<code>SymMatExpr::Remove()</code>	336
16.4.39.18	<code>SymMatExpr::Reserve()</code>	336
16.4.39.19	<code>SymMatExpr::SetCoeff()</code>	337
16.4.39.20	<code>SymMatExpr::Size()</code>	337
16.4.40	<code>ProbBuffer</code>	337

16.4.40.1	ProbBuffer::ProbBuffer()	337
16.4.40.2	ProbBuffer::GetData()	337
16.4.40.3	ProbBuffer::Resize()	338
16.4.40.4	ProbBuffer::Size()	338
<b>17</b>	<b>C# API Reference</b>	<b>339</b>
17.1	Constants	339
17.1.1	General Constants	339
17.1.2	Attributes	339
17.1.3	Information	339
17.1.4	Parameters	340
17.2	C# Modeling Classes	340
17.2.1	Envr	340
17.2.1.1	Envr.Envr()	340
17.2.1.2	Envr.Envr()	340
17.2.1.3	Envr.Envr()	341
17.2.1.4	Envr.Close()	341
17.2.1.5	Envr.CreateModel()	341
17.2.2	EnvrConfig	341
17.2.2.1	EnvrConfig.EnvrConfig()	341
17.2.2.2	EnvrConfig.Set()	341
17.2.3	Model	342
17.2.3.1	Model.Model()	342
17.2.3.2	Model.AddCone()	342
17.2.3.3	Model.AddCone()	342
17.2.3.4	Model.AddCone()	343
17.2.3.5	Model.AddCone()	343
17.2.3.6	Model.AddConstr()	343
17.2.3.7	Model.AddConstr()	344
17.2.3.8	Model.AddConstr()	344
17.2.3.9	Model.AddConstr()	345
17.2.3.10	Model.AddConstr()	345
17.2.3.11	Model.AddConstrs()	345
17.2.3.12	Model.AddConstrs()	346
17.2.3.13	Model.AddConstrs()	346
17.2.3.14	Model.AddDenseMat()	346
17.2.3.15	Model.AddDenseMat()	347
17.2.3.16	Model.AddDiagMat()	347
17.2.3.17	Model.AddDiagMat()	347
17.2.3.18	Model.AddDiagMat()	348
17.2.3.19	Model.AddDiagMat()	348
17.2.3.20	Model.AddEyeMat()	348
17.2.3.21	Model.AddGenConstrIndicator()	349
17.2.3.22	Model.AddGenConstrIndicator()	349
17.2.3.23	Model.AddGenConstrIndicator()	349
17.2.3.24	Model.AddOnesMat()	350
17.2.3.25	Model.AddPsdConstr()	350
17.2.3.26	Model.AddPsdConstr()	350
17.2.3.27	Model.AddPsdConstr()	351
17.2.3.28	Model.AddPsdConstr()	351
17.2.3.29	Model.AddPsdVar()	352
17.2.3.30	Model.AddPsdVars()	352
17.2.3.31	Model.AddQConstr()	352
17.2.3.32	Model.AddQConstr()	353
17.2.3.33	Model.AddQConstr()	353
17.2.3.34	Model.AddSos()	353
17.2.3.35	Model.AddSos()	354
17.2.3.36	Model.AddSos()	354

17.2.3.37	Model.AddSparseMat()	354
17.2.3.38	Model.AddSymMat()	355
17.2.3.39	Model.AddVar()	355
17.2.3.40	Model.AddVar()	356
17.2.3.41	Model.AddVars()	356
17.2.3.42	Model.AddVars()	357
17.2.3.43	Model.AddVars()	357
17.2.3.44	Model.AddVars()	358
17.2.3.45	Model.AddVars()	358
17.2.3.46	Model.Clear()	359
17.2.3.47	Model.Clone()	359
17.2.3.48	Model.ComputeIIS()	359
17.2.3.49	Model.DelPsdObj()	359
17.2.3.50	Model.DelQuadObj()	360
17.2.3.51	Model.FeasRelax()	360
17.2.3.52	Model.FeasRelax()	360
17.2.3.53	Model.Get()	360
17.2.3.54	Model.Get()	361
17.2.3.55	Model.Get()	361
17.2.3.56	Model.Get()	361
17.2.3.57	Model.Get()	362
17.2.3.58	Model.Get()	362
17.2.3.59	Model.Get()	362
17.2.3.60	Model.Get()	362
17.2.3.61	Model.GetCoeff()	363
17.2.3.62	Model.GetCol()	363
17.2.3.63	Model.GetColBasis()	363
17.2.3.64	Model.GetCone()	363
17.2.3.65	Model.GetConeBuilders()	364
17.2.3.66	Model.GetConeBuilders()	364
17.2.3.67	Model.GetConeBuilders()	364
17.2.3.68	Model.GetCones()	364
17.2.3.69	Model.GetConstr()	365
17.2.3.70	Model.GetConstrBuilder()	365
17.2.3.71	Model.GetConstrBuilders()	365
17.2.3.72	Model.GetConstrByName()	365
17.2.3.73	Model.GetConstrLowerIIS()	366
17.2.3.74	Model.GetConstrLowerIIS()	366
17.2.3.75	Model.GetConstrs()	366
17.2.3.76	Model.GetConstrUpperIIS()	366
17.2.3.77	Model.GetConstrUpperIIS()	367
17.2.3.78	Model.GetDblAttr()	367
17.2.3.79	Model.GetDblParam()	367
17.2.3.80	Model.GetGenConstrIndicator()	367
17.2.3.81	Model.GetIndicatorIIS()	368
17.2.3.82	Model.GetIndicatorIIS()	368
17.2.3.83	Model.GetIntAttr()	368
17.2.3.84	Model.GetIntParam()	368
17.2.3.85	Model.GetLpSolution()	369
17.2.3.86	Model.GetObjective()	369
17.2.3.87	Model.GetParamInfo()	369
17.2.3.88	Model.GetParamInfo()	370
17.2.3.89	Model.GetPoolObjVal()	370
17.2.3.90	Model.GetPoolSolution()	370
17.2.3.91	Model.GetPoolSolution()	371
17.2.3.92	Model.GetPsdCoeff()	371
17.2.3.93	Model.GetPsdConstr()	371
17.2.3.94	Model.GetPsdConstrBuilder()	371

17.2.3.95	Model.GetPsdConstrBuilders()	372
17.2.3.96	Model.GetPsdConstrByName()	372
17.2.3.97	Model.GetPsdConstrs()	372
17.2.3.98	Model.GetPsdObjective()	372
17.2.3.99	Model.GetPsdRow()	372
17.2.3.100	Model.GetPsdVar()	373
17.2.3.101	Model.GetPsdVarByName()	373
17.2.3.102	Model.GetPsdVars()	373
17.2.3.103	Model.GetQConstr()	373
17.2.3.104	Model.GetQConstrBuilder()	374
17.2.3.105	Model.GetQConstrBuilders()	374
17.2.3.106	Model.GetQConstrByName()	374
17.2.3.107	Model.GetQConstrs()	374
17.2.3.108	Model.GetQuadObjective()	375
17.2.3.109	Model.GetQuadRow()	375
17.2.3.110	Model.GetRow()	375
17.2.3.111	Model.GetRowBasis()	375
17.2.3.112	Model.GetSolution()	376
17.2.3.113	Model.GetSos()	376
17.2.3.114	Model.GetSosBuilders()	376
17.2.3.115	Model.GetSosBuilders()	376
17.2.3.116	Model.GetSosBuilders()	377
17.2.3.117	Model.GetSOSIIS()	377
17.2.3.118	Model.GetSOSIIS()	377
17.2.3.119	Model.GetSoss()	377
17.2.3.120	Model.GetSymMat()	378
17.2.3.121	Model.GetVar()	378
17.2.3.122	Model.GetVarByName()	378
17.2.3.123	Model.GetVarLowerIIS()	378
17.2.3.124	Model.GetVarLowerIIS()	379
17.2.3.125	Model.GetVars()	379
17.2.3.126	Model.GetVarUpperIIS()	379
17.2.3.127	Model.GetVarUpperIIS()	379
17.2.3.128	Model.Interrupt()	380
17.2.3.129	Model.LoadMipStart()	380
17.2.3.130	Model.LoadTuneParam()	380
17.2.3.131	Model.Read()	380
17.2.3.132	Model.ReadBasis()	380
17.2.3.133	Model.ReadBin()	380
17.2.3.134	Model.ReadCbf()	381
17.2.3.135	Model.ReadLp()	381
17.2.3.136	Model.ReadMps()	381
17.2.3.137	Model.ReadMst()	381
17.2.3.138	Model.ReadParam()	381
17.2.3.139	Model.ReadSdpa()	382
17.2.3.140	Model.ReadSol()	382
17.2.3.141	Model.ReadTune()	382
17.2.3.142	Model.Remove()	382
17.2.3.143	Model.Remove()	382
17.2.3.144	Model.Remove()	383
17.2.3.145	Model.Remove()	383
17.2.3.146	Model.Remove()	383
17.2.3.147	Model.Remove()	383
17.2.3.148	Model.Remove()	383
17.2.3.149	Model.Remove()	384
17.2.3.150	Model.Remove()	384
17.2.3.151	Model.Remove()	384
17.2.3.152	Model.Remove()	384

17.2.3.153	Model.Remove()	384
17.2.3.154	Model.Remove()	385
17.2.3.155	Model.Remove()	385
17.2.3.156	Model.Remove()	385
17.2.3.157	Model.Remove()	385
17.2.3.158	Model.Reset()	385
17.2.3.159	Model.ResetAll()	386
17.2.3.160	Model.ResetParam()	386
17.2.3.161	Model.Set()	386
17.2.3.162	Model.Set()	386
17.2.3.163	Model.Set()	387
17.2.3.164	Model.Set()	387
17.2.3.165	Model.Set()	387
17.2.3.166	Model.Set()	388
17.2.3.167	Model.SetBasis()	388
17.2.3.168	Model.SetCoeff()	388
17.2.3.169	Model.SetDblParam()	389
17.2.3.170	Model.SetIntParam()	389
17.2.3.171	Model.SetLpSolution()	389
17.2.3.172	Model.SetMipStart()	389
17.2.3.173	Model.SetMipStart()	390
17.2.3.174	Model.SetMipStart()	390
17.2.3.175	Model.SetMipStart()	390
17.2.3.176	Model.SetObjConst()	390
17.2.3.177	Model.SetObjective()	390
17.2.3.178	Model.SetObjSense()	391
17.2.3.179	Model.SetPsdCoeff()	391
17.2.3.180	Model.SetPsdObjective()	391
17.2.3.181	Model.SetQuadObjective()	391
17.2.3.182	Model.SetSlackBasis()	392
17.2.3.183	Model.SetSolverLogFile()	392
17.2.3.184	Model.Solve()	392
17.2.3.185	Model.SolveLp()	392
17.2.3.186	Model.Tune()	392
17.2.3.187	Model.Write()	392
17.2.3.188	Model.WriteBasis()	393
17.2.3.189	Model.WriteBin()	393
17.2.3.190	Model.WriteIIS()	393
17.2.3.191	Model.WriteLp()	393
17.2.3.192	Model.WriteMps()	393
17.2.3.193	Model.WriteMpsStr()	394
17.2.3.194	Model.WriteMst()	394
17.2.3.195	Model.WriteParam()	394
17.2.3.196	Model.WritePoolSol()	394
17.2.3.197	Model.WriteRelax()	394
17.2.3.198	Model.WriteSol()	395
17.2.3.199	Model.WriteTuneParam()	395
17.2.4	Var	395
17.2.4.1	Var.Get()	395
17.2.4.2	Var.GetBasis()	395
17.2.4.3	Var.GetIdx()	396
17.2.4.4	Var.GetLowerIIS()	396
17.2.4.5	Var.GetName()	396
17.2.4.6	Var.GetType()	396
17.2.4.7	Var.GetUpperIIS()	396
17.2.4.8	Var.Remove()	397
17.2.4.9	Var.Set()	397
17.2.4.10	Var.SetName()	397

17.2.4.11	Var.SetType()	397
17.2.5	VarArray	397
17.2.5.1	VarArray.VarArray()	397
17.2.5.2	VarArray.GetVar()	398
17.2.5.3	VarArray.PushBack()	398
17.2.5.4	VarArray.Size()	398
17.2.6	Expr	398
17.2.6.1	Expr.Expr()	398
17.2.6.2	Expr.Expr()	399
17.2.6.3	Expr.AddConstant()	399
17.2.6.4	Expr.AddExpr()	399
17.2.6.5	Expr.AddTerm()	399
17.2.6.6	Expr.AddTerms()	399
17.2.6.7	Expr.AddTerms()	400
17.2.6.8	Expr.AddTerms()	400
17.2.6.9	Expr.AddTerms()	400
17.2.6.10	Expr.Clone()	400
17.2.6.11	Expr.GetCoeff()	400
17.2.6.12	Expr.GetConstant()	401
17.2.6.13	Expr.GetVar()	401
17.2.6.14	Expr.Remove()	401
17.2.6.15	Expr.Remove()	401
17.2.6.16	Expr.SetCoeff()	402
17.2.6.17	Expr.SetConstant()	402
17.2.6.18	Expr.Size()	402
17.2.7	Constraint	402
17.2.7.1	Constraint.Get()	402
17.2.7.2	Constraint.GetBasis()	403
17.2.7.3	Constraint.GetIdx()	403
17.2.7.4	Constraint.GetLowerIIS()	403
17.2.7.5	Constraint.GetName()	403
17.2.7.6	Constraint.GetUpperIIS()	403
17.2.7.7	Constraint.Remove()	404
17.2.7.8	Constraint.Set()	404
17.2.7.9	Constraint.SetName()	404
17.2.8	ConstrArray	404
17.2.8.1	ConstrArray.ConstrArray()	404
17.2.8.2	ConstrArray.GetConstr()	404
17.2.8.3	ConstrArray.PushBack()	405
17.2.8.4	ConstrArray.Size()	405
17.2.9	ConstrBuilder	405
17.2.9.1	ConstrBuilder.ConstrBuilder()	405
17.2.9.2	ConstrBuilder.GetExpr()	405
17.2.9.3	ConstrBuilder.GetRange()	405
17.2.9.4	ConstrBuilder.GetSense()	406
17.2.9.5	ConstrBuilder.Set()	406
17.2.9.6	ConstrBuilder.SetRange()	406
17.2.10	ConstrBuilderArray	406
17.2.10.1	ConstrBuilderArray.ConstrBuilderArray()	407
17.2.10.2	ConstrBuilderArray.GetBuilder()	407
17.2.10.3	ConstrBuilderArray.PushBack()	407
17.2.10.4	ConstrBuilderArray.Size()	407
17.2.11	Column	407
17.2.11.1	Column.Column()	408
17.2.11.2	Column.AddColumn()	408
17.2.11.3	Column.AddTerm()	408
17.2.11.4	Column.AddTerms()	408
17.2.11.5	Column.AddTerms()	408



17.2.11.6	Column.AddTerms()	409
17.2.11.7	Column.AddTerms()	409
17.2.11.8	Column.Clear()	409
17.2.11.9	Column.Clone()	409
17.2.11.10	Column.GetCoeff()	409
17.2.11.11	Column.GetConstr()	410
17.2.11.12	Column.Remove()	410
17.2.11.13	Column.Remove()	410
17.2.11.14	Column.Size()	410
17.2.12	ColumnArray	410
17.2.12.1	ColumnArray.ColumnArray()	411
17.2.12.2	ColumnArray.Clear()	411
17.2.12.3	ColumnArray.GetColumn()	411
17.2.12.4	ColumnArray.PushBack()	411
17.2.12.5	ColumnArray.Size()	411
17.2.13	Sos	412
17.2.13.1	Sos.GetIdx()	412
17.2.13.2	Sos.GetIIS()	412
17.2.13.3	Sos.Remove()	412
17.2.14	SosArray	412
17.2.14.1	SosArray.SosArray()	412
17.2.14.2	SosArray.PushBack()	413
17.2.14.3	SosArray.Size()	413
17.2.15	SosBuilder	413
17.2.15.1	SosBuilder.SosBuilder()	413
17.2.15.2	SosBuilder.GetSize()	413
17.2.15.3	SosBuilder.GetType()	413
17.2.15.4	SosBuilder.GetVar()	414
17.2.15.5	SosBuilder.GetWeight()	414
17.2.15.6	SosBuilder.GetWeights()	414
17.2.15.7	SosBuilder.Set()	414
17.2.16	SosBuilderArray	415
17.2.16.1	SosBuilderArray.SosBuilderArray()	415
17.2.16.2	SosBuilderArray.GetBuilder()	415
17.2.16.3	SosBuilderArray.PushBack()	415
17.2.16.4	SosBuilderArray.Size()	415
17.2.17	GenConstr	416
17.2.17.1	GenConstr.GetIdx()	416
17.2.17.2	GenConstr.GetIIS()	416
17.2.17.3	GenConstr.Remove()	416
17.2.18	GenConstrArray	416
17.2.18.1	GenConstrArray.GenConstrArray()	416
17.2.18.2	GenConstrArray.GetGenConstr()	417
17.2.18.3	GenConstrArray.PushBack()	417
17.2.18.4	GenConstrArray.Size()	417
17.2.19	GenConstrBuilder	417
17.2.19.1	GenConstrBuilder.GenConstrBuilder()	417
17.2.19.2	GenConstrBuilder.GetBinVal()	418
17.2.19.3	GenConstrBuilder.GetBinVar()	418
17.2.19.4	GenConstrBuilder.GetExpr()	418
17.2.19.5	GenConstrBuilder.GetSense()	418
17.2.19.6	GenConstrBuilder.Set()	418
17.2.20	GenConstrBuilderArray	419
17.2.20.1	GenConstrBuilderArray.GenConstrBuilderArray()	419
17.2.20.2	GenConstrBuilderArray.GetBuilder()	419
17.2.20.3	GenConstrBuilderArray.PushBack()	419
17.2.20.4	GenConstrBuilderArray.Size()	419
17.2.21	Cone	420



17.2.21.1	Cone.GetIdx()	420
17.2.21.2	Cone.Remove()	420
17.2.22	ConeArray	420
17.2.22.1	ConeArray.ConeArray()	420
17.2.22.2	ConeArray.PushBack()	420
17.2.22.3	ConeArray.Size()	421
17.2.23	ConeBuilder	421
17.2.23.1	ConeBuilder.ConeBuilder()	421
17.2.23.2	ConeBuilder.GetSize()	421
17.2.23.3	ConeBuilder.GetType()	421
17.2.23.4	ConeBuilder.GetVar()	421
17.2.23.5	ConeBuilder.Set()	422
17.2.24	ConeBuilderArray	422
17.2.24.1	ConeBuilderArray.ConeBuilderArray()	422
17.2.24.2	ConeBuilderArray.GetBuilder()	422
17.2.24.3	ConeBuilderArray.PushBack()	422
17.2.24.4	ConeBuilderArray.Size()	423
17.2.25	QuadExpr	423
17.2.25.1	QuadExpr.QuadExpr()	423
17.2.25.2	QuadExpr.QuadExpr()	423
17.2.25.3	QuadExpr.QuadExpr()	423
17.2.25.4	QuadExpr.QuadExpr()	424
17.2.25.5	QuadExpr.QuadExpr()	424
17.2.25.6	QuadExpr.AddConstant()	424
17.2.25.7	QuadExpr.AddLinExpr()	424
17.2.25.8	QuadExpr.AddLinExpr()	424
17.2.25.9	QuadExpr.AddQuadExpr()	425
17.2.25.10	QuadExpr.AddQuadExpr()	425
17.2.25.11	QuadExpr.AddTerm()	425
17.2.25.12	QuadExpr.AddTerm()	425
17.2.25.13	QuadExpr.AddTerms()	426
17.2.25.14	QuadExpr.AddTerms()	426
17.2.25.15	QuadExpr.AddTerms()	426
17.2.25.16	QuadExpr.AddTerms()	426
17.2.25.17	QuadExpr.AddTerms()	427
17.2.25.18	QuadExpr.AddTerms()	427
17.2.25.19	QuadExpr.Clone()	427
17.2.25.20	QuadExpr.Evaluate()	427
17.2.25.21	QuadExpr.GetCoeff()	428
17.2.25.22	QuadExpr.GetConstant()	428
17.2.25.23	QuadExpr.GetLinExpr()	428
17.2.25.24	QuadExpr.GetVar1()	428
17.2.25.25	QuadExpr.GetVar2()	429
17.2.25.26	QuadExpr.Remove()	429
17.2.25.27	QuadExpr.Remove()	429
17.2.25.28	QuadExpr.SetCoeff()	429
17.2.25.29	QuadExpr.SetConstant()	429
17.2.25.30	QuadExpr.Size()	430
17.2.26	QConstraint	430
17.2.26.1	QConstraint.Get()	430
17.2.26.2	QConstraint.GetIdx()	430
17.2.26.3	QConstraint.GetName()	430
17.2.26.4	QConstraint.GetRhs()	431
17.2.26.5	QConstraint.GetSense()	431
17.2.26.6	QConstraint.Remove()	431
17.2.26.7	QConstraint.Set()	431
17.2.26.8	QConstraint.SetName()	431
17.2.26.9	QConstraint.SetRhs()	432

17.2.26.1	<code>QConstraint.SetSense()</code>	432
17.2.27	<code>QConstrArray</code>	432
17.2.27.1	<code>QConstrArray.QConstrArray()</code>	432
17.2.27.2	<code>QConstrArray.GetQConstr()</code>	432
17.2.27.3	<code>QConstrArray.PushBack()</code>	433
17.2.27.4	<code>QConstrArray.Size()</code>	433
17.2.28	<code>QConstrBuilder</code>	433
17.2.28.1	<code>QConstrBuilder.QConstrBuilder()</code>	433
17.2.28.2	<code>QConstrBuilder.GetQuadExpr()</code>	433
17.2.28.3	<code>QConstrBuilder.GetSense()</code>	433
17.2.28.4	<code>QConstrBuilder.Set()</code>	434
17.2.29	<code>QConstrBuilderArray</code>	434
17.2.29.1	<code>QConstrBuilderArray.QConstrBuilderArray()</code>	434
17.2.29.2	<code>QConstrBuilderArray.GetBuilder()</code>	434
17.2.29.3	<code>QConstrBuilderArray.PushBack()</code>	434
17.2.29.4	<code>QConstrBuilderArray.Size()</code>	435
17.2.30	<code>PsdVar</code>	435
17.2.30.1	<code>PsdVar.Get()</code>	435
17.2.30.2	<code>PsdVar.GetDim()</code>	435
17.2.30.3	<code>PsdVar.GetIdx()</code>	435
17.2.30.4	<code>PsdVar.GetLen()</code>	436
17.2.30.5	<code>PsdVar.GetName()</code>	436
17.2.30.6	<code>PsdVar.Remove()</code>	436
17.2.31	<code>PsdVarArray</code>	436
17.2.31.1	<code>PsdVarArray.PsdVarArray()</code>	436
17.2.31.2	<code>PsdVarArray.GetPsdVar()</code>	436
17.2.31.3	<code>PsdVarArray.PushBack()</code>	437
17.2.31.4	<code>PsdVarArray.Reserve()</code>	437
17.2.31.5	<code>PsdVarArray.Size()</code>	437
17.2.32	<code>PsdExpr</code>	437
17.2.32.1	<code>PsdExpr.PsdExpr()</code>	437
17.2.32.2	<code>PsdExpr.PsdExpr()</code>	438
17.2.32.3	<code>PsdExpr.PsdExpr()</code>	438
17.2.32.4	<code>PsdExpr.PsdExpr()</code>	438
17.2.32.5	<code>PsdExpr.PsdExpr()</code>	438
17.2.32.6	<code>PsdExpr.AddConstant()</code>	438
17.2.32.7	<code>PsdExpr.AddLinExpr()</code>	439
17.2.32.8	<code>PsdExpr.AddLinExpr()</code>	439
17.2.32.9	<code>PsdExpr.AddPsdExpr()</code>	439
17.2.32.10	<code>PsdExpr.AddPsdExpr()</code>	439
17.2.32.11	<code>PsdExpr.AddTerm()</code>	439
17.2.32.12	<code>PsdExpr.AddTerm()</code>	440
17.2.32.13	<code>PsdExpr.AddTerm()</code>	440
17.2.32.14	<code>PsdExpr.AddTerms()</code>	440
17.2.32.15	<code>PsdExpr.AddTerms()</code>	440
17.2.32.16	<code>PsdExpr.AddTerms()</code>	441
17.2.32.17	<code>PsdExpr.AddTerms()</code>	441
17.2.32.18	<code>PsdExpr.AddTerms()</code>	441
17.2.32.19	<code>PsdExpr.AddTerms()</code>	441
17.2.32.20	<code>PsdExpr.Clone()</code>	442
17.2.32.21	<code>PsdExpr.Evaluate()</code>	442
17.2.32.22	<code>PsdExpr.GetCoeff()</code>	442
17.2.32.23	<code>PsdExpr.GetConstant()</code>	442
17.2.32.24	<code>PsdExpr.GetLinExpr()</code>	442
17.2.32.25	<code>PsdExpr.GetPsdVar()</code>	443
17.2.32.26	<code>PsdExpr.Multiply()</code>	443
17.2.32.27	<code>PsdExpr.Remove()</code>	443
17.2.32.28	<code>PsdExpr.Remove()</code>	443

17.2.32.2	PsdExpr.Remove()	443
17.2.32.3	PsdExpr.SetCoeff()	444
17.2.32.31	PsdExpr.SetConstant()	444
17.2.32.32	PsdExpr.Size()	444
17.2.33	PsdConstraint	444
17.2.33.1	PsdConstraint.Get()	444
17.2.33.2	PsdConstraint.GetIdx()	445
17.2.33.3	PsdConstraint.GetName()	445
17.2.33.4	PsdConstraint.Remove()	445
17.2.33.5	PsdConstraint.Set()	445
17.2.33.6	PsdConstraint.SetName()	445
17.2.34	PsdConstrArray	446
17.2.34.1	PsdConstrArray.PsdConstrArray()	446
17.2.34.2	PsdConstrArray.GetPsdConstr()	446
17.2.34.3	PsdConstrArray.PushBack()	446
17.2.34.4	PsdConstrArray.Reserve()	446
17.2.34.5	PsdConstrArray.Size()	447
17.2.35	PsdConstrBuilder	447
17.2.35.1	PsdConstrBuilder.PsdConstrBuilder()	447
17.2.35.2	PsdConstrBuilder.GetPsdExpr()	447
17.2.35.3	PsdConstrBuilder.GetRange()	447
17.2.35.4	PsdConstrBuilder.GetSense()	447
17.2.35.5	PsdConstrBuilder.Set()	448
17.2.35.6	PsdConstrBuilder.SetRange()	448
17.2.36	PsdConstrBuilderArray	448
17.2.36.1	PsdConstrBuilderArray.PsdConstrBuilderArray()	448
17.2.36.2	PsdConstrBuilderArray.GetBuilder()	448
17.2.36.3	PsdConstrBuilderArray.PushBack()	449
17.2.36.4	PsdConstrBuilderArray.Reserve()	449
17.2.36.5	PsdConstrBuilderArray.Size()	449
17.2.37	SymMatrix	449
17.2.37.1	SymMatrix.GetDim()	449
17.2.37.2	SymMatrix.GetIdx()	450
17.2.38	SymMatrixArray	450
17.2.38.1	SymMatrixArray.SymMatrixArray()	450
17.2.38.2	SymMatrixArray.GetMatrix()	450
17.2.38.3	SymMatrixArray.PushBack()	450
17.2.38.4	SymMatrixArray.Reserve()	451
17.2.38.5	SymMatrixArray.Size()	451
17.2.39	SymMatExpr	451
17.2.39.1	SymMatExpr.SymMatExpr()	451
17.2.39.2	SymMatExpr.SymMatExpr()	451
17.2.39.3	SymMatExpr.AddSymMatExpr()	452
17.2.39.4	SymMatExpr.AddTerm()	452
17.2.39.5	SymMatExpr.AddTerms()	452
17.2.39.6	SymMatExpr.AddTerms()	452
17.2.39.7	SymMatExpr.AddTerms()	453
17.2.39.8	SymMatExpr.Clone()	453
17.2.39.9	SymMatExpr.GetCoeff()	453
17.2.39.10	SymMatExpr.GetDim()	453
17.2.39.11	SymMatExpr.GetSymMat()	454
17.2.39.12	SymMatExpr.Multiply()	454
17.2.39.13	SymMatExpr.Remove()	454
17.2.39.14	SymMatExpr.Remove()	454
17.2.39.15	SymMatExpr.Reserve()	454
17.2.39.16	SymMatExpr.SetCoeff()	455
17.2.39.17	SymMatExpr.Size()	455
17.2.40	ProbBuffer	455

17.2.40.1	ProbBuffer.ProbBuffer()	455
17.2.40.2	ProbBuffer.GetData()	455
17.2.40.3	ProbBuffer.Resize()	456
17.2.40.4	ProbBuffer.Size()	456
17.2.41	CoptException	456
17.2.41.1	CoptException.CoptException()	456
17.2.41.2	CoptException.GetCode()	456
<b>18</b>	<b>Java API Reference</b>	<b>457</b>
18.1	Constants	457
18.1.1	General Constants	457
18.1.2	Attributes	457
18.1.3	Information	457
18.1.4	Parameters	458
18.2	Java Modeling Classes	458
18.2.1	Envr	458
18.2.1.1	Envr.Envr()	458
18.2.1.2	Envr.Envr()	458
18.2.1.3	Envr.Envr()	459
18.2.1.4	Envr.close()	459
18.2.1.5	Envr.createModel()	459
18.2.2	EnvrConfig	459
18.2.2.1	EnvrConfig.EnvrConfig()	459
18.2.2.2	EnvrConfig.set()	459
18.2.3	Model	460
18.2.3.1	Model.Model()	460
18.2.3.2	Model.addCone()	460
18.2.3.3	Model.addCone()	460
18.2.3.4	Model.addCone()	461
18.2.3.5	Model.addCone()	461
18.2.3.6	Model.addConstr()	461
18.2.3.7	Model.addConstr()	462
18.2.3.8	Model.addConstr()	462
18.2.3.9	Model.addConstr()	463
18.2.3.10	Model.addConstr()	463
18.2.3.11	Model.addConstrs()	463
18.2.3.12	Model.addConstrs()	464
18.2.3.13	Model.addConstrs()	464
18.2.3.14	Model.addDenseMat()	464
18.2.3.15	Model.addDenseMat()	465
18.2.3.16	Model.addDiagMat()	465
18.2.3.17	Model.addDiagMat()	465
18.2.3.18	Model.addDiagMat()	466
18.2.3.19	Model.addDiagMat()	466
18.2.3.20	Model.addEyeMat()	466
18.2.3.21	Model.addGenConstrIndicator()	467
18.2.3.22	Model.addGenConstrIndicator()	467
18.2.3.23	Model.addGenConstrIndicator()	467
18.2.3.24	Model.addOnesMat()	468
18.2.3.25	Model.addPsdConstr()	468
18.2.3.26	Model.addPsdConstr()	468
18.2.3.27	Model.addPsdConstr()	469
18.2.3.28	Model.addPsdConstr()	469
18.2.3.29	Model.addPsdVar()	470
18.2.3.30	Model.addPsdVars()	470
18.2.3.31	Model.addQConstr()	470
18.2.3.32	Model.addQConstr()	471
18.2.3.33	Model.addQConstr()	471

18.2.3.34	Model.addSos()	471
18.2.3.35	Model.addSos()	472
18.2.3.36	Model.addSos()	472
18.2.3.37	Model.addSparseMat()	472
18.2.3.38	Model.addSymMat()	473
18.2.3.39	Model.addVar()	473
18.2.3.40	Model.addVar()	474
18.2.3.41	Model.addVars()	474
18.2.3.42	Model.addVars()	475
18.2.3.43	Model.addVars()	475
18.2.3.44	Model.addVars()	476
18.2.3.45	Model.addVars()	476
18.2.3.46	Model.clear()	477
18.2.3.47	Model.clone()	477
18.2.3.48	Model.computeIIS()	477
18.2.3.49	Model.delPsdObj()	477
18.2.3.50	Model.delQuadObj()	477
18.2.3.51	Model.feasRelax()	477
18.2.3.52	Model.feasRelax()	478
18.2.3.53	Model.get()	478
18.2.3.54	Model.get()	478
18.2.3.55	Model.get()	479
18.2.3.56	Model.get()	479
18.2.3.57	Model.get()	479
18.2.3.58	Model.get()	479
18.2.3.59	Model.get()	480
18.2.3.60	Model.get()	480
18.2.3.61	Model.getCoeff()	480
18.2.3.62	Model.getCol()	481
18.2.3.63	Model.getColBasis()	481
18.2.3.64	Model.getCone()	481
18.2.3.65	Model.getConeBuilders()	481
18.2.3.66	Model.getConeBuilders()	482
18.2.3.67	Model.getConeBuilders()	482
18.2.3.68	Model.getCones()	482
18.2.3.69	Model.getConstr()	482
18.2.3.70	Model.getConstrBuilder()	483
18.2.3.71	Model.getConstrBuilders()	483
18.2.3.72	Model.getConstrByName()	483
18.2.3.73	Model.getConstrLowerIIS()	483
18.2.3.74	Model.getConstrLowerIIS()	484
18.2.3.75	Model.getConstrs()	484
18.2.3.76	Model.getConstrUpperIIS()	484
18.2.3.77	Model.getConstrUpperIIS()	484
18.2.3.78	Model.getDblAttr()	485
18.2.3.79	Model.getDblParam()	485
18.2.3.80	Model.getDblParamInfo()	485
18.2.3.81	Model.getGenConstrIndicator()	485
18.2.3.82	Model.getIndicatorIIS()	486
18.2.3.83	Model.getIndicatorIIS()	486
18.2.3.84	Model.getIntAttr()	486
18.2.3.85	Model.getIntParam()	486
18.2.3.86	Model.getIntParamInfo()	487
18.2.3.87	Model.getLpSolution()	487
18.2.3.88	Model.getObjective()	487
18.2.3.89	Model.getPoolObjVal()	487
18.2.3.90	Model.getPoolSolution()	488
18.2.3.91	Model.getPoolSolution()	488

18.2.3.92	Model.getPsdCoeff()	488
18.2.3.93	Model.getPsdConstr()	488
18.2.3.94	Model.getPsdConstrBuilder()	489
18.2.3.95	Model.getPsdConstrBuilders()	489
18.2.3.96	Model.getPsdConstrByName()	489
18.2.3.97	Model.getPsdConstrs()	489
18.2.3.98	Model.getPsdObjective()	490
18.2.3.99	Model.getPsdRow()	490
18.2.3.100	Model.getPsdVar()	490
18.2.3.101	Model.getPsdVarByName()	490
18.2.3.102	Model.getPsdVars()	491
18.2.3.103	Model.getQConstr()	491
18.2.3.104	Model.getQConstrBuilder()	491
18.2.3.105	Model.getQConstrBuilders()	491
18.2.3.106	Model.getQConstrByName()	492
18.2.3.107	Model.getQConstrs()	492
18.2.3.108	Model.getQuadObjective()	492
18.2.3.109	Model.getQuadRow()	492
18.2.3.110	Model.getRow()	493
18.2.3.111	Model.getRowBasis()	493
18.2.3.112	Model.getSolution()	493
18.2.3.113	Model.getSos()	493
18.2.3.114	Model.getSosBuilders()	494
18.2.3.115	Model.getSosBuilders()	494
18.2.3.116	Model.getSosBuilders()	494
18.2.3.117	Model.getSOSIIS()	494
18.2.3.118	Model.getSOSIIS()	495
18.2.3.119	Model.getSoss()	495
18.2.3.120	Model.getSymMat()	495
18.2.3.121	Model.getVar()	495
18.2.3.122	Model.getVarByName()	496
18.2.3.123	Model.getVarLowerIIS()	496
18.2.3.124	Model.getVarLowerIIS()	496
18.2.3.125	Model.getVars()	496
18.2.3.126	Model.getVarUpperIIS()	497
18.2.3.127	Model.getVarUpperIIS()	497
18.2.3.128	Model.interrupt()	497
18.2.3.129	Model.loadMipStart()	497
18.2.3.130	Model.loadTuneParam()	497
18.2.3.131	Model.read()	498
18.2.3.132	Model.readBasis()	498
18.2.3.133	Model.readBin()	498
18.2.3.134	Model.readCbf()	498
18.2.3.135	Model.readLp()	498
18.2.3.136	Model.readMps()	499
18.2.3.137	Model.readMst()	499
18.2.3.138	Model.readParam()	499
18.2.3.139	Model.readSdpa()	499
18.2.3.140	Model.readSol()	499
18.2.3.141	Model.readTune()	500
18.2.3.142	Model.remove()	500
18.2.3.143	Model.remove()	500
18.2.3.144	Model.remove()	500
18.2.3.145	Model.remove()	500
18.2.3.146	Model.remove()	501
18.2.3.147	Model.remove()	501
18.2.3.148	Model.remove()	501
18.2.3.149	Model.remove()	501

18.2.3.150	Model.remove()	501
18.2.3.151	Model.remove()	502
18.2.3.152	Model.remove()	502
18.2.3.153	Model.remove()	502
18.2.3.154	Model.remove()	502
18.2.3.155	Model.remove()	502
18.2.3.156	Model.remove()	503
18.2.3.157	Model.remove()	503
18.2.3.158	Model.reset()	503
18.2.3.159	Model.resetAll()	503
18.2.3.160	Model.resetParam()	503
18.2.3.161	Model.set()	503
18.2.3.162	Model.set()	504
18.2.3.163	Model.set()	504
18.2.3.164	Model.set()	504
18.2.3.165	Model.set()	505
18.2.3.166	Model.set()	505
18.2.3.167	Model.setBasis()	505
18.2.3.168	Model.setCoeff()	506
18.2.3.169	Model.setDblParam()	506
18.2.3.170	Model.setIntParam()	506
18.2.3.171	Model.setLpSolution()	506
18.2.3.172	Model.setMipStart()	507
18.2.3.173	Model.setMipStart()	507
18.2.3.174	Model.setMipStart()	507
18.2.3.175	Model.setMipStart()	507
18.2.3.176	Model.setObjConst()	508
18.2.3.177	Model.setObjective()	508
18.2.3.178	Model.setObjSense()	508
18.2.3.179	Model.setPsdCoeff()	508
18.2.3.180	Model.setPsdObjective()	509
18.2.3.181	Model.setQuadObjective()	509
18.2.3.182	Model.setSlackBasis()	509
18.2.3.183	Model.setSolverLogFile()	509
18.2.3.184	Model.solve()	509
18.2.3.185	Model.solveLp()	510
18.2.3.186	Model.tune()	510
18.2.3.187	Model.write()	510
18.2.3.188	Model.writeBasis()	510
18.2.3.189	Model.writeBin()	510
18.2.3.190	Model.writeIIS()	510
18.2.3.191	Model.writeLp()	511
18.2.3.192	Model.writeMps()	511
18.2.3.193	Model.writeMpsStr()	511
18.2.3.194	Model.writeMst()	511
18.2.3.195	Model.writeParam()	511
18.2.3.196	Model.writePoolSol()	512
18.2.3.197	Model.writeRelax()	512
18.2.3.198	Model.writeSol()	512
18.2.3.199	Model.writeTuneParam()	512
18.2.4	Var	512
18.2.4.1	Var.get()	513
18.2.4.2	Var.getBasis()	513
18.2.4.3	Var.getIdx()	513
18.2.4.4	Var.getLowerIIS()	513
18.2.4.5	Var.getName()	513
18.2.4.6	Var.getType()	514
18.2.4.7	Var.getUpperIIS()	514



18.2.4.8	Var.remove()	514
18.2.4.9	Var.set()	514
18.2.4.10	Var.setName()	514
18.2.4.11	Var.setType()	515
18.2.5	VarArray	515
18.2.5.1	VarArray.VarArray()	515
18.2.5.2	VarArray.getVar()	515
18.2.5.3	VarArray.pushBack()	515
18.2.5.4	VarArray.size()	516
18.2.6	Expr	516
18.2.6.1	Expr.Expr()	516
18.2.6.2	Expr.Expr()	516
18.2.6.3	Expr.Expr()	516
18.2.6.4	Expr.Expr()	516
18.2.6.5	Expr.addConstant()	517
18.2.6.6	Expr.addExpr()	517
18.2.6.7	Expr.addExpr()	517
18.2.6.8	Expr.addTerm()	517
18.2.6.9	Expr.addTerms()	517
18.2.6.10	Expr.addTerms()	518
18.2.6.11	Expr.addTerms()	518
18.2.6.12	Expr.addTerms()	518
18.2.6.13	Expr.clone()	518
18.2.6.14	Expr.evaluate()	518
18.2.6.15	Expr.getCoeff()	519
18.2.6.16	Expr.getConstant()	519
18.2.6.17	Expr.getVar()	519
18.2.6.18	Expr.remove()	519
18.2.6.19	Expr.remove()	520
18.2.6.20	Expr.setCoeff()	520
18.2.6.21	Expr.setConstant()	520
18.2.6.22	Expr.size()	520
18.2.7	Constraint	520
18.2.7.1	Constraint.get()	521
18.2.7.2	Constraint.getBasis()	521
18.2.7.3	Constraint.getIdx()	521
18.2.7.4	Constraint.getLowerIIS()	521
18.2.7.5	Constraint.getName()	521
18.2.7.6	Constraint.getUpperIIS()	522
18.2.7.7	Constraint.remove()	522
18.2.7.8	Constraint.set()	522
18.2.7.9	Constraint.setName()	522
18.2.8	ConstrArray	522
18.2.8.1	ConstrArray.ConstrArray()	522
18.2.8.2	ConstrArray.getConstr()	523
18.2.8.3	ConstrArray.pushBack()	523
18.2.8.4	ConstrArray.size()	523
18.2.9	ConstrBuilder	523
18.2.9.1	ConstrBuilder.ConstrBuilder()	523
18.2.9.2	ConstrBuilder.getExpr()	524
18.2.9.3	ConstrBuilder.getRange()	524
18.2.9.4	ConstrBuilder.getSense()	524
18.2.9.5	ConstrBuilder.set()	524
18.2.9.6	ConstrBuilder.setRange()	525
18.2.10	ConstrBuilderArray	525
18.2.10.1	ConstrBuilderArray.ConstrBuilderArray()	525
18.2.10.2	ConstrBuilderArray.getBuilder()	525
18.2.10.3	ConstrBuilderArray.pushBack()	525



18.2.10.4	ConstrBuilderArray.size()	526
18.2.11	Column	526
18.2.11.1	Column.Column()	526
18.2.11.2	Column.addColumn()	526
18.2.11.3	Column.addColumn()	526
18.2.11.4	Column.addTerm()	526
18.2.11.5	Column.addTerms()	527
18.2.11.6	Column.addTerms()	527
18.2.11.7	Column.addTerms()	527
18.2.11.8	Column.addTerms()	527
18.2.11.9	Column.clear()	528
18.2.11.10	Column.clone()	528
18.2.11.11	Column.getCoeff()	528
18.2.11.12	Column.getConstr()	528
18.2.11.13	Column.remove()	528
18.2.11.14	Column.remove()	529
18.2.11.15	Column.size()	529
18.2.12	ColumnArray	529
18.2.12.1	ColumnArray.ColumnArray()	529
18.2.12.2	ColumnArray.clear()	529
18.2.12.3	ColumnArray.getColumn()	529
18.2.12.4	ColumnArray.pushBack()	530
18.2.12.5	ColumnArray.size()	530
18.2.13	Sos	530
18.2.13.1	Sos.getIdx()	530
18.2.13.2	Sos.getIIS()	530
18.2.13.3	Sos.remove()	531
18.2.14	SosArray	531
18.2.14.1	SosArray.SosArray()	531
18.2.14.2	SosArray.pushBack()	531
18.2.14.3	SosArray.size()	531
18.2.15	SosBuilder	531
18.2.15.1	SosBuilder.SosBuilder()	532
18.2.15.2	SosBuilder.getSize()	532
18.2.15.3	SosBuilder.getType()	532
18.2.15.4	SosBuilder.getVar()	532
18.2.15.5	SosBuilder.getWeight()	532
18.2.15.6	SosBuilder.getWeights()	533
18.2.15.7	SosBuilder.set()	533
18.2.16	SosBuilderArray	533
18.2.16.1	SosBuilderArray.SosBuilderArray()	533
18.2.16.2	SosBuilderArray.getBuilder()	533
18.2.16.3	SosBuilderArray.pushBack()	534
18.2.16.4	SosBuilderArray.size()	534
18.2.17	GenConstr	534
18.2.17.1	GenConstr.getIdx()	534
18.2.17.2	GenConstr.getIIS()	534
18.2.17.3	GenConstr.remove()	535
18.2.18	GenConstrArray	535
18.2.18.1	GenConstrArray.GenConstrArray()	535
18.2.18.2	GenConstrArray.getGenConstr()	535
18.2.18.3	GenConstrArray.pushBack()	535
18.2.18.4	GenConstrArray.size()	535
18.2.19	GenConstrBuilder	536
18.2.19.1	GenConstrBuilder.GenConstrBuilder()	536
18.2.19.2	GenConstrBuilder.getBinVal()	536
18.2.19.3	GenConstrBuilder.getBinVar()	536
18.2.19.4	GenConstrBuilder.getExpr()	536

18.2.19.5	GenConstrBuilder.getSense()	536
18.2.19.6	GenConstrBuilder.set()	537
18.2.20	GenConstrBuilderArray	537
18.2.20.1	GenConstrBuilderArray.GenConstrBuilderArray()	537
18.2.20.2	GenConstrBuilderArray.getBuilder()	537
18.2.20.3	GenConstrBuilderArray.pushBack()	538
18.2.20.4	GenConstrBuilderArray.size()	538
18.2.21	Cone	538
18.2.21.1	Cone.getIdx()	538
18.2.21.2	Cone.remove()	538
18.2.22	ConeArray	539
18.2.22.1	ConeArray.ConeArray()	539
18.2.22.2	ConeArray.pushBack()	539
18.2.22.3	ConeArray.size()	539
18.2.23	ConeBuilder	539
18.2.23.1	ConeBuilder.ConeBuilder()	539
18.2.23.2	ConeBuilder.getSize()	540
18.2.23.3	ConeBuilder.getType()	540
18.2.23.4	ConeBuilder.getVar()	540
18.2.23.5	ConeBuilder.set()	540
18.2.24	ConeBuilderArray	540
18.2.24.1	ConeBuilderArray.ConeBuilderArray()	541
18.2.24.2	ConeBuilderArray.getBuilder()	541
18.2.24.3	ConeBuilderArray.pushBack()	541
18.2.24.4	ConeBuilderArray.size()	541
18.2.25	QuadExpr	541
18.2.25.1	QuadExpr.QuadExpr()	542
18.2.25.2	QuadExpr.QuadExpr()	542
18.2.25.3	QuadExpr.QuadExpr()	542
18.2.25.4	QuadExpr.QuadExpr()	542
18.2.25.5	QuadExpr.QuadExpr()	542
18.2.25.6	QuadExpr.QuadExpr()	543
18.2.25.7	QuadExpr.QuadExpr()	543
18.2.25.8	QuadExpr.addConstant()	543
18.2.25.9	QuadExpr.addLinExpr()	543
18.2.25.10	QuadExpr.addLinExpr()	543
18.2.25.11	QuadExpr.addQuadExpr()	544
18.2.25.12	QuadExpr.addQuadExpr()	544
18.2.25.13	QuadExpr.addTerm()	544
18.2.25.14	QuadExpr.addTerm()	544
18.2.25.15	QuadExpr.addTerms()	545
18.2.25.16	QuadExpr.addTerms()	545
18.2.25.17	QuadExpr.addTerms()	545
18.2.25.18	QuadExpr.addTerms()	545
18.2.25.19	QuadExpr.addTerms()	546
18.2.25.20	QuadExpr.addTerms()	546
18.2.25.21	QuadExpr.clone()	546
18.2.25.22	QuadExpr.evaluate()	546
18.2.25.23	QuadExpr.getCoeff()	547
18.2.25.24	QuadExpr.getConstant()	547
18.2.25.25	QuadExpr.getLinExpr()	547
18.2.25.26	QuadExpr.getVar1()	547
18.2.25.27	QuadExpr.getVar2()	548
18.2.25.28	QuadExpr.remove()	548
18.2.25.29	QuadExpr.remove()	548
18.2.25.30	QuadExpr.setCoeff()	548
18.2.25.31	QuadExpr.setConstant()	548
18.2.25.32	QuadExpr.size()	549

18.2.26	QConstraint	549
18.2.26.1	QConstraint.get()	549
18.2.26.2	QConstraint.getIdx()	549
18.2.26.3	QConstraint.getName()	549
18.2.26.4	QConstraint.getRhs()	550
18.2.26.5	QConstraint.getSense()	550
18.2.26.6	QConstraint.remove()	550
18.2.26.7	QConstraint.set()	550
18.2.26.8	QConstraint.setName()	550
18.2.26.9	QConstraint.setRhs()	551
18.2.26.10	QConstraint.setSense()	551
18.2.27	QConstrArray	551
18.2.27.1	QConstrArray.QConstrArray()	551
18.2.27.2	QConstrArray.getQConstr()	551
18.2.27.3	QConstrArray.pushBack()	552
18.2.27.4	QConstrArray.size()	552
18.2.28	QConstrBuilder	552
18.2.28.1	QConstrBuilder.QConstrBuilder()	552
18.2.28.2	QConstrBuilder.getQuadExpr()	552
18.2.28.3	QConstrBuilder.getSense()	552
18.2.28.4	QConstrBuilder.set()	553
18.2.29	QConstrBuilderArray	553
18.2.29.1	QConstrBuilderArray.QConstrBuilderArray()	553
18.2.29.2	QConstrBuilderArray.getBuilder()	553
18.2.29.3	QConstrBuilderArray.pushBack()	553
18.2.29.4	QConstrBuilderArray.size()	554
18.2.30	PsdVar	554
18.2.30.1	PsdVar.get()	554
18.2.30.2	PsdVar.getDim()	554
18.2.30.3	PsdVar.getIdx()	554
18.2.30.4	PsdVar.getLen()	555
18.2.30.5	PsdVar.getName()	555
18.2.30.6	PsdVar.remove()	555
18.2.31	PsdVarArray	555
18.2.31.1	PsdVarArray.PsdVarArray()	555
18.2.31.2	PsdVarArray.getPsdVar()	555
18.2.31.3	PsdVarArray.pushBack()	556
18.2.31.4	PsdVarArray.reserve()	556
18.2.31.5	PsdVarArray.size()	556
18.2.32	PsdExpr	556
18.2.32.1	PsdExpr.PsdExpr()	556
18.2.32.2	PsdExpr.PsdExpr()	557
18.2.32.3	PsdExpr.PsdExpr()	557
18.2.32.4	PsdExpr.PsdExpr()	557
18.2.32.5	PsdExpr.PsdExpr()	557
18.2.32.6	PsdExpr.PsdExpr()	557
18.2.32.7	PsdExpr.addConstant()	558
18.2.32.8	PsdExpr.addLinExpr()	558
18.2.32.9	PsdExpr.addLinExpr()	558
18.2.32.10	PsdExpr.addPsdExpr()	558
18.2.32.11	PsdExpr.addPsdExpr()	558
18.2.32.12	PsdExpr.addTerm()	559
18.2.32.13	PsdExpr.addTerm()	559
18.2.32.14	PsdExpr.addTerm()	559
18.2.32.15	PsdExpr.addTerms()	559
18.2.32.16	PsdExpr.addTerms()	560
18.2.32.17	PsdExpr.addTerms()	560
18.2.32.18	PsdExpr.addTerms()	560

18.2.32.1	<code>PsdExpr.addTerms()</code>	560
18.2.32.2	<code>PsdExpr.addTerms()</code>	561
18.2.32.21	<code>PsdExpr.clone()</code>	561
18.2.32.22	<code>PsdExpr.evaluate()</code>	561
18.2.32.23	<code>PsdExpr.getCoeff()</code>	561
18.2.32.24	<code>PsdExpr.getConstant()</code>	561
18.2.32.25	<code>PsdExpr.getLinExpr()</code>	562
18.2.32.26	<code>PsdExpr.getPsdVar()</code>	562
18.2.32.27	<code>PsdExpr.multiply()</code>	562
18.2.32.28	<code>PsdExpr.remove()</code>	562
18.2.32.29	<code>PsdExpr.remove()</code>	562
18.2.32.30	<code>PsdExpr.remove()</code>	563
18.2.32.31	<code>PsdExpr.setCoeff()</code>	563
18.2.32.32	<code>PsdExpr.setConstant()</code>	563
18.2.32.33	<code>PsdExpr.size()</code>	563
18.2.33	<code>PsdConstraint</code>	563
18.2.33.1	<code>PsdConstraint.get()</code>	564
18.2.33.2	<code>PsdConstraint.getIdx()</code>	564
18.2.33.3	<code>PsdConstraint.getName()</code>	564
18.2.33.4	<code>PsdConstraint.remove()</code>	564
18.2.33.5	<code>PsdConstraint.set()</code>	564
18.2.33.6	<code>PsdConstraint.setName()</code>	565
18.2.34	<code>PsdConstrArray</code>	565
18.2.34.1	<code>PsdConstrArray.PsdConstrArray()</code>	565
18.2.34.2	<code>PsdConstrArray.getPsdConstr()</code>	565
18.2.34.3	<code>PsdConstrArray.pushBack()</code>	565
18.2.34.4	<code>PsdConstrArray.reserve()</code>	566
18.2.34.5	<code>PsdConstrArray.size()</code>	566
18.2.35	<code>PsdConstrBuilder</code>	566
18.2.35.1	<code>PsdConstrBuilder.PsdConstrBuilder()</code>	566
18.2.35.2	<code>PsdConstrBuilder.getPsdExpr()</code>	566
18.2.35.3	<code>PsdConstrBuilder.getRange()</code>	566
18.2.35.4	<code>PsdConstrBuilder.getSense()</code>	567
18.2.35.5	<code>PsdConstrBuilder.set()</code>	567
18.2.35.6	<code>PsdConstrBuilder.setRange()</code>	567
18.2.36	<code>PsdConstrBuilderArray</code>	567
18.2.36.1	<code>PsdConstrBuilderArray.PsdConstrBuilderArray()</code>	567
18.2.36.2	<code>PsdConstrBuilderArray.getBuilder()</code>	568
18.2.36.3	<code>PsdConstrBuilderArray.pushBack()</code>	568
18.2.36.4	<code>PsdConstrBuilderArray.reserve()</code>	568
18.2.36.5	<code>PsdConstrBuilderArray.size()</code>	568
18.2.37	<code>SymMatrix</code>	568
18.2.37.1	<code>SymMatrix.getDim()</code>	569
18.2.37.2	<code>SymMatrix.getIdx()</code>	569
18.2.38	<code>SymMatrixArray</code>	569
18.2.38.1	<code>SymMatrixArray.SymMatrixArray()</code>	569
18.2.38.2	<code>SymMatrixArray.getMatrix()</code>	569
18.2.38.3	<code>SymMatrixArray.pushBack()</code>	570
18.2.38.4	<code>SymMatrixArray.reserve()</code>	570
18.2.38.5	<code>SymMatrixArray.size()</code>	570
18.2.39	<code>SymMatExpr</code>	570
18.2.39.1	<code>SymMatExpr.SymMatExpr()</code>	570
18.2.39.2	<code>SymMatExpr.SymMatExpr()</code>	570
18.2.39.3	<code>SymMatExpr.addSymMatExpr()</code>	571
18.2.39.4	<code>SymMatExpr.addTerm()</code>	571
18.2.39.5	<code>SymMatExpr.addTerms()</code>	571
18.2.39.6	<code>SymMatExpr.addTerms()</code>	571
18.2.39.7	<code>SymMatExpr.addTerms()</code>	572

18.2.39.8	SymMatExpr.clone()	572
18.2.39.9	SymMatExpr.getCoeff()	572
18.2.39.10	SymMatExpr.getDim()	572
18.2.39.11	SymMatExpr.getSymMat()	573
18.2.39.12	SymMatExpr.multiply()	573
18.2.39.13	SymMatExpr.remove()	573
18.2.39.14	SymMatExpr.remove()	573
18.2.39.15	SymMatExpr.reserve()	573
18.2.39.16	SymMatExpr.setCoeff()	574
18.2.39.17	SymMatExpr.size()	574
18.2.40	ProbBuffer	574
18.2.40.1	ProbBuffer.ProbBuffer()	574
18.2.40.2	ProbBuffer.getData()	574
18.2.40.3	ProbBuffer.resize()	575
18.2.40.4	ProbBuffer.size()	575
18.2.41	CoptException	575
18.2.41.1	CoptException.CoptException()	575
18.2.41.2	CoptException.getCode()	575
<b>19</b>	<b>Python API Reference</b>	<b>577</b>
19.1	Constants	577
19.1.1	General Constants	577
19.1.2	Attributes	577
19.1.3	Information	578
19.1.4	Parameters	578
19.2	Python Modeling Classes	578
19.2.1	EnvrConfig Class	578
19.2.1.1	EnvrConfig()	578
19.2.1.2	EnvrConfig.set()	579
19.2.2	Envr Class	579
19.2.2.1	Envr()	579
19.2.2.2	Envr.createModel()	579
19.2.2.3	Envr.close()	580
19.2.3	Model Class	580
19.2.3.1	Model.addVar()	580
19.2.3.2	Model.addVars()	581
19.2.3.3	Model.addConstr()	582
19.2.3.4	Model.addBoundConstr()	582
19.2.3.5	Model.addConstrs()	583
19.2.3.6	Model.addSOS()	583
19.2.3.7	Model.addGenConstrIndicator()	584
19.2.3.8	Model.addConeByDim()	585
19.2.3.9	Model.addCone()	585
19.2.3.10	Model.addQConstr()	586
19.2.3.11	Model.addPsdVar()	586
19.2.3.12	Model.addPsdVars()	587
19.2.3.13	Model.addSparseMat()	587
19.2.3.14	Model.addDenseMat()	588
19.2.3.15	Model.addDiagMat()	588
19.2.3.16	Model.addOnesMat()	588
19.2.3.17	Model.addEyeMat()	589
19.2.3.18	Model.setObjective()	589
19.2.3.19	Model.setObjSense()	590
19.2.3.20	Model.setObjConst()	590
19.2.3.21	Model.getObjective()	590
19.2.3.22	Model.delQuadObj()	591
19.2.3.23	Model.delPsdObj()	591
19.2.3.24	Model.getCol()	591

19.2.3.25	Model.getRow()	591
19.2.3.26	Model.getQuadRow()	592
19.2.3.27	Model.getPsdRow()	592
19.2.3.28	Model.getVar()	592
19.2.3.29	Model.getVarByName()	593
19.2.3.30	Model.getVars()	593
19.2.3.31	Model.getConstr()	593
19.2.3.32	Model.getConstrByName()	594
19.2.3.33	Model.getConstrs()	594
19.2.3.34	Model.getConstrBuilders()	594
19.2.3.35	Model.getSOS(sos)	595
19.2.3.36	Model.getSOSs()	595
19.2.3.37	Model.getSOSBuilders()	595
19.2.3.38	Model.getGenConstrIndicator()	596
19.2.3.39	Model.getCones()	596
19.2.3.40	Model.getConeBuilders()	596
19.2.3.41	Model.getQConstr()	597
19.2.3.42	Model.getQConstrByName()	597
19.2.3.43	Model.getQConstrs()	597
19.2.3.44	Model.getQConstrBuilders()	598
19.2.3.45	Model.getPsdVar()	598
19.2.3.46	Model.getPsdVarByName()	599
19.2.3.47	Model.getPsdVars()	599
19.2.3.48	Model.getPsdConstr()	599
19.2.3.49	Model.getPsdConstrByName()	600
19.2.3.50	Model.getPsdConstrs()	600
19.2.3.51	Model.getPsdConstrBuilders()	600
19.2.3.52	Model.getCoeff()	601
19.2.3.53	Model.setCoeff()	601
19.2.3.54	Model.getA()	602
19.2.3.55	Model.loadMatrix()	602
19.2.3.56	Model.getLpSolution()	603
19.2.3.57	Model.setLpSolution()	603
19.2.3.58	Model.getValues()	603
19.2.3.59	Model.getRedcosts()	604
19.2.3.60	Model.getSlacks()	604
19.2.3.61	Model.getDUALS()	604
19.2.3.62	Model.getVarBasis()	604
19.2.3.63	Model.getConstrBasis()	605
19.2.3.64	Model.getPoolObjVal()	605
19.2.3.65	Model.getPoolSolution()	606
19.2.3.66	Model.getVarLowerIIS()	606
19.2.3.67	Model.getVarUpperIIS()	607
19.2.3.68	Model.getConstrLowerIIS()	607
19.2.3.69	Model.getConstrUpperIIS()	608
19.2.3.70	Model.getSOSIIS()	608
19.2.3.71	Model.getIndicatorIIS()	609
19.2.3.72	Model.getAttr()	609
19.2.3.73	Model.getInfo()	609
19.2.3.74	Model.getParam()	610
19.2.3.75	Model.getParamInfo()	610
19.2.3.76	Model.setBasis()	611
19.2.3.77	Model.setSlackBasis()	611
19.2.3.78	Model.setVarType()	611
19.2.3.79	Model.setMipStart()	612
19.2.3.80	Model.loadMipStart()	613
19.2.3.81	Model.setInfo()	613
19.2.3.82	Model.setParam()	614

19.2.3.83	Model.resetParam()	614
19.2.3.84	Model.read()	614
19.2.3.85	Model.readMps()	615
19.2.3.86	Model.readLp()	615
19.2.3.87	Model.readSdpa()	616
19.2.3.88	Model.readCbf()	616
19.2.3.89	Model.readBin()	616
19.2.3.90	Model.readSol()	617
19.2.3.91	Model.readBasis()	617
19.2.3.92	Model.readMst()	617
19.2.3.93	Model.readParam()	618
19.2.3.94	Model.readTune()	618
19.2.3.95	Model.write()	619
19.2.3.96	Model.writeMps()	619
19.2.3.97	Model.writeMpsStr()	620
19.2.3.98	Model.writeLp()	620
19.2.3.99	Model.writeCbf()	620
19.2.3.100	Model.writeBin()	621
19.2.3.101	Model.writeIIS()	621
19.2.3.102	Model.writeRelax()	621
19.2.3.103	Model.writeSol()	622
19.2.3.104	Model.writePoolSol()	622
19.2.3.105	Model.writeBasis()	622
19.2.3.106	Model.writeMst()	623
19.2.3.107	Model.writeParam()	623
19.2.3.108	Model.writeTuneParam()	623
19.2.3.109	Model.setLogFile()	624
19.2.3.110	Model.setLogCallback()	624
19.2.3.111	Model.solve()	624
19.2.3.112	Model.solveLP()	625
19.2.3.113	Model.computeIIS()	625
19.2.3.114	Model.feasRelax()	625
19.2.3.115	Model.feasRelaxS()	626
19.2.3.116	Model.tune()	626
19.2.3.117	Model.loadTuneParam()	626
19.2.3.118	Model.interrupt()	627
19.2.3.119	Model.remove()	627
19.2.3.120	Model.reset()	628
19.2.3.121	Model.clear()	628
19.2.3.122	Model.clone()	628
19.2.4	Var Class	628
19.2.4.1	Var.getType()	629
19.2.4.2	Var.getName()	629
19.2.4.3	Var.getBasis()	629
19.2.4.4	Var.getLowerIIS()	629
19.2.4.5	Var.getUpperIIS()	630
19.2.4.6	Var.getIdx()	630
19.2.4.7	Var.setType()	630
19.2.4.8	Var.setName()	630
19.2.4.9	Var.getInfo()	631
19.2.4.10	Var.setInfo()	631
19.2.4.11	Var.remove()	632
19.2.5	VarArray Class	632
19.2.5.1	VarArray()	632
19.2.5.2	VarArray.pushBack()	632
19.2.5.3	VarArray.getVar()	633
19.2.5.4	VarArray.getAll()	633
19.2.5.5	VarArray.getSize()	633



19.2.6	PsdVar Class	634
19.2.6.1	PsdVar.getName()	634
19.2.6.2	PsdVar.getIdx()	634
19.2.6.3	PsdVar.getDim()	634
19.2.6.4	PsdVar.getLen()	634
19.2.6.5	PsdVar.setName()	635
19.2.6.6	PsdVar.getInfo()	635
19.2.6.7	PsdVar.remove()	635
19.2.7	PsdVarArray Class	636
19.2.7.1	PsdVarArray()	636
19.2.7.2	PsdVarArray.pushBack()	636
19.2.7.3	PsdVarArray.getPsdVar()	637
19.2.7.4	PsdVarArray.getSize()	637
19.2.8	SymMatrix Class	637
19.2.8.1	SymMatrix.getIdx()	637
19.2.8.2	SymMatrix.getDim()	638
19.2.9	SymMatrixArray Class	638
19.2.9.1	SymMatrixArray()	638
19.2.9.2	SymMatrixArray.pushBack()	638
19.2.9.3	SymMatrixArray.getMatrix()	639
19.2.9.4	SymMatrixArray.getSize()	639
19.2.10	Constraint Class	639
19.2.10.1	Constraint.getName()	640
19.2.10.2	Constraint.getBasis()	640
19.2.10.3	Constraint.getLowerIIS()	640
19.2.10.4	Constraint.getUpperIIS()	640
19.2.10.5	Constraint.getIdx()	641
19.2.10.6	Constraint.setName()	641
19.2.10.7	Constraint.getInfo()	641
19.2.10.8	Constraint.setInfo()	642
19.2.10.9	Constraint.remove()	642
19.2.11	ConstrArray Class	642
19.2.11.1	ConstrArray()	642
19.2.11.2	ConstrArray.pushBack()	643
19.2.11.3	ConstrArray.getConstr()	643
19.2.11.4	ConstrArray.getAll()	644
19.2.11.5	ConstrArray.getSize()	644
19.2.12	ConstrBuilder Class	644
19.2.12.1	ConstrBuilder()	644
19.2.12.2	ConstrBuilder.setBuilder()	644
19.2.12.3	ConstrBuilder.getExpr()	645
19.2.12.4	ConstrBuilder.getSense()	645
19.2.13	ConstrBuilderArray Class	645
19.2.13.1	ConstrBuilderArray()	645
19.2.13.2	ConstrBuilderArray.pushBack()	646
19.2.13.3	ConstrBuilderArray.getBuilder()	646
19.2.13.4	ConstrBuilderArray.getSize()	647
19.2.14	QConstraint Class	647
19.2.14.1	QConstraint.getName()	647
19.2.14.2	QConstraint.getRhs()	647
19.2.14.3	QConstraint.getSense()	648
19.2.14.4	QConstraint.getIdx()	648
19.2.14.5	QConstraint.setName()	648
19.2.14.6	QConstraint.setRhs()	648
19.2.14.7	QConstraint.setSense()	649
19.2.14.8	QConstraint.getInfo()	649
19.2.14.9	QConstraint.setInfo()	649
19.2.14.10	QConstraint.remove()	650



19.2.15	QConstrArray Class	650
19.2.15.1	QConstrArray()	650
19.2.15.2	QConstrArray.pushBack()	651
19.2.15.3	QConstrArray.getQConstr()	651
19.2.15.4	QConstrArray.getSize()	651
19.2.16	QConstrBuilder Class	652
19.2.16.1	QConstrBuilder()	652
19.2.16.2	QConstrBuilder.setBuilder()	652
19.2.16.3	QConstrBuilder.getQuadExpr()	652
19.2.16.4	QConstrBuilder.getSense()	653
19.2.17	QConstrBuilderArray Class	653
19.2.17.1	QConstrBuilderArray()	653
19.2.17.2	QConstrBuilderArray.pushBack()	654
19.2.17.3	QConstrBuilderArray.getBuilder()	654
19.2.17.4	QConstrBuilderArray.getSize()	654
19.2.18	PsdConstraint Class	655
19.2.18.1	PsdConstraint.getName()	655
19.2.18.2	PsdConstraint.getIdx()	655
19.2.18.3	PsdConstraint.setName()	655
19.2.18.4	PsdConstraint.getInfo()	656
19.2.18.5	PsdConstraint.setInfo()	656
19.2.18.6	PsdConstraint.remove()	656
19.2.19	PsdConstrArray Class	657
19.2.19.1	PsdConstrArray()	657
19.2.19.2	PsdConstrArray.pushBack()	657
19.2.19.3	PsdConstrArray.getPsdConstr()	658
19.2.19.4	PsdConstrArray.getSize()	658
19.2.20	PsdConstrBuilder Class	658
19.2.20.1	PsdConstrBuilder()	658
19.2.20.2	PsdConstrBuilder.setBuilder()	659
19.2.20.3	PsdConstrBuilder.setRange()	659
19.2.20.4	PsdConstrBuilder.getPsdExpr()	660
19.2.20.5	PsdConstrBuilder.getSense()	660
19.2.20.6	PsdConstrBuilder.getRange()	660
19.2.21	PsdConstrBuilderArray Class	660
19.2.21.1	PsdConstrBuilderArray()	661
19.2.21.2	PsdConstrBuilderArray.pushBack()	661
19.2.21.3	PsdConstrBuilderArray.getBuilder()	662
19.2.21.4	PsdConstrBuilderArray.getSize()	662
19.2.22	SOS Class	662
19.2.22.1	SOS.getIdx()	662
19.2.22.2	SOS.remove()	663
19.2.23	SOSArray Class	663
19.2.23.1	SOSArray()	663
19.2.23.2	SOSArray.pushBack()	663
19.2.23.3	SOSArray.getSOS()	664
19.2.23.4	SOSArray.getSize()	664
19.2.24	SOSBuilder Class	664
19.2.24.1	SOSBuilder()	664
19.2.24.2	SOSBuilder.setBuilder()	665
19.2.24.3	SOSBuilder.getType()	665
19.2.24.4	SOSBuilder.getVar()	665
19.2.24.5	SOSBuilder.getVars()	666
19.2.24.6	SOSBuilder.getWeight()	666
19.2.24.7	SOSBuilder.getWeights()	666
19.2.24.8	SOSBuilder.getSize()	667
19.2.25	SOSBuilderArray Class	667
19.2.25.1	SOSBuilderArray()	667

19.2.25.2	SOSBuilderArray.pushBack()	667
19.2.25.3	SOSBuilderArray.getBuilder()	668
19.2.25.4	SOSBuilderArray.getSize()	668
19.2.26	Cone Class	668
19.2.26.1	Cone.getIdx()	668
19.2.26.2	Cone.remove()	669
19.2.27	ConeArray Class	669
19.2.27.1	ConeArray()	669
19.2.27.2	ConeArray.pushBack()	669
19.2.27.3	ConeArray.getCone()	670
19.2.27.4	ConeArray.getSize()	670
19.2.28	ConeBuilder Class	670
19.2.28.1	ConeBuilder()	670
19.2.28.2	ConeBuilder.setBuilder()	671
19.2.28.3	ConeBuilder.getType()	671
19.2.28.4	ConeBuilder.getVar()	671
19.2.28.5	ConeBuilder.getVars()	672
19.2.28.6	ConeBuilder.getSize()	672
19.2.29	ConeBuilderArray Class	672
19.2.29.1	ConeBuilderArray()	672
19.2.29.2	ConeBuilderArray.pushBack()	673
19.2.29.3	ConeBuilderArray.getBuilder()	673
19.2.29.4	ConeBuilderArray.getSize()	673
19.2.30	GenConstr Class	674
19.2.30.1	GenConstr.getIdx()	674
19.2.30.2	GenConstr.remove()	674
19.2.31	GenConstrArray Class	674
19.2.31.1	GenConstrArray()	674
19.2.31.2	GenConstrArray.pushBack()	675
19.2.31.3	GenConstrArray.getGenConstr()	675
19.2.31.4	GenConstrArray.getSize()	676
19.2.32	GenConstrBuilder Class	676
19.2.32.1	GenConstrBuilder()	676
19.2.32.2	GenConstrBuilder.setBuilder()	676
19.2.32.3	GenConstrBuilder.getBinVar()	677
19.2.32.4	GenConstrBuilder.getBinVal()	677
19.2.32.5	GenConstrBuilder.getExpr()	677
19.2.32.6	GenConstrBuilder.getSense()	678
19.2.33	GenConstrBuilderArray Class	678
19.2.33.1	GenConstrBuilderArray()	678
19.2.33.2	GenConstrBuilderArray.pushBack()	678
19.2.33.3	GenConstrBuilderArray.getBuilder()	679
19.2.33.4	GenConstrBuilderArray.getSize()	679
19.2.34	Column Class	679
19.2.34.1	Column()	680
19.2.34.2	Column.getCoeff()	680
19.2.34.3	Column.getConstr()	681
19.2.34.4	Column.getSize()	681
19.2.34.5	Column.addTerm()	681
19.2.34.6	Column.addTerms()	682
19.2.34.7	Column.addColumn()	682
19.2.34.8	Column.clone()	682
19.2.34.9	Column.remove()	683
19.2.34.10	Column.clear()	683
19.2.35	ColumnArray Class	683
19.2.35.1	ColumnArray()	683
19.2.35.2	ColumnArray.pushBack()	684
19.2.35.3	ColumnArray.getColumn()	684

19.2.35.4	ColumnArray.getSize()	685
19.2.35.5	ColumnArray.clear()	685
19.2.36	ExprBuilder Class	685
19.2.36.1	ExprBuilder()	685
19.2.36.2	ExprBuilder.getSize()	686
19.2.36.3	ExprBuilder.getCoeff()	686
19.2.36.4	ExprBuilder.getVar()	686
19.2.36.5	ExprBuilder.getConstant()	687
19.2.36.6	ExprBuilder.addTerm()	687
19.2.36.7	ExprBuilder.addExpr()	687
19.2.36.8	ExprBuilder.clone()	688
19.2.36.9	ExprBuilder.getExpr()	688
19.2.37	LinExpr Class	688
19.2.37.1	LinExpr()	688
19.2.37.2	LinExpr.setCoeff()	689
19.2.37.3	LinExpr.getCoeff()	689
19.2.37.4	LinExpr.getVar()	690
19.2.37.5	LinExpr.getConstant()	690
19.2.37.6	LinExpr.getValue()	690
19.2.37.7	LinExpr.getSize()	690
19.2.37.8	LinExpr.setConstant()	691
19.2.37.9	LinExpr.addConstant()	691
19.2.37.10	LinExpr.addTerm()	691
19.2.37.11	LinExpr.addTerms()	692
19.2.37.12	LinExpr.addExpr()	692
19.2.37.13	LinExpr.clone()	693
19.2.37.14	LinExpr.reserve()	693
19.2.37.15	LinExpr.remove()	693
19.2.38	QuadExpr Class	694
19.2.38.1	QuadExpr()	694
19.2.38.2	QuadExpr.setCoeff()	694
19.2.38.3	QuadExpr.getCoeff()	695
19.2.38.4	QuadExpr.getVar1()	695
19.2.38.5	QuadExpr.getVar2()	695
19.2.38.6	QuadExpr.getLinExpr()	696
19.2.38.7	QuadExpr.getConstant()	696
19.2.38.8	QuadExpr.getValue()	696
19.2.38.9	QuadExpr.getSize()	696
19.2.38.10	QuadExpr.setConstant()	697
19.2.38.11	QuadExpr.addConstant()	697
19.2.38.12	QuadExpr.addTerm()	697
19.2.38.13	QuadExpr.addTerms()	698
19.2.38.14	QuadExpr.addLinExpr()	698
19.2.38.15	QuadExpr.addQuadExpr()	699
19.2.38.16	QuadExpr.clone()	699
19.2.38.17	QuadExpr.reserve()	699
19.2.38.18	QuadExpr.remove()	700
19.2.39	PsdExpr Class	700
19.2.39.1	PsdExpr()	700
19.2.39.2	PsdExpr.setCoeff()	701
19.2.39.3	PsdExpr.getCoeff()	701
19.2.39.4	PsdExpr.getPsdVar()	701
19.2.39.5	PsdExpr.getLinExpr()	702
19.2.39.6	PsdExpr.getConstant()	702
19.2.39.7	PsdExpr.getValue()	702
19.2.39.8	PsdExpr.getSize()	703
19.2.39.9	PsdExpr.setConstant()	703
19.2.39.10	PsdExpr.addConstant()	703

19.2.39.11	<code>PsExpr.addTerm()</code>	704
19.2.39.12	<code>PsExpr.addTerms()</code>	704
19.2.39.13	<code>PsExpr.addLinExpr()</code>	704
19.2.39.14	<code>PsExpr.addPsExpr()</code>	705
19.2.39.15	<code>PsExpr.clone()</code>	705
19.2.39.16	<code>PsExpr.reserve()</code>	706
19.2.39.17	<code>PsExpr.remove()</code>	706
19.2.40	<code>CoptError</code> Class	706
19.3	Helper Functions and Utilities	707
19.3.1	Helper Functions	707
19.3.1.1	<code>multidict()</code>	707
19.3.1.2	<code>quicksum()</code>	707
19.3.2	<code>tuplelist</code> Class	708
19.3.2.1	<code>tuplelist()</code>	708
19.3.2.2	<code>tuplelist.add()</code>	708
19.3.2.3	<code>tuplelist.select()</code>	708
19.3.3	<code>tupledict</code> Class	709
19.3.3.1	<code>tupledict()</code>	709
19.3.3.2	<code>tupledict.select()</code>	709
19.3.3.3	<code>tupledict.sum()</code>	709
19.3.3.4	<code>tupledict.prod()</code>	710
19.3.4	<code>ProbBuffer</code> Class	710
19.3.4.1	<code>ProbBuffer()</code>	710
19.3.4.2	<code>ProbBuffer.getData()</code>	711
19.3.4.3	<code>ProbBuffer.getSize()</code>	711
19.3.4.4	<code>ProbBuffer.resize()</code>	711

# Chapter 1

## Introduction to Cardinal Optimizer

Cardinal Optimizer is a high-performance mathematical programming solver for efficiently solving large-scale optimization problem. This documentation provides basic introduction to the Cardinal Optimizer, including:

- *How to install Cardinal Optimizer*
- *How to setup license files*
- *How to use Cardinal Optimizer in interactive shell*

We suggest that all users to read the first two sections carefully before using the Cardinal Optimizer.

Once the installation and license setup are done, we recommend users who want to do a quick experiment on the Cardinal Optimizer to read the *COPT Interactive Shell* chapter for details. Users who already have preferred programming language can select from available Application Programming Interfaces (APIs), including:

- *C interface*
- *C++ interface*
- *C# interface*
- *Java interface*
- *Python interface*
- *AMPL interface*
- *Pyomo interface*
- *PuLP interface*
- *CVXPY interface*

### 1.1 Overview

Cardinal Optimizer supports solving Linear Programming (LP) problems, Second-Order-Cone Programming (SOCP) problems, Convex Quadratic Programming (QP) problems, Convex Quadratically Constrained Programming (QCP) problems, Semidefinite Programming problems (SDP) and Mixed Integer Programming (MIP) problems, which include Mixed Integer Linear Programming (MILP), Mixed Integer Second-Order-Cone Programming (MISOCP), Mixed Integer Convex Quadratic Programming (MIQP), Mixed Integer Convex Quadratically Constrained Programming (MIQCP).

We will support more problem types in the future. The supported problem types and available algorithms are summarized in [Table 1.1](#)

Table 1.1: Supported problem types and available algorithms

<b>Problem type</b>	<b>Available algorithms</b>
Linear Programming (LP)	Dual simplex; Barrier
Second-Order-Cone Programming (SOCP)	Barrier
Convex Quadratic Programming (QP)	Barrier
Convex Quadratically Constrained Programming (QCP)	Barrier
Semidefinite Programming (SDP)	Barrier; ADMM
Mixed Integer Linear Programming (MILP)	Branch-and-Cut
Mixed Integer Second-Order-Cone Programming (MISOCP)	Branch-and-Cut
Mixed Integer Convex Quadratic Programming (MIQP)	Branch-and-Cut
Mixed Integer Convex Quadratically Constrained Programming (MIQCP)	Branch-and-Cut

Cardinal Optimizer supports all major 64-bit operating systems including Windows, Linux (including ARM64 platform) and MacOS (including ARM64 platform), and currently provides programming interfaces shown below:

- C interface
- C++ interface
- C# interface
- Java interface
- Python interface
- AMPL interface
- Pyomo interface
- PuLP interface
- CVXPY interface
- GAMS interface
- Julia interface

We are going to develop more programming interfaces to suit various needs of users and situations.

## 1.2 Licenses

Now, we provides 4 types of license, which are Personal License, Server License, Floating License, and Cluster License. They are listed in table below (Table 1.2) :

Table 1.2: License Type

License Type	Detail
Personal License	It is tied to personal computers by username. Only approved user can run COPT on his devices. No limitations on CPU cores and threads.
Server License	It is tied to a single server computer by its hardware info (MAC and CPUID). An arbitrary number of users and programs can run COPT simultaneously. No limitations on CPU cores as well.
Floating License	It is tied to a server machine running COPT floating token service, by its hardware info (MAC and CPUID). Any COPT floating client connected to server can borrow and use the floating license, thus run one process for optimization jobs simultaneously. The token number is max number of clients who can use floating licenses simultaneously.
Cluster License	It is tied to a server machine running COPT compute cluster service, by its hardware info (MAC and CPUID). Any COPT compute cluster client connected to server can offload optimization computations. That is, clients are allowed to do modelling locally, execute optimization jobs remotely, and then obtain results interactively. Although server can have multiple clients connected, each connection must run optimization jobs sequentially. No limitations on CPU cores.

## 1.3 How to Cite

If you used COPT in your research work, please mention us in your publication. For example:

- We used COPT [1] in our project.
- To solve the integer problem, we used Cardinal Optimizer [1].

with the following entry in the Reference section:

```
[1] D. Ge, Q. Huangfu, Z. Wang, J. Wu and Y. Ye. Cardinal Optimizer (COPT) user guide. https://guide.coap.online/copt/en-doc, 2022.
```

The corresponding BiBTeX citation is:

```
@misc{copt,
  author={Dongdong Ge and Qi Huangfu and Zizhuo Wang and Jian Wu and Yinyu Ye},
  title={Cardinal {O}ptimizer {(COPT)} user guide},
  howpublished={\a href{https://guide.coap.online/copt/en-doc}{https://guide.coap.online/copt/en-doc}},
  year=2022
}
```

## 1.4 Contact Information

Cardinal Optimizer is developed by [Cardinal Operations](#), users who want any further help can contact us using information provided in [Table 1.3](#)

Table 1.3: Contact information

Type	Information	Description
Website	<a href="https://www.shanshu.ai/">https://www.shanshu.ai/</a>	
Phone	400-680-5680	
Email	<a href="mailto:coptsales@shanshu.ai">coptsales@shanshu.ai</a>	business support
Email	<a href="mailto:coptsupport@shanshu.ai">coptsupport@shanshu.ai</a>	technical support



## Chapter 2

# Installation Guide

This chapter introduces how to install **Cardinal Optimizer** on all supported operating systems, and how to obtain and setup license correctly. We recommend all users read this chapter carefully before using Cardinal Optimizer.

### 2.1 Registration

Before using Cardinal Optimizer, users need to register online and then install the COPT package on your machine. If this is not done yet, please visit official [COPT page](#) and fill the registration form following the guidelines.

The online registration is for personal license application. Specifically, users only need to provide username of machine, besides basic information.

Upon approval, you will receive a letter from [coptsales@shanshu.ai](mailto:coptsales@shanshu.ai). It gives both link to download COPT software package and a license key tied with registration information. You may refer to *Software Installation* below and *Setting Up License* for further steps.

For business users, COPT license requires additional hardware information, such as physical MAC address and CPUID. For your convenience, Shanshu owns a tool `coptmac`, which runs in terminal and prints related information. Below is an example.

To get hardware information of the binding computer, where COPT release version runs, execute the following command.

```
coptmac
```

Then you'll see information similar to below.

```
[ Info] Cardinal Optimizer COPT v6.0.0 20221010
[ Info] CPU Brand = Intel(R) Core(TM) i7-9750H CPU @ 2.60GHz
[ Info] CPU ID = BFEFBFF000706E7
[ Info] User Name = XXX
[ Info] Search Local MAC
[ Info] 40:2B:D3:88:44:33
[ Info] Found 1 Local MAC
[ Info] Done !!!
```

If you encounter any problems, please contact [coptsupport@shanshu.ai](mailto:coptsupport@shanshu.ai) for help.

## 2.2 Software Installation

### 2.2.1 Windows

We provide two types of installation packages for Windows operating systems, one is an executable installer for most of users and the other one is a zip-format archive specialized for expert users. We recommend users to download the executable installer.

If you download the executable installer for Windows from our website, e.g. CardinalOptimizer-6.0.0-win64-installer.exe for 64-bit version of COPT 6.0.0, just double-click it and follow the following guidance:

- Step 1: Click the installer and select the installation language. The default installation language is **English**, users can change it by select from the drop-down menu, see Fig. 2.1. Here we use the default setting.

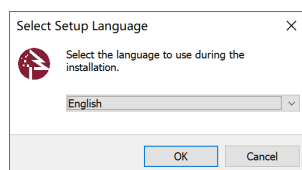


Fig. 2.1: Select installation language

- Step 2: If you agree with the 'End-User License Agreement (EULA)', just choose 'I accept the agreement' and then click 'Next'. The software won't install if you disagree with the EULA, see Fig. 2.2.

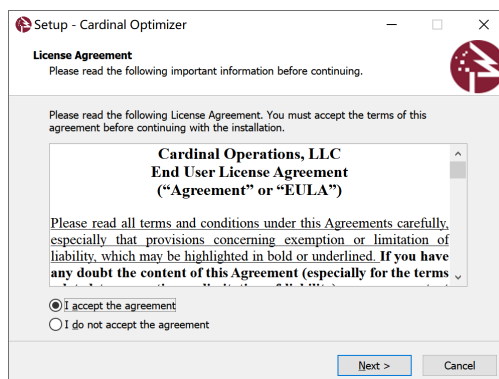


Fig. 2.2: License agreement page

- Step 3: By default, the installer will place all files into directory C:\Program Files\copt60, you may change it to any directories. If you have decided the install directory, just click 'Next', see Fig. 2.3.

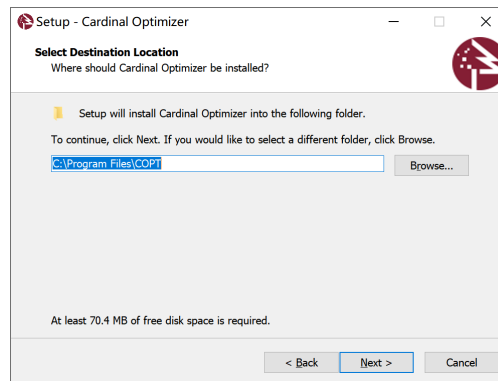


Fig. 2.3: Choose install directory

- Step 4: To select the start menu folder, you can simply use the default setting and click 'Next', see Fig. 2.4.

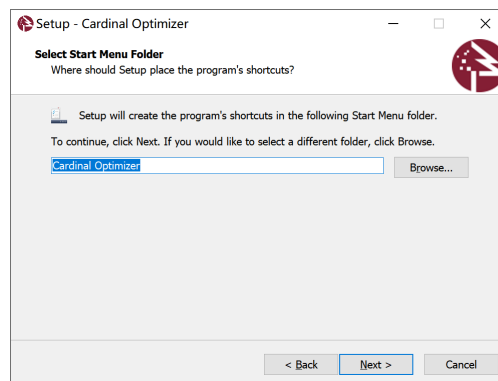


Fig. 2.4: Select start menu folder

- Step 5: By now, the software is ready to install, just click 'Install', see Fig. 2.5.

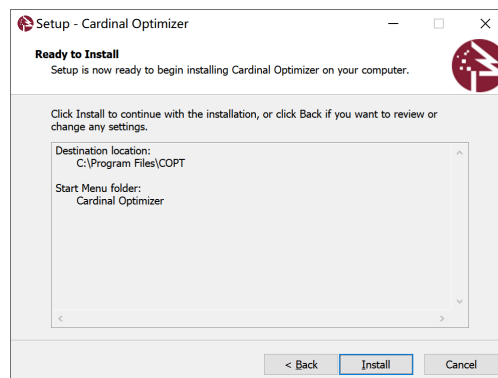


Fig. 2.5: Ready to install

- Step 6: When installation completed, the software requires restart of your machine since the installer has automatically made the required modifications to environment variables for you. Be sure to save your working files and close other running applications before restart, and then click 'Finish', see Fig. 2.6.



Fig. 2.6: Installation completed and restart your machine

If you downloaded the zip-format installer archive, just uncompress it to any directories with any unarchiver and set up environment variables as follows. Here we assumed the installation directory to be C:\Program Files\copt60:

- Step 1: Open Command Prompt (cmd) with **administrator privilege** and execute the following command to pop-up the environment variables setting panel.

```
rundll32 sysdm.cpl,EditEnvironmentVariables
```

- Step 2: Add directory C:\Program Files\copt60\bin to system environment variable **PATH**.
- Step 3: Create a new system environment variable named **COPT\_HOME**, whose value is C:\Program Files\copt60.
- Step 4: Create a new system environment variable named **COPT\_LICENSE\_DIR**, whose value is C:\Program Files\copt60.

Up to now, you have already setup the required modifications to the environment variables. If you accept the `copt-eula_en.pdf` in installation directory, then please go to [Setting Up License](#) for license issues.

## 2.2.2 Linux

For Linux platform, we provide gzip-format archive only, if you download the software from our website, e.g. `CardinalOptimizer-6.0.0-lnx64.tar.gz` for 64-bit version of COPT 6.0.0, just type commands below in shell to extract it to any directories:

```
tar -xzf CardinalOptimizer-6.0.0-lnx64.tar.gz
```

You will get a folder named `copt60` in current directory, you can move it to any other directories as you like. We recommend users move it to `/opt` directory by typing commands below in shell:

```
sudo mv copt60 /opt/
```

Note that the above command requires **root privilege** to execute.

The next step users need to do is to set the required environment variables, by adding the following commands to the `.bashrc` file in your `$HOME` directory using any editors that you preferred:

```
export COPT_HOME=/opt/copt60
export COPT_LICENSE_DIR=/opt/copt60
export PATH=$COPT_HOME/bin:$PATH
export LD_LIBRARY_PATH=$COPT_HOME/lib:$LD_LIBRARY_PATH
```

Remember to save your modifications to the `.bashrc` file, and open a new terminal to check if it works by executing commands below respectively:

```
echo $COPT_HOME
echo $COPT_LICENSE_DIR

echo $PATH
echo $LD_LIBRARY_PATH
```

If you accept the `copt-eula_en.pdf` in installation directory, then please go to [Setting Up License](#) for license issues.

### 2.2.3 MacOS

We provide two types of installation packages for MacOS, one is a DMG-format installer for most of users and the other is a gzip-format archive for expert users. We recommend users to download the DMG-format installer.

If you download the DMG-format installer for MacOS from our website, e.g. `CardinalOptimizer-6.0.0-osx64.dmg` for 64-bit version of COPT 6.0.0, please follow the following guidance to install the software:

- Step 1: Double-click the DMG-format installer, waiting for the OS to mount the DMG installer automatically.
- Step 2: Simply drag the `copt60` folder into 'Applications' folder, see [Fig. 2.7](#):



Fig. 2.7: Drag `copt60` into 'Applications'

If you download the gzip-format installer archive, just uncompress it to any directories with commands:

```
tar -xzf CardinalOptimizer-6.0.0-osx64.tar.gz
```

You will get a folder named `copt60` in current directory, you can move it to any other directories as you want. We recommend users move it to the 'Applications' folder by executing commands below:

```
mv copt60 /Applications/
```

The next step for both DMG-format and gzip-format installer is to setup the environment variables by adding the following commands to the `'.bash_profile'` file in your `$HOME` directory using any editors that you preferred:

```
export COPT_HOME=/Applications/copt60
export COPT_LICENSE_DIR=/Applications/copt60
export PATH=$COPT_HOME/bin:$PATH
export DYLD_LIBRARY_PATH=$COPT_HOME/lib:$DYLD_LIBRARY_PATH
```

Remember to save your modifications to the `'.bash_profile'` file, if it does not exist, you can create at your own by executing:

```
touch ~/.bash_profile
```

If your terminal is `zsh`, you should add the following line to `'.zshrc'` file in `$HOME` directory as well:

```
source ~/.bash_profile
```

Now open a new terminal to check if the previous modifications work by executing commands below respectively:

```
echo $COPT_HOME
echo $COPT_LICENSE_DIR

echo $PATH
echo $DYLD_LIBRARY_PATH
```

If you accept the `copt-eula_en.pdf` in installation directory, then please go to [Setting Up License](#) for license issues.

For MacOS 10.15 (Catalina), if users received error message below:

```
"libcopt.dylib" cannot be opened because the developer cannot be verified.
macOS cannot verify that this app is free from malware.
```

or

```
"libcopt_cpp.dylib": dlopen(libcopt_cpp.dylib,6): no suitable image found.
Did find: libcopt_cpp.dylib: code signature in (libcopt_cpp.dylib) not valid
for use in process using Library Validation: library load disallowed by
system policy.
```

Then execute the following commands:

```
xattr -d com.apple.quarantine CardinalOptimizer-6.0.0-osx64.dmg
xattr -d com.apple.quarantine CardinalOptimizer-6.0.0-osx64.tar.gz
```

or

```
xattr -dr com.apple.quarantine /Applications/copt60
```

to disable security check of MacOS.

## 2.3 Setting Up License

The Cardinal Optimizers requires a valid license to work properly. We offer different types of licenses most suitable for user's needs. All users should read this section carefully. If you encounter any problem about license, feel free to contact [coptsupport@shanshu.ai](mailto:coptsupport@shanshu.ai).

Once the registration is done, a license key is sent to users. It is a unique token binding with user's registration information. Afterwards, users may run the `copt_licgen` tool, shipped with Cardinal Optimizer, to obtain license files from COPT licensing server.

The following notes show you how to play with the `copt_licgen` tool.

### 2.3.1 Obtaining License

Firstly, please open a terminal and change directory to the installation directory of COPT, i.e. the path which pointed to by the environmental variable `COPT_HOME`. For Windows, the default installation directory is: `"C:\Program Files\COPT"`, so that users should change to this directory, and open the terminal with "administration privilege".

To obtain COPT license files, execute the following command using the option `'-key'` and the license key as argument. Below is an example, assuming the license key is `'19200817f147gd9f60abc791def047fb'`:

```
copt_licgen -key 19200817f147gd9f60abc791def047fb
```

If the license key is saved to `key.txt` file in format of 'KEY=xxx', which reside in the same place as `copt_licgen`, execute the following command using the option '-file' and 'key.txt' as argument.

```
copt_licgen -file key.txt
```

### 2.3.2 Verifying License

If the license key binding to registration information is verified by COPT license server, two license files, `license.dat` and `license.key`, are downloaded to the current working directory. To double check two license files are valid in current version of COPT, execute the following command with the option '-v'. Note that this command requires both `license.dat` and `license.key` existing in the current working directory.

```
copt_licgen -v
```

Users do not need to have internet connection to run COPT. However, obtaining license itself requires internet connection. If you encounter any problem when acquiring license files, please contact us. On the other hand, if you see log information similar to the following, you have obtained and verified license files successfully.

```
copt_licgen -key 19200817f147gd9f60abc791def047fb
[Info] Cardinal Optimizer   COPT v6.0.0 20221010
[Info] Use specific key 19200817f147gd9f60abc791def047fb
[Info] * get new COPT license from licensing server *
[Info] Write to license.dat
[Info] Write to license.key
[Info] Received new license files from server
[Info] Done !!!
```

and

```
copt_licgen -v
[Info] Cardinal Optimizer   COPT v6.0.0 20221010
[Info] Run local validation
[Info] Read license.dat
[Info] Read license.key
[Info] Expiry : Tue 2030-12-31 00:00:00 +0800
[Info] Local validation result: Succeeded
[Info] Done !!!
```

### 2.3.3 Installing License

Once you obtained the `license.dat` and `license.key` files from COPT license server and verified they work as expected, setting up them is just as simple as moving them to the same directory as the COPT dynamic library or *COPT Command-Line*. Note this installation is applied only to current COPT. The following two ways of installation applied to all versions of COPT on your machine.

The simplest way to install COPT license is to create a folder of `copt` in your HOME directory. For instance, your HOME directory looks like "C:\Users\your username\" on Windows and "/home/your username/" on Linux or MacOS. Then move license files to "C:\Users\your username\copt\" or "/home/your username/copt/". Note here folder name "copt" is case sensitive.

Alternatively, for users who prefer having license in a customized folder, set environment variable `COPT_LICENSE_DIR` to the customized folder. You may refer to *Software Installation* for how to set environment variable on Windows, Linux and MacOS.

In addition, please double check that if license files `license.dat` and `license.key` locate in path specified by environmental variable `COPT_LICENSE_DIR`.



### 2.3.4 Others

Basically, each type of licenses includes two license files: `license.dat` and `license.key`, each of which has digital signature to protect its content. When invoking COPT command-line or loading COPT dynamic library to solve an optimization problem, the public RSA key stored in '`license.key`' is used to verify signature in '`license.dat`'.

Afterwards, license data in format of key-value pair is parsed to verify whether it is a legal license. Below is a sample of license data.

```
## SHANSHU LICENSE FILE ##
```

```
USER = Trial User  
MAC = 44:05:99:31:41:C2  
CPUID = BFEFBFF000706E5  
EXPIRY = 2030-12-31  
VERSION = 6.0.0  
NOTE = Free For Trial
```

## Chapter 3

# COPT Command-Line

The **Cardinal Optimizer** ships with `copt_cmd` executable on all supported platforms, which let users solve optimization models in an interactive way. Before running COPT command-line, please make sure that you have valid license installed.

### 3.1 Overview

COPT command-line is a COPT API interpreter that executes commands read from the standard input or from a script file. COPT command-line interprets the following options when it is invoked:

- **-c**: If the '**-c**' option is present, it reads from an inline scripts, which is a quoted string and specified by the second argument.
- **-i**: If the '**-i**' option is present, it reads from an input script file, whose path is specified by the second argument.
- **-o**: If the '**-o**' option is present, it reads from standard input, while each **valid** command line is written to an output script file, whose path is specified by the second argument.

Regardless of arguments, the tool is interactive. Besides wrapping COPT API calls, it offers various features to help users move cursor around and edit lines. We try to provide as much user experience as standard command prompt (Windows console and Unix terminal).

### 3.2 Edit mode

This tool defines a number of commands to position the cursor, edit lines with combination keys on a standard keyboard. The following notes show you how to use the most important ones.

- **Basic commands**

1. **<Insert>**: Toggle between inserting characters and replacing the existing ones.
2. **<Esc>**: Discard inputs and move the cursor to the beginning of line. Press **<ESC>** twice on Linux/Mac platform to do the same thing.

- **Moving around**

1. **<Home>/<End>**: Jump to the beginning/end of line.
2. **<Left>/<Right>** Arrow: Move the cursor one character to the left/right.
3. **<CTRL>+<Left>/<Right>** Arrow: Move the cursor one word to the left/right.

- **Cut and Paste**

An internal paste buffer is available for the following cut operations.

1. <Delete>: Cut the character under the cursor.
2. <Backspace>: Cut the character before the cursor.
3. <CTRL>+<H>: Cut from the cursor to the beginning of line.
4. <CTRL>+<E>: Cut from the cursor to the end of line.
5. <CTRL>+<Y>: Paste text in paste buffer at the cursor position.

Each of cut operations defines cut direction: cut forward or cut backward. Obviously, <Delete> and <CTRL>+<E> cut forward; <Backspace> and <CTRL>+<H> cut backward. When two consecutive cut operations have the same cut direction, the cutting text is appended the paste buffer. Otherwise, the paste buffer is overwritten by the latest chopped text.

- **Command history**

1. <Up>/<Down>: Move through the history of command lines in the older/newer direction. The tool remembers the history entry if the last executed line is in history.
2. <CTRL>+<R> or <F8>: If you know what a previously executed line starts with, and you want to run it again, type prefix characters and then press <CTRL>+<R>, or <F8> on Windows platform, to iterate through the history of commands with matching prefix.

- **Tab completion**

Use <Tab> to complete shell commands, COPT parameters/attributes, or files under specified path. To cycle through multiple matches, just repeat pressing <Tab>.

1. If the cursor is over or right after the first word on the current command line, press <Tab> to complete available shell commands with matching prefix (from the cursor to the first character of word).
2. Otherwise, press <Tab> to complete COPT parameters/attributes, or file names under path with matching prefix. Specifically, if the prefix matches with COPT parameters as well as file under current working directory, only COPT parameters will be listed. In this case, to iterate file names, add relative path './' to start with.
3. For convenience, tab completion ignores case and support asterisk (\*) as wildcard to match file and directory pattern.
4. <Shift>+<Tab>: Complete the next one in an opposite direction.

## 3.3 Script mode

There are two approaches to run scripts, a batch of commands, in COPT command-line. One is to save scripts as a text file. The other is called **inline scripts**, that is, a quoted string of commands separated by ';'. Both of them can be loaded when COPT command-line is invoked, or loaded on fly in the edit mode (see shell command 'load'). Below describes more details about loading scripts as arguments.

This tool allows users to load a script file to do a batch job automatically. As mentioned in [Overview](#), a script file is read when its file path is specified as arguments of the option '-i'.

- When reading a script file, COPT command-line double checks whether the first non-blank line starts with special text: '#COPT script file'. This is to make sure users do not load an invalid script file by mistake. Indeed, only '#COPT' is verified. In addition, any line in scripts is commented out if its first non-blank character is '#'.
- After a script file is loaded, the tool keeps reading it as standard inputs, until reaching end of file or a special character '?'. Here, we use question mark '?' to pause scripts on purpose. To continue, users can type 'load' in command line. Afterwards, the tool picks whatever left in scripts and start to run from there, until reaching end of file or another question mark '?'. Once current scripts finish, users can load any other script file on fly.

It also allows users to load special scripts, called **inline scripts**. The only difference from a script file is that commands are separated by ';', instead of '\n'. So inline scripts can be read by using arguments of the option '-c', or loaded on fly by specifying a quoted string, and special character '?' works in the same way.

In addition, this tool provides a feature of recording **valid** command lines sequentially to a script file, if users specify an output script file as argument of the option '-o'. Here, **valid** command must use known shell commands and do not exceed number of allowed parameters.

In particular, if users load a script file or inline scripts on fly, all commands in scripts are written to the output script file. Note that command 'load' itself is not written to output script file on purpose. Because we've expanded and written all commands in scripts. On the other hand, it may trigger infinity loop if the script file loaded is actually itself.

## 3.4 Shell commands

COPT command-line supports the following shell commands for users to manipulate optimization models. Moreover, shell commands are case-insensitive and support tab-completion.

### 3.4.1 General shell commands

The shell commands below are in support of interactions.

- **cd**: This shell command works similar to DOS command 'cd'. That is, it changes **current working directory**, if its argument is valid relative or absolute path of a directory. Note that **current working directory** is the base directory for relative path and tab completion. It is initialized to current binary folder where `copt_cmd` exist. Users can change it by shell command 'cd <dirpath>'. For example, if users change working directory to a folder having mps files, reading model becomes much easier because only filename is needed.
- **dir/ls**: This shell command works similar to DOS command 'dir' or Bash command 'ls'. That is, it lists all files and directories under given relative or absolute path. To see files under current working directory, type 'dir' or 'ls'; To see files under parent folder, type 'dir ../'; To see files under home path, type 'dir ~/', etc. In addition, wildcard (\*) is supported as well. That is, 'dir net' lists all file names starting with 'net' under current working directory; 'dir /home/user/\*.gz' lists all files of type of '.gz' under path of '/home/user/'.
- **exit/quit**: Leave COPT command-line.
- **help**: It provides information on all shell commands. Typing 'help' followed by a shell command name gives you more details on shell commands. In particular, typing 'help' without arguments lists all shell commands with short descriptions. Right after overview of shell commands, the text 'help' with additional whitespace appear in the new prompt line. So users can directly type, or possibly <Tab> complete, actual shell command to read more details.
- **load**: Load a script file or inline scripts on fly and then execute a batch of commands. The syntax of 'load' command should be followed by either relative/absolute path of a script file, or quoted string of inline scripts. One special scenario is when current script is paused, that is, hit question mark ('?') during execution. In this case, type 'load' will continue the paused scripts. If users forgot having scripts in progress and try to load another scripts, it works as command 'load' and any additional argument is ignored. This behavior is back to normal after reaching the end of current scripts.
- **pwd**: This shell command works similar to Bash command 'pwd'. That is, display current working directory to let users know where they are.
- **status**: COPT command-line has a state machine on status of problem solving (see Fig. 3.1). This is used to guide users through steps. Typing 'status' shows you current interactive status. The status exposed to users are as follows:
  - **Initial**, initial status, either right after the tool is invoked, or shell command **reset** is called.

- **Read**, read an optimization model in format of mps successfully.
- **SetParam**, set value of any COPT parameter successfully.
- **Optimize**, shell command **opt** is called to solve current optimization model.

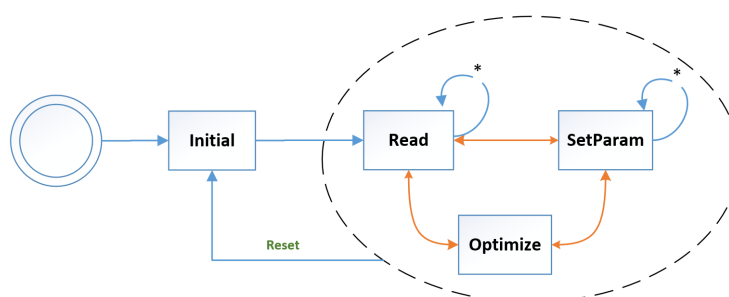


Fig. 3.1: Status of COPT command-line

### 3.4.2 COPT shell commands

The shell commands below are related to COPT API calls.

- **display/get**: Display current setting of any COPT parameter or attribute. Typing 'display' followed by COPT parameter or attribute name shows its current value. Typing 'display' only lists all COPT parameters and attributes with short descriptions. Right after overview of COPT parameters/attributes, the text 'display' with additional whitespace appear in the new prompt line. So users can directly type, or possibly <Tab> complete, actual parameter/attribute name to see its current value.
- **opt/optimize**: Solve optimization model and display results on screen. This command requires no parameter and its interactive status is set to 'Optimize'.
- **optlp/optimizelp**: Solve optimization model as LP model. This command requires no parameter and its interactive status is set to 'Optimize'.
- **iis**: Compute IIS for loaded model.
- **feasrelax**: Do feasible relaxation for infeasible problem. Note that an optimization problem must exist before calling 'feasrelax'. 'feasrelax' or 'feasrelax all' means to relax all bounds of variables and constraints with penalty 1, while 'feasrelax vars' means to only relax bounds of variables with penalty 1, and 'feasrelax cons' means to only relax bounds of constraints with penalty 1.
- **tune**: Tuning parameter automatically of the read-in model.
- **loadtuneparam**: Loads the specified tuning results into the currently read-in model. The calling command is 'loadtuneparam idx', where 'idx' is the specified tuning result's number. Use the command 'get TuneResults' to get the number of tuning results obtained after the current tuning.
- **read**: Read optimization model, MIP solution, LP basis, MIP initial solution and COPT parameters from file under given relative/absolute path. It supports files including optimization problem file of type '.mps' and compressed format '.mps.gz', problem file of type '.lp' and compressed format '.lp.gz', problem file of type '.dat-s' and compressed format '.dat-s.gz', problem file of type '.cbf' and compressed format '.cbf.gz', problem file of type '.bin' and compressed format '.bin.gz', basis file of type '.bas', solution file of type '.sol', MIP initial solution file of type '.mst', parameter file of type '.par' and tuning file of type '.tune'.
- **readmps**: Read optimization model in format of '.mps' or '.mps.gz' from file. Note this command does not require file type '.mps' or '.mps.gz'. That is, it is fine to have content in format of MPS, regardless of its file name. In addition, the interactive status is set to 'Read'.

- **readlp**: Read optimization model in format of `'.lp'` or `'.lp.gz'` from file. Note this command does not require file type `'.lp'` or `'.lp.gz'`. That is, it is fine to have content in format of LP, regardless of its file name. In addition, the interactive status is set to `'Read'`.
- **readsdp**: Read an optimization problem in format of `'.dat-s'` or `'.dat-s.gz'` from file. Note that this command is similar to `'read'` when the file type is `'.dat-s'`. However, `'readsdp'` does not require the file has type `'.dat-s'`. It parses the file as SDPA format, no matter what file type it is.
- **readcbf**: Read an optimization problem in format of `'.cbf'` or `'.cbf.gz'` from a file. Note that this command is similar to `'read'` when the file type is `'.cbf'`. However, `'readcbf'` does not require the file has type `'.cbf'`. It parses the file as CBF format, no matter what file type it is.
- **readbin**: Read optimization model in format of `'.bin'` or `'.bin.gz'` from file. Note this command does not require file type `'.bin'`. That is, it is fine to have content in format of COPT binary format, regardless of its file name. In addition, the interactive status is set to `'Read'`.
- **readsol**: Read MIP solution from file. Note this command does not require file type of `'.sol'`. That is, it is fine to have content of solution, regardless of its file name.
- **readbasis**: Read optimal basis from file. Note this command does not require file type of `'.bas'`. That is, it is fine to have content of basis, regardless of its file name.
- **readmst**: Read MIP initial solution from file. Note this command does not require file type of `'.mst'`. That is, it is fine to have content of solution, regardless of its file name.
- **readparam**: Read COPT parameters from file and set corresponding values. Note this command does not require file type of `'.par'`. That is, it is fine to have content of COPT parameters, regardless of its file name.
- **readtune**: Read the parameter file under the given relative or absolute path. Note this command does not require file type of `'.tune'`. That is, it is fine that the file conforms to the COPT parameter tuning file format, regardless of its file name.
- **reset**: Reset current optimization model and all parameters/attributes to defaults. In addition, the interactive status is set to `'Initial'`.
- **set**: Set value of any COPT parameter. The syntax of this command should be `'set'`, followed by COPT parameter name and an integer/double number. Moreover, Typing `'set'` only lists all COPT parameters with short descriptions. Right after overview of COPT parameters, the text `'set'` with additional whitespace appears in the new prompt line. So users can directly type, or possibly <Tab> complete, actual parameter name to complete as partial command. If so, its current value, default value, min value, max value of given COPT parameter are displayed on screen. Now users know how to add correct value to complete the full command of `'set'`. One tip of saving typing here is to get last history entry by pressing <Up>. At last, the interactive status is set to `'SetParam'`.
- **write**: Output MPS/LP/CBF format model, COPT binary format model, IIS model, FeasRelax model, LP/MIP solution, optimal basis, settings of modified COPT parameters to file under given relative/absolute path. This command detects file types. For an instance, `'write diet.sol'` outputs LP solution to file `'diet.sol'`. An error message will be shown to users if file type do not match. Supported file types are: `'.mps'`, `'.lp'`, `'.bin'`, `'.cbf'`, `'.iis'`, `'.relax'`, `'.sol'`, `'.bas'`, `'.mst'` and `'.par'`.
- **writemp**: Output current optimization model to a file of type `'.mps'`. Note `'.mps'` is appended to the file name, if users do not add it.
- **writelp**: Output current optimization model to a file of type `'.lp'`. Note `'.lp'` is appended to the file name, if users do not add it.
- **writecbf**: Output problem to a file of type `'.cbf'`. Note `'.cbf'` is appended to the file name, if users do not add it.
- **writebin**: Output current optimization model to a file of type `'.bin'`. Note `'.bin'` is appended to the file name, if users do not add it.

- **writeiis**: Output computed IIS model to a file of type `'.iis'`. Note `'.iis'` is appended to the file name, if users do not add it.
- **writerelax**: Output feasibility relaxation problem to a file of type `'.relax'`. Note `'.relax'` is appended to the file name, if users do not add it.
- **writesol**: Output LP solution of problem to a file of type `'.sol'`. Note `'.sol'` is appended to the file name, if users do not add it.
- **writepoolsol**: For the current problem, save the solution with the specified number in the solution pool to the result file under the given relative or absolute path. If the file extension is not `''sol''`, the suffix `'.sol'` is automatically added. The calling command is `'writepoolsol idx pool_idx.sol'`, where `'idx'` is the specified solution number in solution pool. Use the command `'get PoolSols'` to get the current number of solution pool results.
- **writebasis**: Output optimal basis to a file of type `'.bas'`. Note `'.bas'` is appended to the file name, if users do not add it.
- **writemst**: Output current best MIP solution to a file of type `'.mst'`. Note `'.mst'` is appended to the file name, if users do not add it.
- **writeparam**: Output modified COPT parameters to a file of type `'.par'`. Note `'.par'` is appended to the file name, if users do not add it.
- **writetuneparam**: Save the specified tuning result to the parameter setting file under the given relative or absolute path. The calling command is `'writetuneparam idx tune_idx.par'`, where `'idx'` is the specified tuning result number. Use the command `'get TuneResults'` to get the number of tuning results obtained after the current tuning.

## 3.5 Example Usage

This section shows how to use COPT command-line to interactively solve a well-known problem, called “Diet Problem”. Please refer to [AMPL Interface - Example Usage](#) for problem description in more detail.

With valid license, COPT command-line should run as follows, after entering `copt_cmd` in command prompt.

```
copt_cmd
```

If users are new to COPT command-line, always start with shell command `'help'`.

Cardinal Optimizer v6.0.0. Build date Oct 10 2022

Copyright Cardinal Operations 2022. All Rights Reserved

COPT>

Suppose diet model has mps format and exits in the current working directory. In this way, we just type its file name to read, without worrying about its path.

```
COPT> read diet.mps
Reading from '/home/username/copt/diet.mps'
Reading finished (0.00s)
```

Before solving it, users are free to tune any COPT parameter. Below is an example to set value of double parameter `TimeLimit` to 10s.

If users are not familiar with COPT parameters, just type `'set'` to list all public COPT parameters and attributes with short description. Furthermore, `'set'` with parameter name, for example `'set TimeLimit'`, displays its current value, default value, min value and max value of the given parameter.

```
COPT> set timelimit 10

Setting parameter 'TimeLimit' to 10
```



After tuning parameters, it is time to solve the model. The messages during problem solving are shown as follows.

```
COPT> opt
Model fingerprint: 129c032d

Hardware has 4 cores and 8 threads. Using instruction set X86_NATIVE (1)
Minimizing an LP problem

The original problem has:
    4 rows, 8 columns and 31 non-zero elements
The presolved problem has:
    4 rows, 8 columns and 31 non-zero elements

Starting the simplex solver using up to 8 threads
```

Method	Iteration	Objective	Primal.NInf	Dual.NInf	Time
Dual	0	0.0000000000e+00	4	0	0.01s
Dual	1	8.8201991646e+01	0	0	0.01s
Postsolving					
Dual	1	8.8200000000e+01	0	0	0.01s

```
Solving finished
Status: Optimal Objective: 8.8200000000e+01 Iterations: 1 Time: 0.01s
```

After solving the model, users might check results by using shell command 'get' with a parameter name. Note that, similar to 'set', type 'get' to list all public parameters and attributes. In particular, 'get all' shows all parameters/attributes and their current value.

```
COPT> get TimeLimit
    DblParam: [Current] 10s
COPT> get LpObjval
    DblAttr: [Current] 88.2
COPT> get LpStatus
    IntAttr: [Current] 1 optimal
```

Before leaving COPT command-line, users might output the model in format of mps, optimal basis, modified parameters, or LP solution to files. Below is an example to write LP solution to current directory.

```
COPT> writesol diet
    Writing solutions to /home/username/copt/diet.sol
COPT> quit
    Leaving COPT...
```

Below is the script file `diet.in` by putting everything together, see [Listing 3.1](#):

Listing 3.1: `diet.in`

```
1 #COPT script-in file
2
3 read diet.mps
4 set timelimit 10
5 opt
6 writesol diet
7 quit
```

which is loaded by using the option '-i' when starting `copt_cmd`:

```
copt_cmd -i diet.in
```

or executing shell command `load` on fly.

```
COPT> load diet.in
```

## Chapter 4

# COPT Floating Licensing service

The **Cardinal Optimizer** provides COPT Floating Token Server on all supported platforms, who serve license tokens to COPT client applications over local network.

Once you have floating license properly installed, server owns a set of license tokens up to number described in the license file. Any properly configured COPT client of the same version can request a token from server and release it whenever quit.

### 4.1 Server Setup

The application of COPT Floating Token server includes `copt_flserver` executable and a configuration file `fls.ini`. The very first thing to do when server starts is to verify floating license locally, whose location is specified in `fls.ini`. If local validation passes, server connects to remote COPT licensing server for further validation, including machine IP, which is supposed to match IP range that user provided during registration. This means the machine running COPT Floating Token Server should have internet access in specified area. For details, please see descriptions below or refer to *How to obtain and setup license*.

#### 4.1.1 Installation

The **Cardinal Optimizer** provides a separate package for remote services, which include COPT floating token server. Users may apply for remote package from customer service. Afterwards, unzip the remote package and move to any folder on your computer. The software is portable and does not change anything in the system it runs on. Below are details of installation.

##### Windows

Please unzip the remote package and move to any folder. Though, it is common to move to folder under `C:\Program Files`.

##### Linux

To unzip the remote package, enter the following command in terminal:

```
tar -xzf CardinalOptimizer-Remote-6.0.0-lnx64.tar.gz
```

Then, the following command moves folder `copt_remote60` in current directory to other path. For an example, admin user may move it to folder under `/opt` and standard user may move it to `$HOME`.

```
sudo mv copt_remote60 /opt
```

Note that it requires `root` privilege to execute this command.

##### MacOS

To unzip the remote package, enter the following command in terminal:

```
tar -xzf CardinalOptimizer-Remote-6.0.0-osx64.tar.gz
```

Then, the following command moves folder `copt_remote60` in current directory to other path. For an example, admin user may move it to folder under `/Applications` and standard user may move it to `$HOME`.

```
mv copt_remote60 /Applications
```

### 4.1.2 Floating License

After installing COPT remote package, it requires floating license to run. It is preferred to save floating license files, `license.dat` and `license.key`, to `floating` folder in path of remote package.

#### Windows

If the COPT remote package is installed under "`C:\Program Files`", execute the following command to enter `floating` folder in path of remote package.

```
cd "C:\Program Files\copt_remote60\floating"
```

Note that the tool `copt_licgen` creating license files exists under `tools` folder in path of remote package. The following command creates floating license files in current directory, given a floating license key, such as `7483dff0863ffdae9fff697d3573e8bc`.

```
..\tools\copt_licgen -key 7483dff0863ffdae9fff697d3573e8bc
```

#### Linux and MacOS

If the COPT remote package is installed under `/Applications`, execute the following command to enter `floating` folder in path of remote package on MacOS system.

```
cd /Applications/copt_remote60/floating
```

The following command creates floating license files in current directory, given a floating license key, such as `7483dff0863ffdae9fff697d3573e8bc`.

```
../tools/copt_licgen -key 7483dff0863ffdae9fff697d3573e8bc
```

In addition, if users run the above command when current directory is different than `floating` folder in path of remote package, it is preferred to move them to `floating`. The following command does so.

```
mv license.* /Application/copt_remote60/floating
```

### 4.1.3 Configuration

Below is a typical configuration file, `fls.ini`, of COPT Floating Token Server.

```
[Main]
Port=7979

[Licensing]
# if empty or default license name, it is from binary folder
# to get license files from cwd, add prefix "./"
# full path is supported as well
LicenseFile = license.dat
PubkeyFile = license.key

[Filter]
# default policy 0 indicates accepting all connections, except for ones in blacklist
# otherwise, denying all connections except for ones in whitelist
DefaultPolicy = 0
UseBlackList = true
```

(continues on next page)

(continued from previous page)

```
UseWhiteList = true
FilterListFile = flsfilters.ini
```

The **Main** section specifies port number, through which COPT clients connect to server and then obtain the license token. The **Licensing** section specifies location of floating license. As described in comments above, if empty string or default license file name is specified, floating license files are read from the binary folder where the server executable reside.

It is possible to run COPT Floating Token server, even if floating license files do not exist in the same folder as the server executive. One solution is to set **Licensing** = `./license.dat` and **PubkeyFile** = `./license.key`. By doing so, server read floating license from the current working directory. That is, user could execute server application at the path where floating license files exist.

The other solution is to set full path of license files in configuration. As mentioned before, Cardinal Optimizer allows users to set environment variable **COPT\_LICENSE\_DIR** for license files. For details, please refer to *How to install Cardinal Optimizer*. If user prefers the way of environment variable, the configuration file should have the full path to floating license.

In the **Filter** section, **DefaultPolicy** has default value 0, meaning all connections are accepted except for those in black lists; if it is set to non-zero value, then all connection are blocked except for those in white lists. In addition, black list is enabled if **UseBlackList** is true and white list is enabled if **UseWhiteList** is true. The filter configuration file is specified by **FilterListFile**. Below is an example of the filter configuration file.

```
[BlackList]
# 127.0.*.* + user@machine*

[WhiteList]
# 127.0.1.2/16 - user@machine*

[ToolList]
# only tool client at server side can access by default
127.0.0.1/32
```

It has three sections and each section has its own rules. In section of **BlackList**, one may add rules to block others from connection. In section of **WhiteList**, one may add rules to grant others for connection, even if the default policy is to block all connections. Only users listed in section of **ToolList** are able to connect to floating token server by Floating Token Server Managing Tool (see below for details).

Specifically, rules in filter configuration have format of starting with IP address. To specify IP range, you may include wildcard (\*) in IP address, or use CIDR notation, that is, a IPv4 address and its associated network prefix. In addition, a rule may include (+) or exclude (-) given user at given machine, such as `127.0.1.2/16 - user@machine`. Here, **user** refers to **username**, which can be queried by **whoami** on Linux/MacOS platform; **machine** refers to **computer name**, which can be queried by **hostname** on Linux/MacOS platform.

#### 4.1.4 Example Usage

Suppose that floating license exists in the same folder where the server executable reside. To start the COPT Floating Token Server, just execute the following command at any directory in Windows console, or Linux/Mac terminal.

```
copt_flserver
```

If you see log information as follows, the Floating Token Server has been successfully started. Server monitors any connction from COPT clients, manages approved clients as well as requests in queue. User can stop Floating Token Server anytime when entering **q** or **Q**.

```
> copt_flserver
[ Info] Floating Token Server, COPT v6.0.0 20221010
```

```
[ Info] server started at port 7979
```

If failed to verify local floating license, or something is wrong on remote COPT license server, you might see error logs as follows.

```
> copt_flserver
[ Info] Floating Token Server, COPT v6.0.0 20221010
[Error] Invalid signature in public key file
[Error] Fail to verify local license
```

and

```
> copt_flserver
[ Info] Floating Token Server, COPT v6.0.0 20221010
[Error] Error to connect license server
[Error] Fail to verify floating license by server
```

## 4.2 Client Setup

COPT Clients can be COPT command-line tool, or any application which solve problems using COPT api, such as COPT python interface. Floating licensing is a better approach in terms of flexibility and efficiency. Different from stand-alone license, any machine having properly configured COPT client can legally run Cardinal Optimizer, as long as peak number of connected clients does not exceed the token number.

### 4.2.1 Configuration

Before running COPT as floating client, please make sure that you have installed COPT locally. For details, please refer to [How to install Cardinal Optimizer](#). Users can skip obtaining local licenses by adding a floating configuration file `client.ini`.

Below is a typical configuration file, `client.ini`, of COPT floating clients.

```
Host = 192.168.1.11
Port = 7979
QueueTime = 600
```

As configured above, COPT floating client tries to connect to 192.168.1.11 at port 7979 with wait time in queue up to 600 seconds. Here, `Host` is set to `localhost` if empty or not specified; `QueueTime` is set to 0 if empty or not specified. Specifically, empty `QueueTime` means client does not wait and should quit immediately, if COPT Floating Token Server have no tokens available. Port number must be great than zero and should be the same as that specified in server configuration file. Note that keywords in the client configuration file are case insensitive.

Without local license files, a COPT application still works if client configuration file, `client.ini`, exists in one of the following three locations in order, that is, current working directory, environment directory by `COPT_LICENSE_DIR` and binary directory where COPT executable is located.

By design, COPT application reads local license files instead of client configuration file, if they both exist in the same location. On the other hand, if local license files are under the environment directory, to activate approach of floating licensing, user can simply add a configuration file, `client.ini`, under the current working directory (different from the environment directory).

If a COPT application calls COPT api to solve problems, such as COPT python interface, license is checked as soon as COPT environment object is created. If there exists proper client configuration file, `client.ini`, a license token is granted to COPT client. This license token is released and sent back to token server, as soon as last COPT environment object in the same process destroys.

### 4.2.2 Example Usage

Suppose that we've set client configuration file `client.ini` properly and have no local license, below is an example of obtaining a floating token by COPT command-line tool `copt_cmd`. Execute the following command in Windows console, or Linux/Mac terminal.

```
copt_cmd
```

If you see log information as follows, the COPT client, `copt_cmd`, has obtained the floating token successfully. COPT command-line tool is ready to solve optimization problems.

```
> copt_cmd
Cardinal Optimizer v6.0.0. Build date Oct 10 2022
Copyright Cardinal Operations 2022. All Rights Reserved

[ Info] initialize floating client: ./client.ini

[ Info] connecting to server ...
[ Info] connection established
COPT>
```

If you see log information as follows, the COPT client, `copt_cmd`, has connected to COPT Floating Token Server. But due to limited number of tokens, client waits in queue of size 1.

```
> copt_cmd
Cardinal Optimizer v6.0.0. Build date Oct 10 2022
Copyright Cardinal Operations 2022. All Rights Reserved

[ Info] Initialize floating client: ./client.ini

[ Info] connecting to server ...
[Error] empty license and queue size 1
[ Info] Wait for license in 2 / 39 secs
[ Info] Wait for license in 4 / 39 secs
[ Info] Wait for license in 6 / 39 secs
[ Info] Wait for license in 8 / 39 secs
[ Info] Wait for license in 10 / 39 secs
[ Info] Wait for license in 20 / 39 secs
[ Info] Wait for license in 30 / 39 secs
```

If you see log information as follows, the COPT client, `copt_cmd`, has connected to COPT Floating Token Server. But client refused to wait in queue, as Queue time is 0.

```
> copt_cmd
Cardinal Optimizer v6.0.0. Build date Oct 10 2022
Copyright Cardinal Operations 2022. All Rights Reserved

[ Info] Initialize floating client: ./client.ini

[ Info] connecting to server ...
[Error] Server error: "no more token available", code = 2
[Error] Fail to open: ./license.dat

[Error] Fail to initialize cmdline
```

If you see log information as follows, the COPT client, `copt_cmd`, fails to connect to COPT Floating Token Server. Finally, client quits after time limit.

```
> copt_cmd
Cardinal Optimizer v6.0.0. Build date Oct 10 2022
Copyright Cardinal Operations 2022. All Rights Reserved
```



```
[ Info] initialize floating client: ./client.ini

[ Info] connecting to server ...
[ Info] wait for license in  2 / 10 secs
[ Info] wait for license in  4 / 10 secs
[ Info] wait for license in  6 / 10 secs
[ Info] wait for license in  8 / 10 secs
[ Info] wait for license in 10 / 10 secs
[Error] timeout at waiting for license
[Error] fail to open: ./license.dat

[Error] Fail to initialize cmdline
```

## 4.3 Floating Token Server Managing Tool

COPT floating token service ships with a tool `copt_flstool`, for retrieving information and tune parameters of floating token server on fly.

### 4.3.1 Tool Usage

Execute the following command in Windows console, Linux or MacOS terminal:

```
> copt_flstool
```

Below displays help messages of this tool:

```
> copt_flstool
COPT Floating Token Server Managing Tool

copt_flstool [-s server ip] [-p port] [-x passwd] command <param>

commands are:  addblackrule <127.0.0.1/20[-user@machine]>
               addwhiterule <127.0.*.*[+user@machine]>
               getfilters
               getinfo
               resetfilters
               setpasswd <xxx>
               toggleblackrule <n-th>
               togglewhiterule <n-th>
               writefilters
```

If the `-s` and `-p` option are present, tool connects to floating token server with given server IP and port. Otherwise, tool connections to localhost and default port 7878. If floating token server sets a password, tool must provide password string after the `-x` option.

This tool provides the following commands:

- **AddBlackRule:** Add a new rule in black filters. each rule has format starting with non-empty IP address, which may have wildcard to match IPs in the scope. In addition, it is optional to be followed by including (+) or excluding (-) user name at machine name.
- **AddWhiteRule:** Add a new rule in white filters. Note that a white rule has the same format as a black rule.
- **GetFilters:** Get all rules of black filters, white filters and tool filters, along with relative sequence numbers, which are parameters for command `ToggleBlackRule` and `ToggleWhiteRule`.
- **GetInfo:** Get general information of floating token server, including token usage, connected clients, and all COPT versions in support.

- **ResetFilters:** Reset filter lists in memory to those on filter config file.
  - **SetPasswd:**  
Update password of target floating token server on fly.
  - **ToggleBlackRule:**  
Toggle between enabling and disabling a black rule, given its sequence number by GetFilters.
- **ToggleWhiteRule:** Toggle between enabling and disabling a white rule, given its sequence number by GetFilters.
- **WriteFilters:** Write filter lists in memory to filter config file.

### 4.3.2 Example Usage

The following command lists general information on local machine.

```
> copt_flstool GetInfo

[ Info] COPT Floating Token Server Managing Tool, COPT v6.0.0 20221010
[ Info] connecting to localhost:7979
[ Info] [command] wait for connecting to floating token server
[ Info] [floating] general info
# of available tokens is 3 / 3, queue size is 0
# of active clients is 0
```

To run managing tool on other machine, its IP should be added to a rule in ToolList section in filter configuration file flsfilters.ini. The following command from other machine lists information of server 192.168.1.11.

```
> copt_flstool -s 192.168.1.11 GetInfo

[ Info] COPT Floating Token Server Managing Tool, COPT v6.0.0 20221010
[ Info] connecting to 192.168.1.11:7979
[ Info] [command] wait for connecting to floating token server
[ Info] [floating] general info
# of available tokens is 3 / 3, queue size is 0
# of active clients is 0
```

The following command shows all filter lists of server 192.168.1.11, including those in BlackList section, WhiteList section and ToolList section.

```
> copt_flstool -s 192.168.1.11 GetFilters

[ Info] COPT Floating Token Server Managing Tool, COPT v6.0.0 20221010
[ Info] connecting to 192.168.1.11:7979
[ Info] [command] wait for connecting to floating token server
[ Info] [floating] filters info
[BlackList]

[WhiteList]

[ToolList]
[1] 127.0.0.1
```

The following command added user of IP 192.168.3.13 to black list.

```
> copt_flstool -s 192.168.1.11 AddBlackRule 192.168.3.13

[ Info] COPT Floating Token Server Managing Tool, COPT v6.0.0 20221010
[ Info] connecting to 192.168.1.11:7979
[ Info] [command] wait for connecting to floating token server
```

```
[ Info] [floating] server added new black rule (succeeded)
```

The following command shows that a new rule in BlackList section is added.

```
> copt_flstool -s 192.168.1.11 GetFilters
```

```
[ Info] COPT Floating Token Server Managing Tool, COPT v6.0.0 20221010
[ Info] connecting to 192.168.1.11:7979
[ Info] [command] wait for connecting to floating token server
[ Info] [floating] filters info
[BlackList]
  [1] 192.168.3.133
```

```
[WhiteList]
```

```
[ToolList]
  [1] 127.0.0.1
```

The following command disable a rule in BlackList section.

```
> copt_flstool -s 192.168.1.11 ToggleBlackRule 1
```

```
[ Info] COPT Floating Token Server Managing Tool, COPT v6.0.0 20221010
[ Info] connecting to 192.168.1.11:7979
[ Info] [command] wait for connecting to floating token server
[ Info] [floating] server toggle black rule [1] (succeeded)
```

## 4.4 Running as service

To run COPT floating token server as a system service, follow steps described in `readme.txt` under floating folder, and set config file `copt_flserver.service` properly.

Below is `readme.txt`, which lists installing steps in both Linux and MacOS platforms.

```
[Linux] To run copt_flserver as a service with systemd

Add a systemd file
  copy copt_flserver.service to /lib/systemd/system/
  sudo systemctl daemon-reload

Enable new service
  sudo systemctl start copt_flserver.service
  or
  sudo systemctl enable copt_flserver.service

Restart service
  sudo systemctl restart copt_flserver.service

Stop service
  sudo systemctl stop copt_flserver.service
  or
  sudo systemctl disable copt_flserver.service

Verify service is running
  sudo systemctl status copt_flserver.service

[MacOS] To run copt_flserver as a service with launchctrl

Add a plist file
  copy copt_flserver.plist to /Library/LaunchAgents as current user
```

(continues on next page)

(continued from previous page)

```

or
copy copt_flserver.plist to /Library/LaunchDaemons with the key 'UserName'

Enable new service
sudo launchctl load -w /Library/LaunchAgents/copt_flserver.plist
or
sudo launchctl load -w /Library/LaunchDaemons/copt_flserver.plist

Stop service
sudo launchctl unload -w /Library/LaunchAgents/copt_flserver.plist
or
sudo launchctl unload -w /Library/LaunchDaemons/copt_flserver.plist

Verify service is running
sudo launchctl list shanshu.copt.flserver

```

#### 4.4.1 Linux

Below are steps in details of how to run COPT floating token server as a system service in Linux platform.

For instance, assume that COPT remote service is installed under '/home/eleven'. In your terminal, type the following command to enter the root directory of floating service.

```
cd /home/eleven/copt_remote60/floating
```

modify template of the service config file `copt_flserver.service` in text format:

```

[Unit]
Description=COPT Floating Token Server

[Service]
WorkingDirectory=/path/to/service
ExecStart=/path/to/service/copt_flserver
Restart=always
RestartSec=1

[Install]
WantedBy=multi-user.target

```

That is, update template path in keyword `WorkingDirectory` and `ExecStart` to actual path where the floating service exists.

```

[Unit]
Description=COPT Floating Token Server

[Service]
WorkingDirectory=/home/eleven/copt_remote60/floating
ExecStart=/home/eleven/copt_remote60/floating/copt_flserver
Restart=always
RestartSec=1

[Install]
WantedBy=multi-user.target

```

Afterwards, copy `copt_flserver.service` to system service folder `/lib/systemd/system/` (see below).

```
sudo cp copt_flserver.service /lib/systemd/system/
```

The following command may be needed if you add or update service config file. It is not needed if service unit has been loaded before.

```
sudo systemctl daemon-reload
```

The following command starts the new floating service.

```
sudo systemctl start copt_flserver.service
```

To verify the floating service is actually running, type the following command

```
sudo systemctl status copt_flserver.service
```

If you see logs similar to below, COPT floating server is running successfully as a system service.

```
copt_flserver.service - COPT Floating Token Server
Loaded: loaded (/lib/systemd/system/copt_flserver.service; enabled; vendor preset:
➔enabled)
Active: active (running) since Tue 2021-06-29 11:46:10 CST; 3s ago
Main PID: 3054 (copt_flserver)
Tasks: 6 (limit: 4915)
CGroup: /system.slice/copt_flserver.service
        └─3054 /home/eleven/copt_remote60/floating/copt_flserver
```

```
eleven-ubuntu systemd[1]: Started COPT Floating Token Server.
eleven-ubuntu COPTCLS[3054]: LWS: 4.1.4-b2011a00, loglevel 1039
eleven-ubuntu COPTCLS[3054]: NET CLI SRV H1 H2 WS IPv6-absent
eleven-ubuntu COPTCLS[3054]: server started at port 7979
```

To stop the floating service, type the following command

```
sudo systemctl stop copt_flserver.service
```

### 4.4.2 MacOS

Below are steps in details of how to run COPT floating token server as a system service in MacOS platform.

For instance, assume that COPT remote service is installed under '/Applications'. In your terminal, type the following command to enter the root directory of floating service.

```
cd /Applications/copt_remote60/floating
```

modify template of the service config file `copt_flserver.plist` in xml format:

```
<?xml version="1.0" encoding="UTF-8"?>
<plist version="1.0">
  <dict>
    <key>Label</key>
    <string>shanshu.copt.flserver</string>
    <key>Program</key>
    <string>/path/to/service/copt_flserver</string>
    <key>RunAtLoad</key>
    <true/>
    <key>KeepAlive</key>
    <true/>
  </dict>
</plist>
```

That is, update template path in Program tag to actual path where the floating service exists.

```
<?xml version="1.0" encoding="UTF-8"?>
<plist version="1.0">
  <dict>
```

```

    <key>Label</key>
    <string>shanshu.copt.flserver</string>
    <key>Program</key>
    <string>/Applications/copt_remote60/floating/copt_flserver</string>
    <key>RunAtLoad</key>
    <true/>
    <key>KeepAlive</key>
    <true/>
  </dict>
</plist>

```

Afterwards, copy `copt_flserver.plist` to system service folder `/Library/LaunchAgents` (see below).

```
sudo cp copt_flserver.plist /Library/LaunchAgents
```

The following command starts the new floating service.

```
sudo launchctl load -w /Library/LaunchAgents/copt_flserver.plist
```

To verify the floating service is actually running, type the following command

```
sudo launchctl list shanshu.copt.flserver
```

If you see logs similar to below, COPT floating server is running successfully as a system service.

```

{
  "LimitLoadToSessionType" = "System";
  "Label" = "shanshu.copt.flserver";
  "OnDemand" = false;
  "LastExitStatus" = 0;
  "PID" = 16406;
  "Program" = "/Applications/copt_remote60/floating/copt_flserver";
};

```

To stop the floating service, type the following command

```
sudo launchctl unload -w /Library/LaunchAgents/copt_flserver.plist
```

If the floating service should be run by a specific user, add `UserName` tag to config file. Below adds a user `eleven`, who has privilege to run the floating service.

```

<?xml version="1.0" encoding="UTF-8"?>
<plist version="1.0">
  <dict>
    <key>Label</key>
    <string>shanshu.copt.flserver</string>
    <key>Program</key>
    <string>/Applications/copt_remote60/floating/copt_flserver</string>
    <key>UserName</key>
    <string>eleven</string>
    <key>RunAtLoad</key>
    <true/>
    <key>KeepAlive</key>
    <true/>
  </dict>
</plist>

```

Then copy new `copt_flserver.plist` to system service folder `/Library/LaunchDaemons` (see below).

```
sudo cp copt_flserver.plist /Library/LaunchDaemons
```

The following command starts the new floating service.

```
sudo launchctl load -w /Library/LaunchDaemons/copt_flserver.plist
```

To stop the floating service, type the following command

```
sudo launchctl unload -w /Library/LaunchDaemons/copt_flserver.plist
```

## Chapter 5

# COPT Compute Cluster Service

The **Cardinal Optimizer** provides COPT compute cluster service on all supported platforms, which allows you to offload optimization computations from COPT client applications over local network.

Once COPT compute cluster server runs at local network, any COPT client application with matching COPT version can connect to server and offload optimization computations. That is, COPT compute cluster clients are allowed to do modelling locally, execute optimization jobs remotely, and then obtain results interactively.

Note that the more computing power server has, the more optimization jobs can run simultaneously. Furthermore, COPT compute cluster service has functionality to cluster multiple servers together and therefore serve more COPT compute cluster clients over local network.

### 5.1 Server Setup

The COPT compute cluster service includes `copt_cluster` executable and a configuration file `cls.ini`. The very first thing to do when cluster server starts is to verify cluster license locally, whose path is specified in `cls.ini`. If local validation passes, cluster server might connect remotely to COPT licensing server for further validation, such as verifying machine IP, which is supposed to match IP range that user provided during registration. This means the server running COPT compute cluster service should have internet access in specified area, such as campus network. For details, please see descriptions below or refer to *How to obtain and setup license*.

#### 5.1.1 Installation

The **Cardinal Optimizer** provides a separate package for remote services, which include COPT compute cluster. Users may apply for remote package from customer service. Afterwards, unzip the remote package and move to any folder on your computer. The software is portable and does not change anything in the system it runs on. Below are details of installation.

##### Windows

Please unzip the remote package and move to any folder. Though, it is common to move to folder under `C:\Program Files`.

##### Linux

To unzip the remote package, enter the following command in terminal:

```
tar -xzf CardinalOptimizer-Remote-6.0.0-lnx64.tar.gz
```

Then, the following command moves folder `copt_remote60` in current directory to other path. For an example, admin user may move it to folder under `/opt` and standard user may move it to `$HOME`.

```
sudo mv copt_remote60 /opt
```



Note that it requires root privilege to execute this command.

### MacOS

To unzip the remote package, enter the following command in terminal:

```
tar -xzf CardinalOptimizer-Remote-6.0.0-osx64.tar.gz
```

Then, the following command moves folder `copt_remote60` in current directory to other path. For an example, admin user may move it to folder under `/Applications` and standard user may move it to `$HOME`.

```
mv copt_remote60 /Applications
```

If you see errors below or similar signature problem of COPT lib during installation,

```
"libcopt.dylib" cannot be opened because the developer cannot be verified.  
macOS cannot verify that this app is free from malware.
```

run the following command as root user, to bypass check of loading dynamic lib on MacOS.

```
xattr -d com.apple.quarantine CardinalOptimizer-Remote-6.0.0-osx64.tar.gz
```

or

```
xattr -dr com.apple.quarantine /Applications/copt_remote60
```

### 5.1.2 Cluster License

After installing COPT remote package, it requires cluster license to run. It is preferred to save cluster license files, `license.dat` and `license.key`, to `cluster` folder in path of remote package.

#### Windows

If the COPT remote package is installed under "`C:\Program Files`", execute the following command to enter `cluster` folder in path of remote package.

```
cd "C:\Program Files\copt_remote60\cluster"
```

Note that the tool `copt_licgen` creating license files exists under `tools` folder in path of remote package. The following command creates cluster license files in current directory, given a cluster license key, such as `7483dff0863ffdae9fff697d3573e8bc`.

```
..\tools\copt_licgen -key 7483dff0863ffdae9fff697d3573e8bc
```

#### Linux and MacOS

If the COPT remote package is installed under `/Applications`, execute the following command to enter `cluster` folder in path of remote package on MacOS system.

```
cd /Applications/copt_remote60/cluster
```

The following command creates cluster license files in current directory, given a cluster license key, such as `7483dff0863ffdae9fff697d3573e8bc`.

```
../tools/copt_licgen -key 7483dff0863ffdae9fff697d3573e8bc
```

In addition, if users run the above command when current directory is different than `cluster` folder in path of remote package, it is preferred to move them to `cluster`. The following command does so.

```
mv license.* /Application/copt_remote60/cluster
```

### 5.1.3 Configuration

Below is a typical configuration file, `cls.ini`, of COPT compute cluster.

```
[Main]
Port = 7878
# Number of total tokens, what copt jobs can run simultaneously up to.
NumToken = 3
# Password is case-sensitive and default is empty;
# It applies to both copt clients and cluster nodes.
PassWd =
# Data folder of cluster relative to its binary folder,
# where multiple versions of copt libraries and related licenses reside.
DataFolder = ./data

[SSL]
# Needed if connecting using SSL/TLS
CaFile =
CertFile =
CertkeyFile =

[Licensing]
# If empty or default license name, it is from binary folder;
# To get license files from cwd, add prefix "./";
# Full path is supported as well.
LicenseFile = license.dat
PubkeyFile = license.key

[Cluster]
# Host name and port of parent node in cluster.
# Default is empty, meaning not connecting to other node.
Parent =
PPort = 7878

[Filter]
# default policy 0 indicates accepting all connections, except for ones in blacklist
# otherwise, denying all connections except for ones in whitelist
DefaultPolicy = 0
UseBlackList = true
UseWhiteList = true
FilterListFile = clsfilters.ini
```

The **Main** section specifies port number, through which COPT compute cluster clients connect to server; token number, the number of optimization jobs that server can run simultaneously up to; password string, if specified, cluster clients should send the same password when requesting for service.

The COPT compute cluster may install multiple versions of COPT to subfolder of **DataFolder**. Only clients with matching version (major and minor) will get approved and then offload optimization jobs at server side. Note that the COPT compute cluster pre-installs a COPT solver of the same version as server itself, which illustrate how to install other versions of COPT.

For instance, the COPT compute cluster has default COPT v6.0.0 installed and users plan to install COPT of other version v4.0.7. users may create a folder `./data/copt/4.0.7/` and copy a COPT C lib of the same version to it. Specifically, on Linux platform, copy C dynamic library `libcopt.so` from the binary folder `$COPT_HOME/lib/` of COPT v4.0.7 to subfolder `./data/copt/4.0.7/` of the COPT compute cluster.

Furthermore, users are allowed to install newer version of COPT than cluster server version, such as COPT v7.0.0. To do so, follow the same step of copying a C lib of COPT v7.0.0 to `./data/copt/7.0.0/`. In addition, users need a personal license of v7.0.0 to load C lib of COPT v7.0.0 at server side. That is, copy valid personal license files to folder `./data/copt/7.0.0/` as well. However, this simple procedure may break if the newer COPT solver has significant updates. In this case, it is necessary to upgrade the COPT compute cluster to newer version, that is, v7.0.0.

Below is an example of directory structure of cluster server on Linux platform. It includes pre-installed COPT v6.0.0, COPT of previous version v4.0.7, and COPT of newer version v7.0.0.

```
~/copt_remote60/cluster
├── cls.ini
├── copt_cluster
├── license.dat -> cluster license v6.0.0
├── license.key
└── data
    └── copt
        ├── 4.0.7
        │   └── libcopt.so
        ├── 6.0.0
        │   └── libcopt.so
        ├── 7.0.0
        │   ├── libcopt.so
        │   ├── license.dat -> license v7.0.0
        │   └── license.key
```

The **Licensing** section specifies location of cluster license files. As described in comments above, if empty string or default license file name is specified, cluster license files are read from the binary folder where the cluster executable reside.

It is possible to run COPT compute cluster service, even if cluster license files do not exist in the same folder as the cluster executive. One option is to set **Licensing** = `./license.dat` and **PubkeyFile** = `./license.key`. By doing so, the COPT compute cluster reads cluster license files from the current working directory. That is, user could execute command at the path where cluster license files exist to run service.

The other option is to set full path of license files in configuration. As mentioned before, Cardinal Optimizer allows user to set environment variable **COPT\_LICENSE\_DIR** for license files. For details, please refer to *How to install Cardinal Optimizer*. If user prefers the way of environment variable, **cls.ini** should have the full path to cluster license files.

The **Cluster** section specifies IP and port number of parent node. By connecting to parent node, this server joins a cluster of servers running COPT compute cluster service. The default value is empty, which means this server does not join other cluster group.

In the **Filter** section, **DefaultPolicy** has default value 0, meaning all connections are accepted except for those in black lists; if it is set to non-zero value, then all connection are blocked except for those in white lists. In addition, black list is enabled if **UseBlackList** is true and white list is enabled if **UseWhiteList** is true. The filter configuration file is specified by **FilterListFile**. Below is an example of the filter configuration file.

```
[BlackList]
# 127.0.*.* + user@machine*

[WhiteList]
# 127.0.1.2/16 - user@machine*

[ToolList]
# only tool client at server side can access by default
127.0.0.1/32
```

It has three sections and each section has its own rules. In section of **BlackList**, one may add rules to block others from connection. In section of **WhiteList**, one may add rules to grant others for connection, even if the default policy is to block all connections. Only users listed in section of **ToolList** are able to connect to cluster server by Cluster Managing Tool (see below for details).

Specifically, rules in filter configuration have format of starting with IP address. To specify IP range, you may include wildcard (\*) in IP address, or use CIDR notation, that is, a IPv4 address and its associated network prefix. In addition, a rule may include (+) or exclude (-) given user at given machine, such

as 127.0.1.2/16 - user@machine. Here, user refers to username, which can be queried by `whoami` on Linux/MacOS platform; machine refers to computer name, which can be queried by `hostname` on Linux/MacOS platform.

### 5.1.4 Example Usage

Suppose that cluster license files exist in the same folder where the cluster executable reside. To start the COPT compute cluster, just execute the following command at any directory in Windows console, or Linux/Mac terminal.

```
copt_cluster
```

If you see log information as follows, the COPT compute cluster has been successfully started. Server monitors any connection from COPT compute cluster clients, manages client requests in queue as well as approved clients. User may stop cluster server anytime when entering `q` or `Q`.

```
> copt_cluster
[ Info] start COPT Compute Cluster, COPT v6.0.0 20221010
[ Info] [NODE] node has been initialized
[ Info] server started at port 7878
```

If failed to verify local cluster license, or something is wrong on remote COPT licensing server, you might see error logs as follows.

```
> copt_cluster
[ Info] start COPT Compute Cluster, COPT v6.0.0 20221010
[Error] Invalid signature in public key file
[Error] Fail to verify local license
```

and

```
> copt_cluster
[ Info] start COPT Compute Cluster, COPT v6.0.0 20221010
[Error] Error to connect license server
[Error] Fail to verify cluster license by server
```

## 5.2 Client Setup

The COPT compute cluster client can be COPT command-line, or any application which solves problems by COPT API, such as COPT cpp/java/csharp/python interface. The COPT compute cluster service is a better approach in terms of flexibility and efficiency. Any COPT compute cluster client can legally run Cardinal Optimizer without local license.

### 5.2.1 Configuration

Before running COPT as cluster client, please make sure that you have installed COPT locally. For details, please refer to [How to install Cardinal Optimizer](#). Users can skip obtaining local licenses by adding a cluster configuration file `client.ini`.

Below is a typical configuration file, `client.ini`, of COPT compute cluster client.

```
Cluster = 192.168.1.11
Port = 7878
QueueTime = 600
Passwd =
```

As configured above, COPT compute cluster client tries to connect to 192.168.1.11 at port 7878 with waiting time in queue up to 600 seconds. Here, the default value of `Cluster` is localhost; `QueueTime` or

WaitTime is set to 0 if empty or not specified. Specifically, empty QueueTime means client does not wait and should quit immediately, if the COPT compute cluster have no more token available. Port number must be great than zero if specified and should be the same as that specified in cluster configuration file cls.ini. Note that keywords in the configuration file are case insensitive.

To run as a COPT compute cluster client, an application must have configuration file, client.ini, in one of the following three locations, that is, current working directory, environment directory by COPT\_LICENSE\_DIR and binary directory where COPT executable resides.

By design, COPT application reads local license files instead of client.ini, if they both exist in the same location. However, if local license files are under the environment directory, to connect to cluster server, user could simply add a configuration file, client.ini, under the current working directory (different from the environment directory).

If a COPT application calls COPT API to solve problems, such as COPT python interface, license is checked as soon as COPT environment object is created. If there only exists proper configuration file, client.ini, the application works as a COPT compute cluster client and obtains token to offload optimization jobs. As soon as COPT environment object is destroyed, the COPT compute cluster server is notified to release token and thus to approve more requests waiting in queue.

## 5.2.2 Example Usage

Suppose that we've set configuration file client.ini properly and have no local license, below is an example of connecting to cluster server by COPT command-line tool copt\_cmd. Execute the following command in Windows console, or Linux/Mac terminal.

```
copt_cmd
```

If you see log information as follows, the COPT compute cluster client, copt\_cmd, has connected to cluster server successfully. COPT command-line tool is ready to do modelling locally and then offload optimization jobs to server.

```
> copt_cmd
Cardinal Optimizer v6.0.0. Build date Oct 10 2022
Copyright Cardinal Operations 2022. All Rights Reserved

[ Info] initialize cluster client with ./client.ini

[ Info] wait for server in 0 / 39 secs
[ Info] connecting to cluster server 192.168.1.11:7878
COPT>
```

If you see log information as follows, the COPT compute cluster client, copt\_cmd, has connected to cluster server. However, due to limited number of tokens, it waits in queue of size 5, until timeout.

```
> copt_cmd
Cardinal Optimizer v6.0.0. Build date Oct 10 2022
Copyright Cardinal Operations 2022. All Rights Reserved

[ Info] initialize cluster client with ./client.ini

[ Info] wait for server in 0 / 39 secs
[ Info] connecting to cluster server 192.168.1.11:7878

[ Warn] wait in queue of size 5
[ Info] wait for license in 2 / 39 secs
[ Info] wait for license in 4 / 39 secs
[ Info] wait for license in 6 / 39 secs
[ Info] wait for license in 8 / 39 secs
[ Info] wait for license in 10 / 39 secs
[ Info] wait for license in 20 / 39 secs
```

```
[ Info] wait for license in 30 / 39 secs
[Error] timeout at waiting for server approval
[Error] Fail to initialize copt command-line tool
```

If you see log information as follows, the COPT compute cluster client, `copt_cmd`, has connected to cluster server. But it refused to wait in queue, as Queue time was set to 0. Therefore, client quits with error immediately.

```
> copt_cmd
Cardinal Optimizer v6.0.0. Build date Oct 10 2022
Copyright Cardinal Operations 2022. All Rights Reserved

[ Info] initialize cluster client with ./client.ini

[ Info] wait for server in 0 / 9 secs
[ Info] connecting to cluster server 192.168.1.11:7878
[ Warn] server error: "no more token available", code = 129
[Error] Fail to initialize copt command-line tool
```

If you see log information as follows, the COPT compute cluster client, `copt_cmd`, fails to connect to cluster server. Finally, client quits after timeout.

```
> copt_cmd
Cardinal Optimizer v6.0.0. Build date Oct 10 2022
Copyright Cardinal Operations 2022. All Rights Reserved

[ Info] initialize cluster client with ./client.ini

[ Info] wait for server in 0 / 39 secs
[ Info] connecting to cluster server 192.168.1.11:7878
[ Info] wait for license in 2 / 39 secs
[ Info] wait for license in 4 / 39 secs
[ Info] wait for license in 6 / 39 secs
[ Info] wait for license in 8 / 39 secs
[ Info] wait for license in 10 / 39 secs
[ Info] wait for license in 20 / 39 secs
[ Info] wait for license in 30 / 39 secs
[Error] timeout at waiting for server approval
[Error] Fail to initialize copt command-line tool
```

## 5.3 COPT Cluster Managing Tool

COPT cluster service ships with a tool `copt_clstool`, for retrieving information and tune parameters of cluster servers on fly.

### 5.3.1 Tool Usage

Execute the following command in Windows console, Linux or MacOS terminal:

```
> copt_clstool
```

Below displays help messages of this tool:

```
> copt_clstool
COPT Cluster Managing Tool

copt_clstool [-s server ip] [-p port] [-x passwd] command <param>
```

(continues on next page)

(continued from previous page)

```
commands are:  addblackrule <127.0.0.1/20[-user@machine]>
                addwhiterule <127.0.*.*[+user@machine]>
                getfilters
                getinfo
                getnodes
                reload
                resetfilters
                setparent <xxx:7878>
                setpasswd <xxx>
                settoken <num>
                toggleblackrule <n-th>
                togglewhiterule <n-th>
                writefilters
```

If the `-s` and `-p` option are present, tool connects to cluster server with given server IP and port. Otherwise, tool connections to localhost and default port 7878. If cluster server sets a password, tool must provide password string after the `-x` option.

This tool provides the following commands:

- **AddBlackRule:** Add a new rule in black filters. each rule has format starting with non-empty IP address, which may have wildcard to match IPs in the scope. In addition, it is optional to be followed by including (+) or excluding (-) user name at machine name.
- **AddWhiteRule:** Add a new rule in white filters. Note that a white rule has the same format as a black rule.
- **GetFilters:** Get all rules of black filters, white filters and tool filters, along with relative sequence numbers, which are parameters for command **ToggleBlackRule** and **ToggleWhiteRule**.
- **GetInfo:** Get general information of cluster server, including token usage, connected clients, and all COPT versions in support.
- **GetNodes:** Get information of nodes in cluster, including parent address and status, all children nodes.
- **Reload:** Reload available token information of all child nodes, in case it is not consistent for various reasons.
- **ResetFilters:** Reset filter lists in memory to those on filter config file.
- **SetParent:** Change parent node address on fly and then connecting to new parent. In this way, it avoids draining operation when stopping a node for maintainance purpose.
- **SetPasswd:** Update password of target cluster server on fly.
- **SetToken:** Change token number of target cluster server on fly.
- **ToggleBlackRule:** Toggle between enabling and disabling a black rule, given its sequence number by **GetFilters**.
- **ToggleWhiteRule:** Toggle between enabling and disabling a white rule, given its sequence number by **GetFilters**.
- **WriteFilters:** Write filter lists in memory to filter config file.

### 5.3.2 Example Usage

The following command lists general information on local machine.

```
> copt_clstool GetInfo

[ Info] COPT Cluster Managing Tool, COPT v6.0.0 20221010
[ Info] connecting to localhost:7878
[ Info] [command] wait for connecting to cluster
[ Info] [cluster] general info
# of available tokens is 3 / 3, queue size is 0
# of active clients is 0
# of installed COPT versions is 1
COPT v6.0.0
```

To run managing tool on other machine, its IP should be added to a rule in ToolList section in filter configuration file flsfilters.ini. The following command from other machine lists cluster information of server 192.168.1.11.

```
> copt_clstool -s 192.168.1.11 GetNodes

[ Info] COPT Cluster Managing Tool, COPT v6.0.0 20221010
[ Info] connecting to 192.168.1.11:7878
[ Info] [command] wait for connecting to cluster
[ Info] [cluster] node info
[Parent] (null):7878 (Lost)
[Child] Node_192.168.1.12:7878_N0001, v2.0=3
Total num of child nodes is 1
```

The following command changes token number of server 192.168.1.11 from 3 to 0.

```
> copt_clstool -s 192.168.1.11 SetToken 0

[ Info] COPT Cluster Managing Tool, COPT v6.0.0 20221010
[ Info] connecting to 192.168.1.11:7878
[ Info] [command] wait for connecting to cluster
[ Info] [cluster] total token was 3 and now set to 0
```

The following command shows all filter lists of server 192.168.1.11, including those in BlackList section, WhiteList section and ToolList section.

```
> copt_clstool -s 192.168.1.11 GetFilters

[ Info] COPT Cluster Managing Tool, COPT v6.0.0 20221010
[ Info] connecting to 192.168.1.11:7979
[ Info] [command] wait for connecting to cluster
[ Info] [cluster] filters info
[BlackList]

[WhiteList]

[ToolList]
[1] 127.0.0.1
```

The following command added user of IP 192.168.3.13 to black list.

```
> copt_clstool -s 192.168.1.11 AddBlackRule 192.168.3.133

[ Info] COPT Cluster Managing Tool, COPT v6.0.0 20221010
[ Info] connecting to 192.168.1.11:7979
[ Info] [command] wait for connecting to cluster
[ Info] [cluster] server added new black rule (succeeded)
```



The following command shows that a new rule in BlackList section is added.

```
> copt_clstool -s 192.168.1.11 GetFilters

[ Info] COPT Cluster Managing Tool, COPT v6.0.0 20221010
[ Info] connecting to 192.168.1.11:7979
[ Info] [command] wait for connecting to cluster
[ Info] [cluster] filters info
[BlackList]
  [1] 192.168.3.133

[WhiteList]

[ToolList]
  [1] 127.0.0.1
```

The following command disable a rule in BlackList section.

```
> copt_clstool -s 192.168.1.11 ToggleBlackRule 1

[ Info] COPT Cluster Managing Tool, COPT v6.0.0 20221010
[ Info] connecting to 192.168.1.11:7979
[ Info] [command] wait for connecting to cluster
[ Info] [cluster] server toggle black rule [1] (succeeded)
```

## 5.4 Running as service

To run COPT compute cluster server as a system service, follow steps described in `readme.txt` under `cluster` folder, and set config file `copt_cluster.service` properly.

Below is `readme.txt`, which lists installing steps in both Linux and MacOS platforms.

```
[Linux] To run copt_cluster as a service with systemd

Add a systemd file
  copy copt_cluster.service to /lib/systemd/system/
  sudo systemctl daemon-reload

Enable new service
  sudo systemctl start copt_cluster.service
  or
  sudo systemctl enable copt_cluster.service

Restart service
  sudo systemctl restart copt_cluster.service

Stop service
  sudo systemctl stop copt_cluster.service
  or
  sudo systemctl disable copt_cluster.service

Verify service is running
  sudo systemctl status copt_cluster.service

[MacOS] To run copt_cluster as a service with launchctrl

Add a plist file
  copy copt_cluster.plist to /Library/LaunchAgents as current user
  or
  copy copt_cluster.plist to /Library/LaunchDaemons with the key 'UserName'
```

(continues on next page)

(continued from previous page)

```

Enable new service
    sudo launchctl load -w /Library/LaunchAgents/copt_cluster.plist
or
    sudo launchctl load -w /Library/LaunchDaemons/copt_cluster.plist

Stop service
    sudo launchctl unload -w /Library/LaunchAgents/copt_cluster.plist
or
    sudo launchctl unload -w /Library/LaunchDaemons/copt_cluster.plist

Verify service is running
    sudo launchctl list shanshu.copt.cluster

```

### 5.4.1 Linux

Below are steps in details of how to run COPT compute cluster server as a system service in Linux platform.

For instance, assume that COPT remote service is installed under '/home/eleven'. In your terminal, type the following command to enter the root directory of cluster service.

```
cd /home/eleven/copt_remote60/cluster
```

modify template of the service config file `copt_cluster.service` in text format:

```

[Unit]
Description=COPT Compute Cluster Server

[Service]
WorkingDirectory=/path/to/service
ExecStart=/path/to/service/copt_cluster
Restart=always
RestartSec=1

[Install]
WantedBy=multi-user.target

```

That is, update template path in keyword `WorkingDirectory` and `ExecStart` to actual path where the cluster service exists.

```

[Unit]
Description=COPT Compute Cluster Server

[Service]
WorkingDirectory=/home/eleven/copt_remote60/cluster
ExecStart=/home/eleven/copt_remote60/cluster/copt_cluster
Restart=always
RestartSec=1

[Install]
WantedBy=multi-user.target

```

Afterwards, copy `copt_cluster.service` to system service folder `/lib/systemd/system/` (see below).

```
sudo cp copt_cluster.service /lib/systemd/system/
```

The following command may be needed if you add or update service config file. It is not needed if service unit has been loaded before.

```
sudo systemctl daemon-reload
```

The following command starts the new cluster service.

```
sudo systemctl start copt_cluster.service
```

To verify the cluster service is actually running, type the following command

```
sudo systemctl status copt_cluster.service
```

If you see logs similar to below, COPT compute cluster server is running successfully as a system service.

```
copt_cluster.service - COPT Cluster Server
Loaded: loaded (/lib/systemd/system/copt_cluster.service; enabled; vendor preset:
➔enabled)
Active: active (running) since Sat 2021-08-28 11:46:10 CST; 3s ago
Main PID: 3054 (copt_cluster)
Tasks: 6 (limit: 4915)
CGroup: /system.slice/copt_cluster.service
        └─3054 /home/eleven/copt_remote60/cluster/copt_cluster
```

```
eleven-ubuntu systemd[1]: Started COPT Cluster Server.
eleven-ubuntu COPTCLS[3054]: LWS: 4.1.4-b2011a00, loglevel 1039
eleven-ubuntu COPTCLS[3054]: NET CLI SRV H1 H2 WS IPv6-absent
eleven-ubuntu COPTCLS[3054]: server started at port 7878
eleven-ubuntu COPTCLS[3054]: LWS: 4.1.4-b2011a00, loglevel 1039
eleven-ubuntu COPTCLS[3054]: NET CLI SRV H1 H2 WS IPv6-absent
eleven-ubuntu COPTCLS[3054]: [NODE] node has been initialized
```

To stop the cluster service, type the following command

```
sudo systemctl stop copt_cluster.service
```

## 5.4.2 MacOS

Below are steps in details of how to run COPT Compute Cluster server as a system service in MacOS platform.

For instance, assume that COPT remote service is installed under `"/Applications"`. In your terminal, type the following command to enter the root directory of cluster service.

```
cd /Applications/copt_remote60/cluster
```

modify template of the service config file `copt_cluster.plist` in xml format:

```
<?xml version="1.0" encoding="UTF-8"?>
<plist version="1.0">
  <dict>
    <key>Label</key>
    <string>shanshu.copt.cluster</string>
    <key>Program</key>
    <string>/path/to/service/copt_cluster</string>
    <key>RunAtLoad</key>
    <true/>
    <key>KeepAlive</key>
    <true/>
  </dict>
</plist>
```

That is, update template path in `Program` tag to actual path where the cluster service exists.

```
<?xml version="1.0" encoding="UTF-8"?>
<plist version="1.0">
  <dict>
    <key>Label</key>
    <string>shanshu.copt.cluster</string>
    <key>Program</key>
    <string>/Applications/copt_remote60/cluster/copt_cluster</string>
    <key>RunAtLoad</key>
    <true/>
    <key>KeepAlive</key>
    <true/>
  </dict>
</plist>
```

Afterwards, copy `copt_cluster.plist` to system service folder `/Library/LaunchAgents` (see below).

```
sudo cp copt_cluster.plist /Library/LaunchAgents
```

The following command starts the new cluster service.

```
sudo launchctl load -w /Library/LaunchAgents/copt_cluster.plist
```

To verify the cluster service is actually running, type the following command

```
sudo launchctl list shanshu.copt.cluster
```

If you see logs similar to below, COPT compute cluster server is running successfully as a system service.

```
{
  "LimitLoadToSessionType" = "System";
  "Label" = "shanshu.copt.cluster";
  "OnDemand" = false;
  "LastExitStatus" = 0;
  "PID" = 16406;
  "Program" = "/Applications/copt_remote60/cluster/copt_cluster";
};
```

To stop the cluster service, type the following command

```
sudo launchctl unload -w /Library/LaunchAgents/copt_cluster.plist
```

If the cluster service should be run by a specific user, add `UserName` tag to config file. Below adds a user `eleven`, who has privilege to run the cluster service.

```
<?xml version="1.0" encoding="UTF-8"?>
<plist version="1.0">
  <dict>
    <key>Label</key>
    <string>shanshu.copt.cluster</string>
    <key>Program</key>
    <string>/Applications/copt_remote60/cluster/copt_cluster</string>
    <key>UserName</key>
    <string>eleven</string>
    <key>RunAtLoad</key>
    <true/>
    <key>KeepAlive</key>
    <true/>
  </dict>
</plist>
```

Then copy new `copt_cluster.plist` to system service folder `/Library/LaunchDaemons` (see below).

```
sudo cp copt_cluster.plist /Library/LaunchDaemons
```

The following command starts the new cluster service.

```
sudo launchctl load -w /Library/LaunchDaemons/copt_cluster.plist
```

To stop the cluster service, type the following command

```
sudo launchctl unload -w /Library/LaunchDaemons/copt_cluster.plist
```

## Chapter 6

# COPT Quick Start

### 6.1 C Interface

This chapter illustrates the use of C interface of Cardinal Optimizer through a simple C example. The problem to solve is shown in Eq. 6.1:

$$\begin{aligned} &\text{Maximize:} \\ &\quad 1.2x + 1.8y + 2.1z \\ &\text{Subject to:} \\ &\quad 1.5x + 1.2y + 1.8z \leq 2.6 \\ &\quad 0.8x + 0.6y + 0.9z \geq 1.2 \\ &\text{Bounds:} \\ &\quad 0.1 \leq x \leq 0.6 \\ &\quad 0.2 \leq y \leq 1.5 \\ &\quad 0.3 \leq z \leq 2.8 \end{aligned} \tag{6.1}$$

#### 6.1.1 Example details

The source code for solving the above problem using C API of Cardinal Optimizer is shown in Listing 6.1:

Listing 6.1: lp\_ex1.c

```
1  /*
2   * This file is part of the Cardinal Optimizer, all rights reserved.
3   */
4
5  // The problem to solve:
6  //
7  // Maximize:
8  //   1.2 x + 1.8 y + 2.1 z
9  //
10 // Subject to:
11 //   1.5 x + 1.2 y + 1.8 z <= 2.6
12 //   0.8 x + 0.6 y + 0.9 z >= 1.2
13 //
14 // where:
15 //   0.1 <= x <= 0.6
16 //   0.2 <= y <= 1.5
17 //   0.3 <= z <= 2.8
```

(continues on next page)

(continued from previous page)

```

18
19 #include "copt.h"
20
21 #include <stdio.h>
22 #include <stdlib.h>
23
24 int main(int argc, char *argv[]) {
25     int errcode = 0;
26
27     copt_env *env = NULL;
28     copt_prob *prob = NULL;
29
30     // Create COPT environment
31     errcode = COPT_CreateEnv(&env);
32     if (errcode) goto COPT_EXIT;
33
34     // Create COPT problem
35     errcode = COPT_CreateProb(env, &prob);
36     if (errcode) goto COPT_EXIT;
37
38     // Add variables
39     //
40     //   obj: 1.2 C0 + 1.8 C1 + 2.1 C2
41     //
42     //   var:
43     //       0.1 <= C0 <= 0.6
44     //       0.2 <= C1 <= 1.5
45     //       0.3 <= C2 <= 2.8
46     //
47     int ncol = 3;
48     double colcost[] = {1.2, 1.8, 2.1};
49     double collb[] = {0.1, 0.2, 0.3};
50     double colub[] = {0.6, 1.5, 1.8};
51
52     errcode = COPT_AddCols(prob, ncol, colcost, NULL, NULL, NULL, NULL,
53                          NULL, collb, colub, NULL);
54     if (errcode) goto COPT_EXIT;
55
56     // Add constraints
57     //
58     //   r0: 1.5 C0 + 1.2 C1 + 1.8 C2 <= 2.6
59     //   r1: 0.8 C0 + 0.6 C1 + 0.9 C2 >= 1.2
60     //
61     int nrow = 2;
62     int rowbeg[] = {0, 3};
63     int rowcnt[] = {3, 3};
64     int rowind[] = {0, 1, 2, 0, 1, 2};
65     double rowelem[] = {1.5, 1.2, 1.8, 0.8, 0.6, 0.9};
66     char rowsen[] = {COPT_LESS_EQUAL, COPT_GREATER_EQUAL};
67     double rowrhs[] = {2.6, 1.2};
68
69     errcode = COPT_AddRows(prob, nrow, rowbeg, rowcnt, rowind, rowelem,
70                          rowsen, rowrhs, NULL, NULL);
71     if (errcode) goto COPT_EXIT;
72
73     // Set parameters and attributes
74     errcode = COPT_SetDbiParam(prob, COPT_DBLPARAM_TIMELIMIT, 10);
75     if (errcode) goto COPT_EXIT;
76     errcode = COPT_SetObjSense(prob, COPT_MAXIMIZE);
77     if (errcode) goto COPT_EXIT;
78

```

(continues on next page)

(continued from previous page)

```

79 // Solve problem
80 errcode = COPT_SolveLp(prob);
81 if (errcode) goto COPT_EXIT;
82
83 // Analyze solution
84 int lpstat = COPT_LPSTATUS_UNSTARTED;
85 double lpobjval;
86 double *lpsol = NULL;
87 int *colstat = NULL;
88
89 errcode = COPT_GetIntAttr(prob, COPT_INTATTR_LPSTATUS, &lpstat);
90 if (errcode) goto COPT_EXIT;
91
92 if (lpstat == COPT_LPSTATUS_OPTIMAL) {
93     lpsol = (double *) malloc(ncol * sizeof(double));
94     colstat = (int *) malloc(ncol * sizeof(int));
95
96     errcode = COPT_GetLpSolution(prob, lpsol, NULL, NULL, NULL);
97     if (errcode) goto COPT_EXIT;
98
99     errcode = COPT_GetBasis(prob, colstat, NULL);
100    if (errcode) goto COPT_EXIT;
101
102    errcode = COPT_GetDblAttr(prob, COPT_DBLATTR_LPOBJVAL, &lpobjval);
103    if (errcode) goto COPT_EXIT;
104
105    printf("\nObjective value: %.6f\n", lpobjval);
106
107    printf("Variable solution: \n");
108    for (int i = 0; i < ncol; ++i)
109        printf("  x[%d] = %.6f\n", i, lpsol[i]);
110
111    printf("Variable basis status: \n");
112    for (int i = 0; i < ncol; ++i)
113        printf("  x[%d]: %d\n", i, colstat[i]);
114
115    free(lpsol);
116    free(colstat);
117 }
118
119 // Write problem, solution and modified parameters to files
120 errcode = COPT_WriteMps(prob, "lp_ex1.mps");
121 if (errcode) goto COPT_EXIT;
122 errcode = COPT_WriteBasis(prob, "lp_ex1.bas");
123 if (errcode) goto COPT_EXIT;
124 errcode = COPT_WriteSol(prob, "lp_ex1.sol");
125 if (errcode) goto COPT_EXIT;
126 errcode = COPT_WriteParam(prob, "lp_ex1.par");
127 if (errcode) goto COPT_EXIT;
128
129 // Error handling
130 COPT_EXIT:
131 if (errcode) {
132     char errmsg[COPT_BUFFSIZE];
133
134     COPT_GetRetcodeMsg(errcode, errmsg, COPT_BUFFSIZE);
135     printf("ERROR %d: %s\n", errcode, errmsg);
136
137     return 0;
138 }
139

```

(continues on next page)



(continued from previous page)

```

140 // Delete problem and environment
141 COPT_DeleteProb(&prob);
142
143 COPT_DeleteEnv(&env);
144
145 return 0;
146 }

```

We will explain how to use the C API step by step based on code above, please refer to [C API Reference](#) for detailed usage of C API.

#### 6.1.1.1 Creating the environment

To solve any problem with Cardinal Optimizer, users are required to create optimization environment first, and check if it was created successfully by checking the return value:

```

// Create COPT environment
errcode = COPT_CreateEnv(&env);
if (errcode) goto COPT_EXIT;

```

If non-zero value was returned, it will jump to error reporting code block for detailed information and exit.

#### 6.1.1.2 Creating the problem

Once the optimization environment was successfully created, users will need to create problem then, the problem is the main structure that consists of variables, constraints etc. Users need to check the return value too.

```

// Create COPT problem
errcode = COPT_CreateProb(env, &prob);
if (errcode) goto COPT_EXIT;

```

If non-zero value was returned, it will jump to error reporting code block for detailed information and exit.

#### 6.1.1.3 Adding variables

For linear problem, C API allows users to specify costs of variables in objective, and lower and upper bound simultaneously. For the problem above, we use code below to create variables:

```

// Add variables
//
// obj: 1.2 C0 + 1.8 C1 + 2.1 C2
//
// var:
// 0.1 <= C0 <= 0.6
// 0.2 <= C1 <= 1.5
// 0.3 <= C2 <= 2.8
//
int ncol = 3;
double colcost[] = {1.2, 1.8, 2.1};
double collb[] = {0.1, 0.2, 0.3};
double colub[] = {0.6, 1.5, 1.8};

errcode = COPT_AddCols(prob, ncol, colcost, NULL, NULL, NULL, NULL,
                        NULL, collb, colub, NULL);
if (errcode) goto COPT_EXIT;

```

The argument `ncol` specify that the number of variables to create is 3, while the argument `colcost`, `collb` and `colub` specify the costs in objective, lower and upper bound respectively. Regarding other arguments of `COPT_AddCols` for specifying variables types and names, we just pass `NULL` to them, which means all variables are continuous and names are automatically generated by the Cardinal Optimizer. For the remaining arguments, we passed `NULL` too for further action.

Similarly, if non-zero value was returned, it will jump to error reporting code block for detailed information and exit.

#### 6.1.1.4 Adding constraints

The next step to do after adding variables successfully is to add constraints to problem. For the problem above, the implementation is shown below:

```
// Add constraints
//
//   r0: 1.5 C0 + 1.2 C1 + 1.8 C2 <= 2.6
//   r1: 0.8 C0 + 0.6 C1 + 0.9 C2 >= 1.2
//
int nrow = 2;
int rowbeg[] = {0, 3};
int rowcnt[] = {3, 3};
int rowind[] = {0, 1, 2, 0, 1, 2};
double rowelem[] = {1.5, 1.2, 1.8, 0.8, 0.6, 0.9};
char rowsen[] = {COPT_LESS_EQUAL, COPT_GREATER_EQUAL};
double rowrhs[] = {2.6, 1.2};

errcode = COPT_AddRows(prob, nrow, rowbeg, rowcnt, rowind, rowelem,
                      rowsen, rowrhs, NULL, NULL);
if (errcode) goto COPT_EXIT;
```

The argument `nrow` specifies that the number of constraints to create is 2, while argument `rowbeg`, `rowcnt`, `rowind` and `rowelem` define the coefficient matrix in CSR format. The argument `rowsen` represents the sense of constraints, while argument `rowrhs` specifies the right hand side of constraints. For remaining arguments in `COPT_AddRows`, we simply pass `NULL` to them.

If the return value is non-zero, then it jump to error reporting code block for detailed information and exit.

#### 6.1.1.5 Setting parameters and attributes

Users are allowed to set parameters and attributes of problem before solving. For example, to set the time limit to 10 seconds, and to set the optimization direction to maximization, the code is shown below:

```
// Set parameters and attributes
errcode = COPT_SetDbiParam(prob, COPT_DBLPARAM_TIMELIMIT, 10);
if (errcode) goto COPT_EXIT;
errcode = COPT_SetObjSense(prob, COPT_MAXIMIZE);
if (errcode) goto COPT_EXIT;
```

If non-zero value was returned, then it will jump to error reporting code block for detailed information and exit.

#### 6.1.1.6 Solve the problem

The next step to do is to solve the problem using code below:

```
// Solve problem
errcode = COPT_SolveLp(prob);
if (errcode) goto COPT_EXIT;
```

Non-zero return value indicates unsuccessful solve and jump to error reporting code block for detailed information and exit.

#### 6.1.1.7 Analyze the solution

Once the solving process was finished, check the solution status first. If it claimed to have found the optimal solution, then use code below to obtain objective value, variables' solution and basis status:

```
// Analyze solution
int lpstat = COPT_LPSTATUS_UNSTARTED;
double lpobjval;
double *lpsol = NULL;
int *colstat = NULL;

errcode = COPT_GetIntAttr(prob, COPT_INTATTR_LPSTATUS, &lpstat);
if (errcode) goto COPT_EXIT;

if (lpstat == COPT_LPSTATUS_OPTIMAL) {
    lpsol = (double *) malloc(ncol * sizeof(double));
    colstat = (int *) malloc(ncol * sizeof(int));

    errcode = COPT_GetLpSolution(prob, lpsol, NULL, NULL, NULL);
    if (errcode) goto COPT_EXIT;

    errcode = COPT_GetBasis(prob, colstat, NULL);
    if (errcode) goto COPT_EXIT;

    errcode = COPT_GetDblAttr(prob, COPT_DBLATTR_LPOBJVAL, &lpobjval);
    if (errcode) goto COPT_EXIT;

    printf("\nObjective value: %.6f\n", lpobjval);

    printf("Variable solution: \n");
    for (int i = 0; i < ncol; ++i)
        printf("  x[%d] = %.6f\n", i, lpsol[i]);

    printf("Variable basis status: \n");
    for (int i = 0; i < ncol; ++i)
        printf("  x[%d]: %d\n", i, colstat[i]);

    free(lpsol);
    free(colstat);
}
```

#### 6.1.1.8 Write problem and solution

Users are allowed not only to save the problem to solve to standard MPS file, but also the solution, basis status and modified parameters to files:

```
// Write problem, solution and modified parameters to files
errcode = COPT_WriteMps(prob, "lp_ex1.mps");
if (errcode) goto COPT_EXIT;
errcode = COPT_WriteBasis(prob, "lp_ex1.bas");
if (errcode) goto COPT_EXIT;
errcode = COPT_WriteSol(prob, "lp_ex1.sol");
if (errcode) goto COPT_EXIT;
errcode = COPT_WriteParam(prob, "lp_ex1.par");
if (errcode) goto COPT_EXIT;
```

#### 6.1.1.9 Error handling

The error handling block report error code and message by checking if the return value was non-zero:

```
// Error handling
COPT_EXIT:
if (errcode) {
    char errmsg[COPT_BUFFSIZE];

    COPT_GetRetcodeMsg(errcode, errmsg, COPT_BUFFSIZE);
    printf("ERROR %d: %s\n", errcode, errmsg);

    return 0;
}
```

#### 6.1.1.10 Delete environment and problem

Before exiting, delete problem and environment respectively:

```
// Delete problem and environment
COPT_DeleteProb(&prob);

COPT_DeleteEnv(&env);
```

### 6.1.2 Build and run

To ease the work for running the example for users on different operating systems, we provide Visual Studio project and Makefile for Windows, Linux and MacOS respectively, details are shown below.

#### 6.1.2.1 Windows

For users on Windows platform, we provide Visual Studio project, all users are required to install Visual Studio 2017 beforehand. Assume that the installation directory is: '<instdir>', users that install the Cardinal Optimizer with executable installer can change directory to '<instdir>\examples\c\vsprojects' and open the Visual Studio project lp\_ex1.vcxproj to build the solution. Users that install the Cardinal Optimizer using ZIP-format archive should make sure that all required environment variables are set correctly, see *Install Guide for Cardinal Optimizer* for details.

### 6.1.2.2 Linux and MacOS

For users on Linux or MacOS, we provide Makefile to build the example. Please install GCC toolchain for Linux and Clang toolchain for MacOS, together with the `make` utility beforehand. What's more, users should make sure also that all required environment variables are set correctly, see [Install Guide for Cardinal Optimizer](#) for details. Let's assume that the installation directory of Cardinal Optimizer is '`<instdir>`', then users need to change directory to '`<instdir>\examples\c`' and execute command `make` in terminal.

## 6.2 C++ Interface

This chapter walks through a simple C++ example to illustrate the use of the COPT C++ interface. In short words, the example creates an environment, builds a model, add variables and constraints, optimizes it, and then outputs the optimal objective value.

The example solves the following linear problem:

$$\begin{aligned} &\text{Maximize:} \\ &\quad 1.2x + 1.8y + 2.1z \\ &\text{Subject to:} \\ &\quad 1.5x + 1.2y + 1.8z \leq 2.6 \\ &\quad 0.8x + 0.6y + 0.9z \geq 1.2 \\ &\text{Bounds:} \\ &\quad 0.1 \leq x \leq 0.6 \\ &\quad 0.2 \leq y \leq 1.5 \\ &\quad 0.3 \leq z \leq 2.8 \end{aligned} \tag{6.2}$$

Note that this is the same problem that was modelled and optimized in chapter of [C Interface](#).

### 6.2.1 Example details

Below is the source code solving the above problem using COPT C++ interface.

Listing 6.2: `lp_ex1.cpp`

```
1  /*
2   * This file is part of the Cardinal Optimizer, all rights reserved.
3   */
4  #include "coptcpp_pch.h"
5
6  using namespace std;
7
8  // The problem to solve:
9  //
10 // Maximize:
11 //    1.2 x + 1.8 y + 2.1 z
12 //
13 // Subject to:
14 //    1.5 x + 1.2 y + 1.8 z <= 2.6
15 //    0.8 x + 0.6 y + 0.9 z >= 1.2
16 //
17 // where:
18 //    0.1 <= x <= 0.6
19 //    0.2 <= y <= 1.5
20 //    0.3 <= z <= 2.8
21 int main(int argc, char *argv[])
```

(continues on next page)

(continued from previous page)

```

22 {
23     try
24     {
25         Env env;
26         Model model = env.CreateModel("lp_ex1");
27
28         // Add variables
29         //
30         //   obj: 1.2 x + 1.8 y + 2.1 z
31         //
32         //   var:
33         //       0.1 <= x <= 0.6
34         //       0.2 <= y <= 1.5
35         //       0.3 <= z <= 2.8
36         //
37         Var x = model.AddVar(0.1, 0.6, 0.0, COPT_CONTINUOUS, "x");
38         Var y = model.AddVar(0.2, 1.5, 0.0, COPT_CONTINUOUS, "y");
39         Var z = model.AddVar(0.3, 2.8, 0.0, COPT_CONTINUOUS, "z");
40
41         model.SetObjective(1.2 * x + 1.8 * y + 2.1 * z, COPT_MAXIMIZE);
42
43         // Add new constraints using linear expression
44         //
45         //   r0: 1.5 x + 1.2 y + 1.8 z <= 2.6
46         //   r1: 0.8 x + 0.6 y + 0.9 z >= 1.2
47         //
48         model.AddConstr(1.5 * x + 1.2 * y + 1.8 * z <= 2.6, "r0");
49
50         Expr expr(x, 0.8);
51         expr.AddTerm(y, 0.6);
52         expr += 0.9 * z;
53         model.AddConstr(expr >= 1.2, "r1");
54
55         // Set parameters
56         model.SetDblParam(COPT_DBLPARAM_TIMELIMIT, 10);
57
58         // Solve problem
59         model.Solve();
60
61         // Output solution
62         if (model.GetIntAttr(COPT_INTATTR_HASLPSOL) != 0)
63         {
64             cout << "\nFound optimal solution:" << endl;
65             VarArray vars = model.GetVars();
66             for (int i = 0; i < vars.Size(); i++)
67             {
68                 Var var = vars.GetVar(i);
69                 cout << "   " << var.GetName() << " = " << var.Get(COPT_DBLINFO_VALUE) << endl;
70             }
71             cout << "Obj = " << model.GetDblAttr(COPT_DBLATTR_LPOBJVAL) << endl;
72         }
73     }
74     catch (CoptException e)
75     {
76         cout << "Error Code = " << e.GetCode() << endl;
77         cout << e.what() << endl;
78     }
79     catch (...)
80     {
81         cout << "Unknown exception occurs!";
82     }

```

(continues on next page)

}

Let's now walk through the example, line by line, to understand how it achieves the desired result of optimizing the model. Note that the example must include header `coptcpp_pch.h`.

### 6.2.1.1 Creating environment and model

Essentially, any C++ application using Cardinal Optimizer should start with a COPT environment, where user could add one or more models. Note that each model encapsulates a problem and corresponding data.

Furthermore, to create multiple problems, one can load them one by one in the same model, besides the naive option of creating multiple models in the environment.

```
Envr env;
Model model = env.CreateModel("lp_ex1");
```

The above call instantiates a COPT environment and a model with name "lp\_ex1".

### 6.2.1.2 Adding variables

The next step in our example is to add variables to the model. Variables are added through `AddVar()` or `AddVars()` method on the model object. A variable is always associated with a particular model.

```
// Add variables
//
//  obj: 1.2 x + 1.8 y + 2.1 z
//
//  var:
//    0.1 <= x <= 0.6
//    0.2 <= y <= 1.5
//    0.3 <= z <= 2.8
//
Var x = model.AddVar(0.1, 0.6, 0.0, COPT_CONTINUOUS, "x");
Var y = model.AddVar(0.2, 1.5, 0.0, COPT_CONTINUOUS, "y");
Var z = model.AddVar(0.3, 2.8, 0.0, COPT_CONTINUOUS, "z");

model.SetObjective(1.2 * x + 1.8 * y + 2.1 * z, COPT_MAXIMIZE);
```

The first and second arguments to the `AddVar()` call are the variable lower and upper bounds, respectively. The third argument is the linear objective coefficient (zero here - we'll set the objective later). The fourth argument is the variable type. Our variables are all continuous in this example. The final argument is the name of the variable.

The `AddVar()` method has been overloaded to accept several different argument lists. Please refer to [C++ API Reference](#) for further details.

The objective is built here using overloaded operators. The C++ API overloads the arithmetic operators to allow you to build linear expressions by COPT variables. The second argument indicates that the sense is maximization.

### 6.2.1.3 Adding constraints

The next step in the example is to add the linear constraints. As with variables, constraints are always associated with a specific model. They are created using `AddConstr()` or `AddConstrs()` methods on the model object.

```
// Add new constraints using linear expression
//
//   r0: 1.5 x + 1.2 y + 1.8 z <= 2.6
//   r1: 0.8 x + 0.6 y + 0.9 z >= 1.2
//
model.AddConstr(1.5 * x + 1.2 * y + 1.8 * z <= 2.6, "r0");

Expr expr(x, 0.8);
expr.AddTerm(y, 0.6);
expr += 0.9 * z;
model.AddConstr(expr >= 1.2, "r1");
```

The first constraint is to use overloaded arithmetic operators to build the linear expression. The comparison operators are also overloaded to make it easier to build constraints.

The second constraint is created by building a linear expression incrementally. That is, an expression can be built by constructor of a variable and its coefficient, by `AddTerm()` method, and by overloaded operators.

### 6.2.1.4 Setting parameters and attributes

The next step in the example is to set parameters and attributes of the problem before optimization.

```
// Set parameters
model.SetDbiParam(COPT_DBLPARAM_TIMELIMIT, 10);
```

The `SetDbiParam()` call here with `COPT_DBLPARAM_TIMELIMIT` argument sets solver to optimize up to 10 seconds.

### 6.2.1.5 Solving problem

Now that the model has been built, the next step is to optimize it:

```
// Solve problem
model.Solve();
```

This routine performs the optimization and populates several internal model attributes (including the status of the optimization, the solution, etc.).

### 6.2.1.6 Outputting solution

After solving the problem, one can query the values of the attributes for various of purposes.

```
// Output solution
if (model.GetIntAttr(COPT_INTATTR_HASLPSOL) != 0)
{
    cout << "\nFound optimal solution:" << endl;
    VarArray vars = model.GetVars();
    for (int i = 0; i < vars.Size(); i++)
    {
        Var var = vars.GetVar(i);
        cout << "  " << var.GetName() << " = " << var.Get(COPT_DBLINFO_VALUE) << endl;
    }
}
```

(continues on next page)



(continued from previous page)

```
    }  
    cout << "Obj = " << model.GetDbAttr(COPT_DBLATTR_LPOBJVAL) << endl;  
}
```

Specifically, one can query the COPT\_INTATTR\_HASLPSOL attribute on the model to know whether we have optimal LP solution; query the COPT\_DBLINFO\_VALUE attribute of a variable to obtain its solution value; query the COPT\_DBLATTR\_LPOBJVAL attribute on the model to obtain the objective value for the current solution.

The names and types of all model, variable, and constraint attributes can be found in [Attributes](#) of C API reference.

### 6.2.1.7 Error handling

Errors in the COPT C++ interface are handled through the C++ exception mechanism. In the example, all COPT statements are enclosed inside a try block, and any associated errors would be caught by the catch block.

```
catch (CoptException e)  
{  
    cout << "Error Code = " << e.GetCode() << endl;  
    cout << e.what() << endl;  
}  
catch (...)  
{  
    cout << "Unknown exception occurs!";  
}
```

## 6.2.2 Build and Run

To build and run the example, users may refer to files under \$COPT\_HOME/examples/cpp. Specifically, We provide visual studio project on Windows, as well as makefile project on Linux and Mac platforms.

### 6.2.2.1 Windows Visual Studio project

For Windows platform, Visual Studio project is located at \$COPT\_HOME/examples/cpp/vsprojects. Double-clicking the project file lp\_ex1.vcxproj will bring Visual Studio. Note that it requires Visual studio 2017 or 2019 installed on Windows 10 to build.

The Visual Studio project has dependency on COPT cpp shared library `copt_cpp.dll`, which is referred in project file, along with its import library `copt_cpp.lib`. The required headers are `copt.h`, `coptcpp.h` and `coptcpp.idl.h`, which declare COPT constants, interfaces and methods exported from `copt_cpp.dll`. In addition, the example provides class header files under \$COPT\_HOME/include/coptcpp\_inc, which wraps COPT cpp interfaces and redefines overloaded operators. For simplicity, user should include `coptcpp_pch.h` to start with, as shown in the example.

To run the example, users should have COPT installed. Specifically, it requires COPT cpp library, `copt_cpp.dll`, and valid license files to run. Please refer to [Install Guide for Cardinal Optimizer](#) for further details.

It is **IMPORTANT** to notice that COPT cpp shared library, `copt_cpp.dll`, is not compatible with gcc compiler on Windows. That is, if you are running this example on Windows, the executable compiled by gcc will not work as expected. This is because GCC is not compabile with Windows SDK. On the other hand, both Clang and Intel compiler work fine, as well as MSVC.

### 6.2.2.2 Makefile project

We provide Makefile to build the example for Linux and MacOS platforms. Please make sure tools, `gcc` and `make`, are already installed on the platforms. To build the example, change directory to `$COPT_HOME/examples/cpp` and execute command '`make`' on unix terminal.

The project has dependency on COPT cpp shared library, that is, `libcopt_cpp.so` on Linux platform and `libcopt_cpp.dylib` on MacOS. Similar to Windows VS project, user should refer to `coptcpp_pch.h` under `$COPT_HOME/include/coptcpp_inc` to include all necessary headers, as shown in the example.

To run the example, users should have COPT installed. Specifically, it requires COPT cpp library, `libcopt_cpp.so` on Linux, `libcopt_cpp.dylib` on MacOS, and valid license files to run. Alternatively, user might set `LD_LIBRARY_PATH` and `COPT_LICENSE_DIR` properly to work around. Please refer to [Install Guide for Cardinal Optimizer](#) for further details.

## 6.3 C# Interface

This chapter walks through a simple C# example to illustrate the use of the COPT C# interface. In short words, the example creates an environment, builds a model, add variables and constraints, optimizes it, and then outputs the optimal objective value.

The example solves the following linear problem:

$$\begin{aligned}
 &\text{Maximize:} \\
 &\quad 1.2x + 1.8y + 2.1z \\
 &\text{Subject to:} \\
 &\quad 1.5x + 1.2y + 1.8z \leq 2.6 \\
 &\quad 0.8x + 0.6y + 0.9z \geq 1.2 \\
 &\text{Bounds:} \\
 &\quad 0.1 \leq x \leq 0.6 \\
 &\quad 0.2 \leq y \leq 1.5 \\
 &\quad 0.3 \leq z \leq 2.8
 \end{aligned} \tag{6.3}$$

Note that this is the same problem that was modelled and optimized in chapter of [C Interface](#).

### 6.3.1 Example details

Below is the source code solving the above problem using COPT C# interface.

Listing 6.3: `lp_ex1.cs`

```

1  /*
2   * This file is part of the Cardinal Optimizer, all rights reserved.
3   */
4  using Copt;
5  using System;
6
7  // The problem to solve:
8  //
9  // Maximize:
10 // 1.2 x + 1.8 y + 2.1 z
11 //
12 // Subject to:
13 // 1.5 x + 1.2 y + 1.8 z <= 2.6
14 // 0.8 x + 0.6 y + 0.9 z >= 1.2
15 //

```

(continues on next page)

(continued from previous page)

```

16 // where:
17 //    0.1 <= x <= 0.6
18 //    0.2 <= y <= 1.5
19 //    0.3 <= z <= 2.8
20 public class lp_ex1
21 {
22     public static void Main()
23     {
24         try
25         {
26             Envr env = new Envr();
27             Model model = env.CreateModel("lp_ex1");
28
29             // Add variables
30             //
31             //    obj: 1.2 x + 1.8 y + 2.1 z
32             //
33             //    var:
34             //    0.1 <= x <= 0.6
35             //    0.2 <= y <= 1.5
36             //    0.3 <= z <= 2.8
37             //
38             Var x = model.AddVar(0.1, 0.6, 0.0, Copt.Consts.CONTINUOUS, "x");
39             Var y = model.AddVar(0.2, 1.5, 0.0, Copt.Consts.CONTINUOUS, "y");
40             Var z = model.AddVar(0.3, 2.8, 0.0, Copt.Consts.CONTINUOUS, "z");
41
42             model.SetObjective(1.2 * x + 1.8 * y + 2.1 * z, Copt.Consts.MAXIMIZE);
43
44             // Add new constraints using linear expression
45             //
46             //    r0: 1.5 x + 1.2 y + 1.8 z <= 2.6
47             //    r1: 0.8 x + 0.6 y + 0.9 z >= 1.2
48             //
49             model.AddConstr(1.5 * x + 1.2 * y + 1.8 * z <= 2.6, "r0");
50
51             Expr expr = new Expr(x, 0.8);
52             expr.AddTerm(y, 0.6);
53             expr += 0.9 * z;
54             model.AddConstr(expr >= 1.2, "r1");
55
56             // Set parameters
57             model.SetDblParam(Copt.DblParam.TimeLimit, 10);
58
59             // Solve problem
60             model.Solve();
61
62             // Output solution
63             if (model.GetIntAttr(Copt.IntAttr.LpStatus) == Copt.Status.OPTIMAL)
64             {
65                 Console.WriteLine("\nFound optimal solution:");
66                 VarArray vars = model.GetVars();
67                 for (int i = 0; i < vars.Size(); i++)
68                 {
69                     Var var = vars.GetVar(i);
70                     Console.WriteLine("  {0} = {1}", var.GetName(),
71                                     var.Get(Copt.DblInfo.Value));
72                 }
73                 Console.WriteLine("Obj = {0}", model.GetDblAttr(Copt.DblAttr.LpObjVal));
74             }
75             Console.WriteLine("\nDone");
76         }
77     }

```

(continues on next page)

(continued from previous page)

```

77     catch (CoptException e)
78     {
79         Console.WriteLine("Error Code = {0}", e.GetCode());
80         Console.WriteLine(e.Message);
81     }
82 }
83 }

```

Let's now walk through the example, line by line, to understand how it achieves the desired result of optimizing the model.

### 6.3.1.1 Creating environment and model

Essentially, any C# application using Cardinal Optimizer should start with a COPT environment, where user could add one or more models. Note that each model encapsulates a problem and corresponding data.

Furthermore, to create multiple problems, one can load them one by one in the same model, besides the naive option of creating multiple models in the environment.

```

Envr env = new Envr();
Model model = env.CreateModel("lp_ex1");

```

The above call instantiates a COPT environment and a model with name "lp\_ex1".

### 6.3.1.2 Adding variables

The next step in our example is to add variables to the model. Variables are added through AddVar() or AddVars() method on the model object. A variable is always associated with a particular model.

```

// Add variables
//
//   obj: 1.2 x + 1.8 y + 2.1 z
//
//   var:
//       0.1 <= x <= 0.6
//       0.2 <= y <= 1.5
//       0.3 <= z <= 2.8
//
Var x = model.AddVar(0.1, 0.6, 0.0, Copt.Consts.CONTINUOUS, "x");
Var y = model.AddVar(0.2, 1.5, 0.0, Copt.Consts.CONTINUOUS, "y");
Var z = model.AddVar(0.3, 2.8, 0.0, Copt.Consts.CONTINUOUS, "z");

model.SetObjective(1.2 * x + 1.8 * y + 2.1 * z, Copt.Consts.MAXIMIZE);

```

The first and second arguments to the AddVar() call are the variable lower and upper bounds, respectively. The third argument is the linear objective coefficient (zero here - we'll set the objective later). The fourth argument is the variable type. Our variables are all continuous in this example. The final argument is the name of the variable.

The AddVar() method has been overloaded to accept several different argument lists. Please refer to chapCSharpApiRef\_Class of C# API reference for further details.

The objective is built here using overloaded operators. The C# API overloads the arithmetic operators to allow you to build linear expressions by COPT variables. The second argument indicates that the sense is maximization.

### 6.3.1.3 Adding constraints

The next step in the example is to add the linear constraints. As with variables, constraints are always associated with a specific model. They are created using `AddConstr()` or `AddConstrs()` methods on the model object.

```
// Add new constraints using linear expression
//
//  r0: 1.5 x + 1.2 y + 1.8 z <= 2.6
//  r1: 0.8 x + 0.6 y + 0.9 z >= 1.2
//
model.AddConstr(1.5 * x + 1.2 * y + 1.8 * z <= 2.6, "r0");

Expr expr = new Expr(x, 0.8);
expr.AddTerm(y, 0.6);
expr += 0.9 * z;
model.AddConstr(expr >= 1.2, "r1");
```

The first constraint is to use overloaded arithmetic operators to build the linear expression. The comparison operators are also overloaded to make it easier to build constraints.

The second constraint is created by building a linear expression incrementally. That is, an expression can be built by constructor of a variable and its coefficient, by `AddTerm()`, and by overloaded operators.

### 6.3.1.4 Setting parameters and attributes

The next step in the example is to set parameters and attributes of the problem before optimization.

```
// Set parameters
model.SetDbiParam(Copt.DblParam.TimeLimit, 10);
```

The `SetDbiParam()` call here with `Copt.DblParam.TimeLimit` argument sets solver to optimize up to 10 seconds.

### 6.3.1.5 Solving problem

Now that the model has been built, the next step is to optimize it:

```
// Solve problem
model.Solve();
```

This routine performs the optimization and populates several internal model attributes (including the status of the optimization, the solution, etc.).

### 6.3.1.6 Outputting solution

After solving the problem, one can query the values of the attributes for various of purposes.

```
// Output solution
if (model.GetIntAttr(Copt.IntAttr.LpStatus) == Copt.Status.OPTIMAL)
{
    Console.WriteLine("\nFound optimal solution:");
    VarArray vars = model.GetVars();
    for (int i = 0; i < vars.Size(); i++)
    {
        Var var = vars.GetVar(i);
        Console.WriteLine("  {0} = {1}", var.GetName(),
                           var.Get(Copt.DblInfo.Value));
    }
}
```

(continues on next page)

(continued from previous page)

```

        Console.WriteLine("Obj = {0}", model.GetDblAttr(Copt.DblAttr.LpObjVal));
    }
    Console.WriteLine("\nDone");

```

Specifically, one can query the `Copt.IntAttr.LpStatus` attribute of the model to determine whether we have found optimal LP solution; query the `Copt.DblInfo.Value` attribute of a variable to obtain its solution value; query the `Copt.DblAttr.LpObjVal` attribute on the model to obtain the objective value for the current solution.

The names and types of all model, variable, and constraint attributes can be found in *Constants* of C# API reference.

### 6.3.1.7 Error handling

Errors in the COPT C# interface are handled through the C# exception mechanism. In the example, all COPT statements are enclosed inside a try block, and any associated errors would be caught by the catch block.

```

        Console.WriteLine("Error Code = {0}", e.GetCode());
        Console.WriteLine(e.Message);
    }
}
}

```

## 6.3.2 Build and Run

To build and run csharp example, users may refer to project under `$COPT_HOME/examples/csharp`. Specifically, We provide a csharp project file in cross-platform framework of dotnet core 2.0. This example shows a single project working on Windows, as well as Linux and Mac platforms.

First of all, download and install [dotnet core 2.0](#) on your platform. To get started, follow [instructions](#) in the dotnet core docs.

### 6.3.2.1 Dotnet core 2.0 project

The dotnet core 2.0 project file `example.csproj` example locates in folder `$COPT_HOME/examples/csharp/dotnetprojects`. Copy example file `lp_ex1.cs` to this folder and change directory to there by Windows command line prompt, then run with command `'dotnet run --framework netcoreapp2.0'`. For users of dotnet core 3.0, just run with `'dotnet run --framework netcoreapp3.0'` instead will work too.

This csharp project has dependency on COPT dotnet 2.0 shared library `copt_dotnet20.dll`, which is referred in the project file and defines all managed classes of COPT solver. In addition, `copt_dotnet20.dll` loads two shared libraries, that is, `coptcswrap.dll` and `copt_cpp.dll` on Windows, `libcoptcswrap.so` and `libcopt_cpp.so` on Linux, `libcoptcswrap.dylib` and `libcopt_cpp.dylib` on Mac respectively. Note that `coptcswrap` library is a bridge between managed COPT library and native library `copt_cpp.dll`, which declares and implements COPT constants, interfaces and methods. So users should make sure they are installed properly on runtime search paths.

In summary, to run csharp example, users should have COPT installed properly. Specifically, it requires three related COPT shared libraries existing on runtime search paths, and valid license files to run. Please refer to *Install Guide for Cardinal Optimizer* for further details.

## 6.4 Java Interface

This chapter walks through a simple Java example to illustrate the use of the COPT Java interface. In short words, the example creates an environment, builds a model, add variables and constraints, optimizes it, and then outputs the optimal objective value.

The example solves the following linear problem:

$$\begin{aligned} &\text{Maximize:} \\ &\quad 1.2x + 1.8y + 2.1z \\ &\text{Subject to:} \\ &\quad 1.5x + 1.2y + 1.8z \leq 2.6 \\ &\quad 0.8x + 0.6y + 0.9z \geq 1.2 \\ &\text{Bounds:} \\ &\quad 0.1 \leq x \leq 0.6 \\ &\quad 0.2 \leq y \leq 1.5 \\ &\quad 0.3 \leq z \leq 2.8 \end{aligned} \tag{6.4}$$

Note that this is the same problem that was modelled and optimized in chapter of *C Interface*.

### 6.4.1 Example details

Below is the source code solving the above problem using COPT Java interface.

Listing 6.4: Lp\_ex1.java

```
1  /*
2   * This file is part of the Cardinal Optimizer, all rights reserved.
3   */
4  import copt.*;
5
6  // The problem to solve:
7  //
8  // Maximize:
9  //   1.2 x + 1.8 y + 2.1 z
10 //
11 // Subject to:
12 //   1.5 x + 1.2 y + 1.8 z <= 2.6
13 //   0.8 x + 0.6 y + 0.9 z >= 1.2
14 //
15 // where:
16 //   0.1 <= x <= 0.6
17 //   0.2 <= y <= 1.5
18 //   0.3 <= z <= 2.8
19 public class Lp_ex1 {
20     public static void main(final String argv[]) {
21         try {
22             Env env = new Env();
23             Model model = env.createModel("lp_ex1");
24
25             // Add variables
26             //
27             // obj: 1.2 x + 1.8 y + 2.1 z
28             //
29             // var:
30             // 0.1 <= x <= 0.6
31             // 0.2 <= y <= 1.5
32             // 0.3 <= z <= 2.8
```

(continues on next page)

(continued from previous page)

```

33 //
34 Var x = model.addVar(0.1, 0.6, 1.2, copt.Consts.CONTINUOUS, "x");
35 Var y = model.addVar(0.2, 1.5, 1.8, copt.Consts.CONTINUOUS, "y");
36 Var z = model.addVar(0.3, 2.8, 2.1, copt.Consts.CONTINUOUS, "z");
37
38 // Add new constraints using linear expression
39 //
40 // r0: 1.5 x + 1.2 y + 1.8 z <= 2.6
41 // r1: 0.8 x + 0.6 y + 0.9 z >= 1.2
42 //
43 Expr e0 = new Expr(x, 1.5);
44 e0.addTerm(y, 1.2);
45 e0.addTerm(z, 1.8);
46 model.addConstr(e0, copt.Consts.LESS_EQUAL, 2.6, "r0");
47
48 Expr e1 = new Expr(x, 0.8);
49 e1.addTerm(y, 0.6);
50 e1.addTerm(z, 0.9);
51 model.addConstr(e1, copt.Consts.GREATER_EQUAL, 1.2, "r1");
52
53 // Set parameters and attributes
54 model.setDblParam(copt.DblParam.TimeLimit, 10);
55 model.setObjSense(copt.Consts.MAXIMIZE);
56
57 // Solve problem
58 model.solve();
59
60 // Output solution
61 if (model.getIntAttr(copt.IntAttr.HasLpSol) != 0) {
62     System.out.println("\nFound optimal solution:");
63     VarArray vars = model.getVars();
64     for (int i = 0; i < vars.size(); i++) {
65         Var var = vars.getVar(i);
66         System.out.println("  " + var.getName() + " = "
67             + var.get(copt.DblInfo.Value));
68     }
69     System.out.println("Obj = " + model.getDblAttr(copt.DblAttr.LpObjVal));
70 }
71
72 System.out.println("\nDone");
73 } catch (CoptException e) {
74     System.out.println("Error Code = " + e.getCode());
75     System.out.println(e.getMessage());
76 }
77 }
78 }

```

Let's now walk through the example, line by line, to understand how it achieves the desired result of optimizing the model.



#### 6.4.1.1 Import COPT class

To use the Java interface of COPT, users need to import the Java interface class of COPT first.

```
import copt.*;
```

#### 6.4.1.2 Creating environment and model

Essentially, any Java application using Cardinal Optimizer should start with a COPT environment, where user could add one or more models. Note that each model encapsulates a problem and corresponding data.

Furthermore, to create multiple problems, one can load them one by one in the same model, besides the naive option of creating multiple models in the environment.

```
Envr env = new Envr();  
Model model = env.createModel("lp_ex1");
```

The above call instantiates a COPT environment and a model with name “COPT Java Example”.

#### 6.4.1.3 Adding variables

The next step in our example is to add variables to the model. Variables are added through addVar() or addVars() method on the model object. A variable is always associated with a particular model.

```
// Add variables  
//  
// obj: 1.2 x + 1.8 y + 2.1 z  
//  
// var:  
// 0.1 <= x <= 0.6  
// 0.2 <= y <= 1.5  
// 0.3 <= z <= 2.8  
//  
Var x = model.addVar(0.1, 0.6, 1.2, copt.Consts.CONTINUOUS, "x");  
Var y = model.addVar(0.2, 1.5, 1.8, copt.Consts.CONTINUOUS, "y");  
Var z = model.addVar(0.3, 2.8, 2.1, copt.Consts.CONTINUOUS, "z");
```

The first and second arguments to the addVar() call are the variable lower and upper bounds, respectively. The third argument is the linear objective coefficient. The fourth argument is the variable type. Our variables are all continuous in this example. The final argument is the name of the variable.

The addVar() method has been overloaded to accept several different argument lists. Please refer to *Java Modeling Classes* of Java API reference for further details.

#### 6.4.1.4 Adding constraints

The next step in the example is to add the linear constraints. As with variables, constraints are always associated with a specific model. They are created using addConstr() or addConstrs() methods on the model object.

```
// Add new constraints using linear expression  
//  
// r0: 1.5 x + 1.2 y + 1.8 z <= 2.6  
// r1: 0.8 x + 0.6 y + 0.9 z >= 1.2  
//  
Expr e0 = new Expr(x, 1.5);  
e0.addTerm(y, 1.2);
```

(continues on next page)

(continued from previous page)

```

e0.addTerm(z, 1.8);
model.addConstr(e0, copt.Consts.LESS_EQUAL, 2.6, "r0");

Expr e1 = new Expr(x, 0.8);
e1.addTerm(y, 0.6);
e1.addTerm(z, 0.9);
model.addConstr(e1, copt.Consts.GREATER_EQUAL, 1.2, "r1");

```

Two constraints here are created by building linear expressions incrementally. That is, an expression can be built by constructor of a variable and its coefficient, and then by `addTerm()` method.

#### 6.4.1.5 Setting parameters and attributes

The next step in the example is to set parameters and attributes of the problem before optimization.

```

// Set parameters and attributes
model.setDblParam(copt.DblParam.TimeLimit, 10);
model.setObjSense(copt.Consts.MAXIMIZE);

```

The `setDblParam()` call here with `copt.DblParam.TimeLimit` argument sets solver to optimize up to 10 seconds. The `setObjSense()` call with `copt.Consts.MAXIMIZE` argument sets objective sense as maximization.

#### 6.4.1.6 Solving problem

Now that the model has been built, the next step is to optimize it:

```

// Solve problem
model.solve();

```

This routine performs the optimization and populates several internal model attributes (including the status of the optimization, the solution, etc.).

#### 6.4.1.7 Outputting solution

After solving the problem, one can query the values of the attributes for various of purposes.

```

// Output solution
if (model.getIntAttr(copt.IntAttr.HasLpSol) != 0) {
    System.out.println("\nFound optimal solution:");
    VarArray vars = model.getVars();
    for (int i = 0; i < vars.size(); i++) {
        Var var = vars.getVar(i);
        System.out.println("    " + var.getName() + " = "
                           + var.get(copt.DblInfo.Value));
    }
    System.out.println("Obj = " + model.getDblAttr(copt.DblAttr.LpObjVal));
}

System.out.println("\nDone");

```

Specifically, one can query the `copt.IntAttr.HasLpSol` attribute on the model to know whether we have optimal LP solution; query the `copt.DblInfo.Value` attribute of a variable to obtain its solution value; query the `copt.DblAttr.LpObjVal` attribute on the model to obtain the objective value for the current solution.

The names and types of all model, variable, and constraint attributes can be found in [Constants](#) of Java API reference.

#### 6.4.1.8 Error handling

Errors in the COPT Java interface are handled through the Java exception mechanism. In the example, all COPT statements are enclosed inside a try block, and any associated errors would be caught by the catch block.

```
} catch (CoptException e) {  
    System.out.println("Error Code = " + e.getCode());  
    System.out.println(e.getMessage());  
}
```

### 6.4.2 Build and Run

To build and run java example, users may refer to files under `$COPT_HOME/examples/java`. Specifically, We provide an example file in java and a script file to build. This single example runs on all platforms that support Java.

First of all, download and install *Java 8 or above* on your platform.

#### 6.4.2.1 Java example detail

In the java example folder `$COPT_HOME/examples/java`, the easiest way to run the example is to enter the java example folder in console or terminal and then execute command `'sh run.sh'`.

This java project has dependency on COPT java package `copt_java.jar`, which defines all java classes of COPT solver. In addition, `copt_java.jar` loads two shared libraries, that is, `coptjniwrap.dll` and `copt_cpp.dll` on Windows, `libcoptjniwrap.so` and `libcopt_cpp.so` on Linux, `libcoptjniwrap.dylib` and `libcopt_cpp.dylib` on Mac respectively. Note that `coptjniwrap` library is a JNI swig wrapper and acts as a bridge between COPT java package and native library `copt_cpp`, which declares and implements COPT constants, interfaces and methods. So users should make sure they are installed properly on runtime search paths.

In summary, to run java example, users should have COPT installed properly. Specifically, it requires two related COPT shared libraries existing on runtime search paths, and valid license files to run. Please refer to *Install Guide for Cardinal Optimizer* for further details.

## 6.5 Python Interface

### 6.5.1 Installation guide

Currently, the Python interface of the Cardinal Optimizer (COPT) supports Python 2.7, 3.6-3.10 versions. Before using the Python interface, please ensure that COPT has been installed and configured correctly. For details, please refer to *How to install the Cardinal Optimizer*. Users can download Python from [Anaconda distribution](#) or [Python official distribution](#). We recommend users install the Anaconda distribution, because it is more user-friendly and convenient for Python novices (For Windows, please don't install Python via Microsoft Store). If you use official Python distribution or Python shipped with system, then make sure you have installed the `pip` and `setuptools` Python packages beforehand.

### 6.5.1.1 Windows

#### Method 1: via pip install (recommended)

Open the cmd command window (if Python is an Anaconda distribution, open the Anaconda command line window) and enter the following command:

```
pip install coptpy
```

If an older version of the `coptpy` package has been installed, please open the cmd command window (if Python is an Anaconda distribution, open the Anaconda command line window) and enter the following command to upgrade to the latest version of the `coptpy` package:

```
pip install --upgrade coptpy
```

#### Method 2: via COPT installation package

For Windows, assuming the installation path of COPT is: "C:\Program Files\COPT", please switch to the directory "C:\Program Files\COPT\lib\python" and execute the following commands on command line:

```
python setup.py install
```

Note that if COPT is installed on the system disk, you need to **execute with administrator privileges** to open the command prompt. To test whether the Python interface is installed correctly, users can switch to the directory "C:\Program Files\COPT\examples\python" and execute the following commands on the command line:

```
python lp_ex1.py
```

If the model is solved correctly, it means that the Python interface of COPT has been installed correctly.

**Note** If you use the official release of Python 3.8, assume that its installation path is: "C:\Program Files\Python38", you need to copy the `copt_cpp.dll` file in the "bin" subdirectory of the COPT installation path to "C:\Program Files\Python38\Lib\site-packages\coptpy" to solve the problem of dynamic library dependency.

Currently, `coptpy` already supports type hints, users can execute the following command in the command line window (if Python is the Anaconda release version, please open Anaconda Prompt):

```
pip install coptpy-stubs
```

After successfully installed, when writing code in the Python IDE, you will be prompted to complete the variable name and the value of the function parameter.

### 6.5.1.2 Linux

#### Method 1: via pip install (recommended)

Open the terminal and enter the following command:

```
pip install coptpy
```

If an older version of the `coptpy` package has been installed, please open the terminal and enter the following command to upgrade to the latest version of the `coptpy` package:

```
pip install --upgrade coptpy
```

#### Method 2: via COPT installation package

For Linux, suppose the installation path of COPT is: `/opt/copt60`, please switch to the directory `/opt/copt60/lib/python` and execute the following commands on terminal:

```
sudo python setup.py install
```

For users using Python from Anaconda distribution, if above commands fails, assuming the installation path of Anaconda is: "/opt/anaconda3", please execute the following commands instead on terminal to install the Python interface of COPT:

```
sudo /opt/anaconda3/bin/python setup.py install
```

To test whether the Python interface is installed correctly, users can switch to the directory /opt/copt60/examples/python and execute the following commands on terminal:

```
python lp_ex1.py
```

If the model solved correctly, it means that the Python interface of COPT has been installed correctly. Currently, `coptpy` already supports type hints, users can execute the following command in the terminal:

```
pip install coptpy-stubs
```

After successfully installed, when writing code in the Python IDE, you will be prompted to complete the variable name and the value of the function parameter.

### 6.5.1.3 MacOS

#### Method 1: via pip install (recommended)

Open the terminal and enter the following command:

```
pip install coptpy
```

If an older version of the `coptpy` package has been installed, please open the terminal and enter the following command to upgrade to the latest version of the `coptpy` package:

```
pip install --upgrade coptpy
```

#### Method 2: via COPT installation package

For MacOS, assuming that the installation path of COPT is: /Applications/copt60, please switch the directory to /Applications/copt60/lib/python and execute the following commands on terminal:

```
sudo python setup.py install
```

To test whether the Python interface is installed correctly, users can switch to the directory /Applications/copt60/examples/python and execute the following commands on terminal:

```
python lp_ex1.py
```

If the model solved correctly, it means that the Python interface of COPT has been installed correctly. Currently, `coptpy` already supports type hints, users can execute the following command in the terminal:

```
pip install coptpy-stubs
```

After successfully installed, when writing code in the Python IDE, you will be prompted to complete the variable name and the value of the function parameter.

## 6.5.2 Example details

This chapter illustrate the use of C interface of Cardinal Optimizer through a simple Python example. The problem to solve is shown in Eq. 6.5:

$$\begin{aligned}
 &\text{Maximize:} \\
 &\quad 1.2x + 1.8y + 2.1z \\
 &\text{Subject to:} \\
 &\quad 1.5x + 1.2y + 1.8z \leq 2.6 \\
 &\quad 0.8x + 0.6y + 0.9z \geq 1.2 \\
 &\text{Bounds:} \\
 &\quad 0.1 \leq x \leq 0.6 \\
 &\quad 0.2 \leq y \leq 1.5 \\
 &\quad 0.3 \leq z \leq 2.8
 \end{aligned} \tag{6.5}$$

The source code for solving the above problem using Python API of Cardinal Optimizer is shown in Listing 6.5:

Listing 6.5: lp\_ex1.py

```

1  #
2  # This file is part of the Cardinal Optimizer, all rights reserved.
3  #
4
5  """
6  The problem to solve:
7
8  Maximize:
9      1.2 x + 1.8 y + 2.1 z
10
11  Subject to:
12      1.5 x + 1.2 y + 1.8 z <= 2.6
13      0.8 x + 0.6 y + 0.9 z >= 1.2
14
15  where:
16      0.1 <= x <= 0.6
17      0.2 <= y <= 1.5
18      0.3 <= z <= 2.8
19  """
20
21  from coptpy import *
22
23  # Create COPT environment
24  env = Envr()
25
26  # Create COPT model
27  model = env.createModel("lp_ex1")
28
29  # Add variables: x, y, z
30  x = model.addVar(lb=0.1, ub=0.6, name="x")
31  y = model.addVar(lb=0.2, ub=1.5, name="y")
32  z = model.addVar(lb=0.3, ub=2.8, name="z")
33
34  # Add constraints
35  model.addConstr(1.5*x + 1.2*y + 1.8*z <= 2.6)
36  model.addConstr(0.8*x + 0.6*y + 0.9*z >= 1.2)
37
38  # Set objective function
39  model.setObjective(1.2*x + 1.8*y + 2.1*z, sense=COPT.MAXIMIZE)
40

```

(continues on next page)

(continued from previous page)

```

41 # Set parameter
42 model.setParam(COPT.Param.TimeLimit, 10.0)
43
44 # Solve the model
45 model.solve()
46
47 # Analyze solution
48 if model.status == COPT.OPTIMAL:
49     print("Objective value: {}".format(model.objval))
50     allvars = model.getVars()
51
52     print("Variable solution:")
53     for var in allvars:
54         print(" x[{}]: {}".format(var.index, var.x))
55
56     print("Variable basis status:")
57     for var in allvars:
58         print(" x[{}]: {}".format(var.index, var.basis))
59
60 # Write model, solution and modified parameters to file
61 model.write("lp_ex1.mps")
62 model.write("lp_ex1.bas")
63 model.write("lp_ex1.sol")
64 model.write("lp_ex1.par")

```

We will explain how to use the Python API step by step based on code above, please refer to *C API Reference* for detailed usage of Python API.

### 6.5.2.1 Import Python interface

To use the Python interface of COPT, users need to import the Python interface library first.

```
from coptpy import *
```

### 6.5.2.2 Create environment

To solve any problem with COPT, users need to create optimization environment before creating any model.

```
# Create COPT environment
env = Envr()
```

### 6.5.2.3 Create model

If the optimization environment was created successfully, users need to create the model to solve, which includes variables and constraints information.

```
# Create COPT model
model = env.createModel("lp_ex1")
```

#### 6.5.2.4 Add variables

Users can specify information such as objective costs, lower and upper bounds of variables when creating them. In this example, we just set the lower and upper bounds of variables and their names.

```
# Add variables: x, y, z
x = model.addVar(lb=0.1, ub=0.6, name="x")
y = model.addVar(lb=0.2, ub=1.5, name="y")
z = model.addVar(lb=0.3, ub=2.8, name="z")
```

#### 6.5.2.5 Add constraints

After adding variables, we can then add constraints to the model.

```
# Add constraints
model.addConstr(1.5*x + 1.2*y + 1.8*z <= 2.6)
model.addConstr(0.8*x + 0.6*y + 0.9*z >= 1.2)
```

#### 6.5.2.6 Set objective function

After adding variables and constraints, we can further specify objective function for the model.

```
# Set objective function
model.setObjective(1.2*x + 1.8*y + 2.1*z, sense=COPT.MAXIMIZE)
```

#### 6.5.2.7 Set parameters

Users can set optimization parameters before solving the model, e.g. set optimization time limit to 10 seconds.

```
# Set parameter
model.setParam(COPT.Param.TimeLimit, 10.0)
```

#### 6.5.2.8 Solve model

Solve the model via solve method.

```
# Solve the model
model.solve()
```

#### 6.5.2.9 Analyze solution

When solving finished, we should query the optimization status first. If the optimization status is optimal, then we can retrieve objective value, solution and basis status of variables.

```
# Analyze solution
if model.status == COPT.OPTIMAL:
    print("Objective value: {}".format(model.objval))
    allvars = model.getVars()

    print("Variable solution:")
    for var in allvars:
        print(" x[{}]: {}".format(var.index, var.x))
```

(continues on next page)



(continued from previous page)

```
print("Variable basis status:")
for var in allvars:
    print(" x[{0}]: {1}".format(var.index, var.basis))
```

#### 6.5.2.10 Write files

Users can write current model to MPS format file, and write solution, basis status and modified parameters to file.

```
# Write model, solution and modified parameters to file
model.write("lp_ex1.mps")
model.write("lp_ex1.bas")
model.write("lp_ex1.sol")
model.write("lp_ex1.par")
```

### 6.5.3 Best Practice

#### 6.5.3.1 Upgrade to newer version

If users have COPT python installed and need to upgrade latest version, it is recommended to remove previous version before installing new version. To remove previous version, it is as simple as deleting the folder `coptpy` at `site-package`.

#### 6.5.3.2 Multi-Thread Programming

COPT does not guarantee thread safe and modelling APIs are not reentrant in general. It is safe to share COPT Envr objects among threads. However, it is not recommended to share Model objects among threads, unless you understand what you are doing. For instance, if you share the same model between two threads. One thread is responsible for modelling and solving. The other thread is used to monitor the progress and may interrupt at some circumstances, such as running out of time.

#### 6.5.3.3 Dictionary order guaranteed after Python v3.7

As you know, Python dictionaries did not preserve the order in which items were added to them. For instance, you might type `{'fruits': ['apple', 'orange'], 'veggies': ['carrot', 'pea']}` and get back `{'veggies': ['carrot', 'pea'], 'fruits': ['apple', 'orange']}`.

However, the situation is changed. Standard dict objects preserve order in the implementation of Python 3.6. This order-preserving property is becoming a language feature in Python 3.7.

If your program has dependency on dictionary orders, install `coptpy` for Python v3.7 or later version. For instance, if your model is implemented in Python 2.7 as follows:

```
m = Envr().createModel("customized model")
vx = m.addVars(['hello', 'world'], [0, 1, 2], nameprefix = "X")
# add a constraint for each var in tupledict 'vx'
m.addConstrs(vx[key] >= 1.0 for key in vx)
```

Your model might end up with rows `{R(hello,1), R(hello,0), R(world,1), R(world,0), R(hello,2), R(world,2)}`.

#### 6.5.3.4 Use quicksum and psdquicksum when possible

COPT python package supports building linear expression, quadratic expression and PSD expression in natural way. For linear and quadratic expression, it is recommended to use `quicksum()` to build expression objects. For linear and PSD expression, it is recommended to use `psdquicksum()` to build expression objects. Both of them implement inplace summation, which is much faster than standard plus operator.

## 6.6 AMPL Interface

AMPL is an algebraic modeling language for describing large-scale complex mathematical problems, it was hooked to many commercial and open-source mathematical optimizers, with various data interfaces and extensions, and received high popularity among both industries and institutes, see [Who uses AMPL?](#) for more information. The solver `coptampl` uses **Cardinal Optimizer** to solve linear programming, convex quadratic programming, convex quadratic constrained programming and mixed integer programming problems. Normally `coptampl` is invoked by AMPL's solve command, which gives the invocation:

```
coptampl stub -AMPL
```

in which `stub.nl` is an AMPL generic output file (possibly written by '`ampl -obstub`' or '`ampl -ogstub`'). After solving the problem, `coptampl` writes a `stub.sol` file for use by AMPL's solve and solution commands. When you run AMPL, this all happens automatically if you give the AMPL commands:

```
ampl: option solver coptampl;
ampl: solve;
```

### 6.6.1 Installation Guide

To use `coptampl` in AMPL, you must have a valid AMPL license and make sure that you have installed Cardinal Optimizer and setup its license properly, see [How to install Cardinal Optimizer](#) for details. Be sure to check if it satisfies the following requirements for different operating systems.

#### 6.6.1.1 Windows

On Windows platform, the `coptampl.exe` utility and the `copt.dll` dynamic library contained in the Cardinal Optimizer must appear somewhere in your user or system PATH environment variable (or in the current directory).

To test if your setting meets the above requirements, you can check it by executing commands below in command prompt:

```
coptampl -v
```

And you are expected to see output similar to the following on screen:

```
AMPL/x-COPT Optimizer [6.0.0] (windows-x86), driver(20220526), MP(20220526)
```

If the commands failed, then you should recheck your settings.

### 6.6.1.2 Linux

On Linux platform, the `coptampl` utility must appears somewhere in your `$PATH` environment variable, while the `libcopt.so` shared library must appears somewhere in your `$LD_LIBRARY_PATH` environment variable.

Similarly, to test if your setting meets the above requirements, just execute commands below in shell:

```
coptampl -v
```

And you are expected to see output similar to the following on screen:

```
AMPL/x-COPT Optimizer [6.0.0] (linux-x86), driver(20220526), MP(20220526)
```

If the commands failed, please recheck your settings.

### 6.6.1.3 MacOS

On MacOS platform, the `coptampl` utility must appears somewhere in your `$PATH` environment variable, while the `libcopt.dylib` dynamic library must appears somewhere in your `$DYLD_LIBRARY_PATH` environment variable.

You can execute commands below in shell to see if your settings meets the above requirements:

```
coptampl -v
```

And you are expected to see output similar to the following on screen:

```
AMPL/x-COPT Optimizer [6.0.0] (macos-x86), driver(20220526), MP(20220526)
```

If the commands failed, then please recheck your settings.

## 6.6.2 Solver Options and Exit Codes

The `coptampl` utility offers some options to customize its behavior. Users can control it by setting the environment variable `copt_options` or use AMPL's `option` command. To see all available options, please invoke:

```
coptampl ==
```

The supported parameters and their interpretation for current version are shown in [Table 6.1](#):

Table 6.1: Parameters of `coptampl`

Parameter	Interpretation
barhomogeneous	whether to use homogeneous self-dual form in barrier
bariterlimit	iteration limit of barrier method
barthreads	number of threads used by barrier
basis	whether to use or return basis status
bestbound	whether to return best bound by suffix
conflictanalysis	whether to perform conflict analysis
crossoverthreads	number of threads used by crossover
cutlevel	level of cutting-planes generation
divingheurlevel	level of diving heuristics
dualize	whether to dualize a problem before solving it
dualperturb	whether to allow the objective function perturbation
dualprice	specifies the dual simplex pricing algorithm
dualtol	the tolerance for dual solutions and reduced cost
feastol	the feasibility tolerance

continues on next page

Table 6.1 – continued from previous page

heurlevel	level of heuristics
iisfind	whether to compute IIS and return result
iismethod	specify the IIS method
inttol	the integrality tolerance for variables
logging	whether to print solving logs
logfile	name of log file
exportfile	name of model file to be exported
lpmethod	method to solve the LP problem
matrixtol	input matrix coefficient tolerance
mipstart	whether to use initial values for MIP problem
miptasks	number of MIP tasks in parallel
nodecutrounds	rounds of cutting-planes generation of tree node
odelimit	node limit of the optimization
objno	objective number to solve
count	whether to count the number of solutions
stub	name prefix for alternative MIP solutions written
presolve	level of presolving before solving a problem
relgap	the relative gap of optimization
absgap	the absolute gap of optimization
return_mipgap	whether to return absolute/relative gap by suffix
rootcutlevel	level of cutting-planes generation of root node
rootcutrounds	rounds of cutting-planes generation of root node
roundingheurlevel	level of rounding heuristics
scaling	whether to perform scaling before solving a problem
simplexthreads	number of threads used by dual simplex
sos	whether to use ‘.sosno’ and ‘.ref’ suffix
sos2	whether to use SOS2 to represent piecewise linear terms
strongbranching	level of strong branching
submipheurlevel	level of Sub-MIP heuristics
threads	number of threads to use
timelimit	time limit of the optimization
treecutlevel	level of cutting-planes generation of search tree
wantsol	whether to generate ‘.sol’ file

Please refer to *COPT Parameters* for details.

AMPL uses suffix to store or pass model and solution information, and also some extension features, such as support for SOS constraints. Currently, `coptampl` support suffix information as shown in *Suffix supported by coptampl* :

Table 6.2: Suffix supported by `coptampl`

Suffix	Interpretation
absmipgap	absolute gap for MIP problem
bestbound	best bound for MIP problem
iis	store IIS status of variables or constraints
nsol	number of pool solutions written
ref	weight of variable in SOS constraint
relmipgap	relative gap for MIP problem
sos	store type of SOS constraint
sosno	type of SOS constraint
sosref	store variable weight in SOS constraint
sstatus	basis status of variables and constraints

Users who want to know how to use SOS constraints in AMPL, please refer to resources in AMPL’s website: [How to use SOS constraints in AMPL](#) .

When solving finished, `coptamp1` will display a status message and return exit code to AMPL. The exit code can be displayed by:

```
ampl: display solve_result_num;
```

If no solution was found or something unexpected happened, `coptamp1` will return non-zero code to AMPL from [Table 6.3](#):

Table 6.3: Exit codes of `coptamp1`

Exit Code	Interpretation
0	optimal solution
200	infeasible
300	unbounded
301	infeasible or unbounded
600	user interrupted

### 6.6.3 Example Usage

The following section will illustrate the use of AMPL by a well-known example called “Diet problem”, which finds a mix of foods that satisfies requirements on the amounts of various vitamins, see [AMPL book](#) for details.

Suppose the following kinds of foods are available for the following prices per unit, see [Table 6.4](#):

Table 6.4: Prices of foods

Food	Price
BEEF	3.19
CHK	2.59
FISH	2.29
HAM	2.89
MCH	1.89
MTL	1.99
SPG	1.99
TUR	2.49

These foods provide the following percentages, per unit, of the minimum daily requirements for vitamins A, C, B1 and B2, see [Table 6.5](#):

Table 6.5: Nutrition of foods

	A	C	B1	B2
BEEF	60%	20%	10%	15%
CHK	8	0	20	20
FISH	8	10	15	10
HAM	40	40	35	10
MCH	15	35	15	15
MTL	70	30	15	15
SPG	25	50	25	15
TUR	60	20	15	10

The problem is to find the cheapest combination that meets a week’s requirements, that is, at least 700% of the daily requirements for each nutrient.

To summarize, the mathematical form for the above problem can be modeled as shown in Eq. 6.6:

Minimize:

$$\sum_{j \in J} cost_j \cdot buy_j$$

Subject to:

$$n\_min_i \leq \sum_{j \in J} amt_{i,j} \cdot buy_j \leq n\_max_i \quad \forall i \in I$$

$$f\_min_j \leq buy_j \leq f\_max_j \quad \forall j \in J$$

(6.6)

The AMPL model for above problem is shown in `diet.mod`, see Listing 6.6:

Listing 6.6: `diet.mod`

```

1  # The code is adopted from:
2  #
3  # https://github.com/Pyomo/pyomo/blob/master/examples/pyomo/amplbook2/diet.mod
4  #
5  # with some modification by developer of the Cardinal Optimizer
6
7  set NUTR;
8  set FOOD;
9
10 param cost {FOOD} > 0;
11 param f_min {FOOD} >= 0;
12 param f_max {j in FOOD} >= f_min[j];
13
14 param n_min {NUTR} >= 0;
15 param n_max {i in NUTR} >= n_min[i];
16
17 param amt {NUTR, FOOD} >= 0;
18
19 var Buy {j in FOOD} >= f_min[j], <= f_max[j];
20
21 minimize Total_Cost:
22     sum {j in FOOD} cost[j] * Buy[j];
23
24 subject to Diet {i in NUTR}:
25     n_min[i] <= sum {j in FOOD} amt[i, j] * Buy[j] <= n_max[i];

```

The data file for above problem is shown in `diet.dat`, see Listing 6.7:

Listing 6.7: `diet.dat`

```

1  # The data is adopted from:
2  #
3  # https://github.com/Pyomo/pyomo/blob/master/examples/pyomo/amplbook2/diet.dat
4  #
5  # with some modification by developer of the Cardinal Optimizer
6
7  data;
8
9  set NUTR := A B1 B2 C ;
10 set FOOD := BEEF CHK FISH HAM MCH MTL SPG TUR ;
11
12 param:    cost    f_min    f_max :=
13   BEEF    3.19     0       100
14   CHK     2.59     0       100
15   FISH    2.29     0       100
16   HAM     2.89     0       100
17   MCH     1.89     0       100

```

(continues on next page)

(continued from previous page)

```

18  MTL  1.99  0  100
19  SPG  1.99  0  100
20  TUR  2.49  0  100 ;
21
22  param:  n_min  n_max :=
23  A      700  10000
24  C      700  10000
25  B1     700  10000
26  B2     700  10000 ;
27
28  param amt (tr):
29          A    C    B1  B2 :=
30  BEEF  60  20  10  15
31  CHK   8   0  20  20
32  FISH  8   10  15  10
33  HAM   40  40  35  10
34  MCH   15  35  15  15
35  MTL   70  30  15  15
36  SPG   25  50  25  15
37  TUR   60  20  15  10 ;

```

To solve the problem with `coptampl` in AMPL, just type commands in command prompt on Windows or shell on Linux and MacOS:

```

ampl: model diet.mod;
ampl: data diet.dat;
ampl: option solver coptampl;
ampl: option copt_options 'logging 1';
ampl: solve;

```

`coptampl` solve it quickly and display solving log and status message on screen:

```

x-COPT 5.0.1: optimal solution; objective 88.2
1 simplex iterations

```

So `coptampl` claimed it found the optimal solution, and the minimal cost is 88.2 units. You can further check the solution by:

```

ampl: display Buy;

```

And you will get:

```

Buy [*] :=
BEEF  0
CHK   0
FISH  0
HAM   0
MCH  46.6667
MTL   0
SPG   0
TUR   0
;

```

So if we buy 46.667 units of MCH, we will have a minimal cost of 88.2 units.

## 6.7 Pyomo Interface

Pyomo is a Python based, open source optimization modeling language with a diverse set of optimization capabilities. It is used by researchers to solve complex real-world applications, see [Who uses Pyomo?](#) for more introduction. The following documentation explains how to use the **Cardinal Optimizer**.

### 6.7.1 Installation Guide

To use the Cardinal Optimizer in Pyomo, you should setup Pyomo and Cardinal Optimizer correctly first. Pyomo currently supports Python 2.7, 3.6-3.9, you can install Python from [Anaconda Distribution of Python](#) or from [Official Python](#). We recommend install Python from Anaconda since it is much more friendly and convenient for fresh users.

#### 6.7.1.1 Using conda

The recommended way to install Pyomo in Anaconda Distribution of Python is to use `conda` which is built-in supported. Just execute the following commands in command prompt on Windows or shell on Linux and MacOS:

```
conda install -c conda-forge pyomo
```

Pyomo also has conditional dependencies on a variety of third-party Python packages, they can be installed using `conda` with commands:

```
conda install -c conda-forge pyomo.extras
```

#### 6.7.1.2 Using pip

The alternative way to install Pyomo is to use the standard `pip` utility, just execute the following commands in command prompt on Windows or shell on Linux and MacOS:

```
pip install pyomo
```

If you encounter any problems when installing Pyomo, please refer to [How to install Pyomo](#) for details. To install Cardinal Optimizer and setup its license properly, please refer to [How to install Cardinal Optimizer](#) for details.

### 6.7.2 Example Usage

We are going to make a simple introduction on how to use the Cardinal Optimizer in Pyomo by solving the example described in *AMPL Interface - Example Usage*. Users who want to learn more information about Pyomo may refer to [Pyomo documentation](#) for details.

#### 6.7.2.1 Abstract Model

Pyomo provides two major approaches to construct any supported model types, here we show the **Abstract Model** approach to solve the above problem.

The source code `pydiet_abstract.py` is shown below, see [Listing 6.8](#):



Listing 6.8: pydiet\_abstract.py

```

1  # The code is adopted from:
2  #
3  # https://github.com/Pyomo/pyomo/blob/master/examples/pyomo/amplbook2/diet.py
4  #
5  # with some modification by developer of the Cardinal Optimizer
6
7  from pyomo.core import *
8
9  model = AbstractModel()
10
11  model.NUTR = Set()
12  model.FOOD = Set()
13
14  model.cost = Param(model.FOOD, within=NonNegativeReals)
15  model.f_min = Param(model.FOOD, within=NonNegativeReals)
16
17  model.f_max = Param(model.FOOD)
18  model.n_min = Param(model.NUTR, within=NonNegativeReals)
19  model.n_max = Param(model.NUTR)
20  model.amt = Param(model.NUTR, model.FOOD, within=NonNegativeReals)
21
22  def Buy_bounds(model, i):
23      return (model.f_min[i], model.f_max[i])
24  model.Buy = Var(model.FOOD, bounds=Buy_bounds)
25
26  def Objective_rule(model):
27      return sum_product(model.cost, model.Buy)
28  model.totalcost = Objective(rule=Objective_rule, sense=minimize)
29
30  def Diet_rule(model, i):
31      expr = 0
32
33      for j in model.FOOD:
34          expr = expr + model.amt[i, j] * model.Buy[j]
35
36      return (model.n_min[i], expr, model.n_max[i])
37  model.Diet = Constraint(model.NUTR, rule=Diet_rule)

```

And the data file pydiet\_abstract.dat in Listing 6.9:

Listing 6.9: pydiet\_abstract.dat

```

1  # The data is adopted from:
2  #
3  # https://github.com/Pyomo/pyomo/blob/master/examples/pyomo/amplbook2/diet.dat
4  #
5  # with some modification by developer of the Cardinal Optimizer
6
7  data;
8
9  set NUTR := A B1 B2 C ;
10 set FOOD := BEEF CHK FISH HAM MCH MTL SPG TUR ;
11
12 param: cost f_min f_max :=
13 BEEF 3.19 0 100
14 CHK 2.59 0 100
15 FISH 2.29 0 100
16 HAM 2.89 0 100
17 MCH 1.89 0 100
18 MTL 1.99 0 100

```

(continues on next page)

(continued from previous page)

```

19   SPG   1.99   0   100
20   TUR   2.49   0   100 ;
21
22 param:  n_min  n_max :=
23   A      700  10000
24   C      700  10000
25   B1     700  10000
26   B2     700  10000 ;
27
28 param amt (tr):
29           A    C   B1  B2 :=
30   BEEF    60   20   10  15
31   CHK      8    0   20  20
32   FISH     8   10   15  10
33   HAM     40   40   35  10
34   MCH     15   35   15  15
35   MTL     70   30   15  15
36   SPG     25   50   25  15
37   TUR     60   20   15  10 ;

```

To solve the problem using Pyomo and the Cardinal Optimizer, just type commands below in command prompt on Windows or Bash shell on Linux and MacOS.

```
pyomo solve --solver=coptaml pydiet_abstract.py pydiet_abstract.dat
```

When solving the problem, Pyomo write log information to the screen:

```

[ 0.00] Setting up Pyomo environment
[ 0.00] Applying Pyomo preprocessing actions
[ 0.00] Creating model
[ 0.01] Applying solver
[ 0.05] Processing results
      Number of solutions: 1
      Solution Information
        Gap: None
        Status: optimal
        Function Value: 88.19999999999999
      Solver results file: results.yml
[ 0.05] Applying Pyomo postprocessing actions
[ 0.05] Pyomo Finished

```

Upon completion, you can check the solution summary in `results.yml`:

```

# =====
# = Solver Results                                     =
# =====
# -----
#   Problem Information
# -----
Problem:
- Lower bound: -inf
  Upper bound: inf
  Number of objectives: 1
  Number of constraints: 4
  Number of variables: 8
  Sense: unknown
# -----
#   Solver Information
# -----
Solver:
- Status: ok

```

(continues on next page)

(continued from previous page)

```

Message: COPT-AMPL\x3a optimal solution; objective 88.2, iterations 1
Termination condition: optimal
Id: 0
Error rc: 0
Time: 0.03171110153198242
# -----
#   Solution Information
# -----
Solution:
- number of solutions: 1
  number of solutions displayed: 1
- Gap: None
  Status: optimal
  Message: COPT-AMPL\x3a optimal solution; objective 88.2, iterations 1
  Objective:
    totalcost:
      Value: 88.19999999999999
  Variable:
    Buy[MCH]:
      Value: 46.666666666666664
  Constraint: No values

```

So the minimal total cost is about 88.2 units when buying 46.67 units of MCH.

### 6.7.2.2 Concrete Model

The other approach to construct model in Pyomo is to use **Concrete Model**, we will show how to model and solve the above problem in this way.

The source code `pydiet_concrete.py` is shown in Listing 6.10:

Listing 6.10: `pydiet_concrete.py`

```

1  # The code is adopted from:
2  #
3  # https://github.com/Pyomo/pyomo/blob/master/examples/pyomo/amplbook2/diet.py
4  #
5  # with some modification by developer of the Cardinal Optimizer
6
7  from __future__ import print_function, division
8
9  import pyomo.environ as pyo
10 import pyomo.opt as pyopt
11
12 from copt_pyomo import *
13
14 # Nutrition set
15 NUTR = ["A", "C", "B1", "B2"]
16 # Food set
17 FOOD = ["BEEF", "CHK", "FISH", "HAM", "MCH", "MTL", "SPG", "TUR"]
18
19 # Price of foods
20 cost = {"BEEF": 3.19, "CHK": 2.59, "FISH": 2.29, "HAM": 2.89, "MCH": 1.89,
21         "MTL": 1.99, "SPG": 1.99, "TUR": 2.49}
22 # Nutrition of foods
23 amt = {"BEEF": {"A": 60, "C": 20, "B1": 10, "B2": 15},
24        "CHK": {"A": 8, "C": 0, "B1": 20, "B2": 20},
25        "FISH": {"A": 8, "C": 10, "B1": 15, "B2": 10},
26        "HAM": {"A": 40, "C": 40, "B1": 35, "B2": 10},
27        "MCH": {"A": 15, "C": 35, "B1": 15, "B2": 15},

```

(continues on next page)

(continued from previous page)

```

28     "MTL": {"A": 70, "C": 30, "B1": 15, "B2": 15},
29     "SPG": {"A": 25, "C": 50, "B1": 25, "B2": 15},
30     "TUR": {"A": 60, "C": 20, "B1": 15, "B2": 10}}
31
32 # The "diet problem" using ConcreteModel
33 model = pyo.ConcreteModel()
34
35 model.NUTR = pyo.Set(initialize=NUTR)
36 model.FOOD = pyo.Set(initialize=FOOD)
37
38 model.cost = pyo.Param(model.FOOD, initialize=cost)
39
40 def amt_rule(model, i, j):
41     return amt[i][j]
42 model.amt = pyo.Param(model.FOOD, model.NUTR, initialize=amt_rule)
43
44 model.f_min = pyo.Param(model.FOOD, default=0)
45 model.f_max = pyo.Param(model.FOOD, default=100)
46
47 model.n_min = pyo.Param(model.NUTR, default=700)
48 model.n_max = pyo.Param(model.NUTR, default=10000)
49
50 def Buy_bounds(model, i):
51     return (model.f_min[i], model.f_max[i])
52 model.buy = pyo.Var(model.FOOD, bounds=Buy_bounds)
53
54 def Objective_rule(model):
55     return pyo.sum_product(model.cost, model.buy)
56 model.totalcost = pyo.Objective(rule=Objective_rule, sense=pyo.minimize)
57
58 def Diet_rule(model, j):
59     expr = 0
60
61     for i in model.FOOD:
62         expr = expr + model.amt[i, j] * model.buy[i]
63
64     return (model.n_min[j], expr, model.n_max[j])
65 model.Diet = pyo.Constraint(model.NUTR, rule=Diet_rule)
66
67 # Reduced costs of variables
68 model.rc = pyo.Suffix(direction=pyo.Suffix.IMPORT)
69
70 # Activities and duals of constraints
71 model.slack = pyo.Suffix(direction=pyo.Suffix.IMPORT)
72 model.dual = pyo.Suffix(direction=pyo.Suffix.IMPORT)
73
74 # Use 'copt_direct' solver to solve the problem
75 solver = pyopt.SolverFactory('copt_direct')
76
77 # Use 'copt_persistent' solver to solve the problem
78 # solver = pyopt.SolverFactory('copt_persistent')
79 # solver.set_instance(model)
80
81 results = solver.solve(model, tee=True)
82
83 # Check result
84 print("")
85 if results.solver.status == pyopt.SolverStatus.ok and \
86     results.solver.termination_condition == pyopt.TerminationCondition.optimal:
87     print("Optimal solution found")
88 else:

```

(continues on next page)

(continued from previous page)

```

89     print("Something unexpected happened: ", str(results.solver))
90
91     print("")
92     print("Optimal objective value:")
93     print("    totalcost: {0:6f}".format(pyo.value(model.totalcost)))
94
95     print("")
96     print("Variables solution:")
97     for i in FOOD:
98         print("    buy[{0:4s}] = {1:9.6f} (rc: {2:9.6f})".format(i, \
99                                                                pyo.value(model.buy[i]), \
100                                                                model.rc[model.buy[i]]))
101
102     print("")
103     print("Constraint solution:")
104     for i in NUTR:
105         print("    diet[{0:2s}] = {1:12.6f} (dual: {2:9.6f})".format(i, \
106                                                                model.slack[model.Diet[i]], \
107                                                                model.dual[model.Diet[i]]))

```

To solve the problem using Pyomo and the Cardinal Optimizer, just execute commands below:

```
python pydiet_concrete.py
```

Up completion, you should see solution summary on screen as below:

```

Optimal solution found
Objective:
    totalcost: 88.200000
Variables:
    buy[BEEF] = 0.000000
    buy[CHK ] = 0.000000
    buy[FISH] = 0.000000
    buy[HAM ] = 0.000000
    buy[MCH ] = 46.666667
    buy[MTL ] = 0.000000
    buy[SPG ] = 0.000000
    buy[TUR ] = 0.000000

```

So the Cardinal Optimizer found the optimal solution, which is about 88.2 units when buying about 46.67 units of MCH.

## 6.8 PuLP Interface

PuLP is an open source modeling tool based on Python, it is mainly used for modeling integer programming problems. This chapter introduces how to use the Cardinal Optimizer (COPT) in PuLP.

## 6.8.1 Installation guide

Before calling COPT in PuLP to solve problem, users need to setup PuLP and COPT correctly. PuLP currently supports Python 2.7 and later versions of Python. Users can download Python from [Anaconda distribution](#) or [Python official distribution](#). We recommend users install the Anaconda distribution, because it is more user-friendly and convenient for Python novices.

### 6.8.1.1 Install via conda

We recommend that users who have installed the Anaconda distribution of Python use its own `conda` tool to install PuLP. Execute the following commands in Windows command prompt or terminal on Linux and MacOS:

```
conda install -c conda-forge pulp
```

### 6.8.1.2 Install via pip

Users can also install PuLP through the standard `pip` tool, execute the following command in Windows command prompt or Linux and MacOS terminal:

```
pip install pulp
```

## 6.8.2 Setup PuLP interface

The PuLP interface of COPT is the Python file `copt_pulp.py` in the COPT package. After installing and configuring COPT, users only need to put the interface file in the project directory and import the plug-in:

```
from copt_pulp import *
```

In the solving function `solve`, specify the solver to COPT to solve:

```
prob.solve(COPT_DLL())
```

or:

```
prob.solve(COPT_CMD())
```

## 6.8.3 Introduction of features

The PuLP interface of COPT provides two methods: command line and dynamic library, which are introduced as follows:

### 6.8.3.1 Command line

The command-line method actually calls the interactive tool `copt_cmd` of COPT to solve problems. In this way, PuLP generates the MPS format file corresponding to the model, and combines the parameter settings passed by the user to generate the solving commands. Upon finish of solving, COPT writes and reads the result file, and assigns values to the corresponding variables and return them to PuLP.

Functions of the command line method are encapsulated as class `COPT_CMD`. Users can set parameters when creating the object of the class and provides the following parameters:

- **keepFiles**

This option controls whether to keep the generated temporary files. The default value is 0, which means no temporary files are kept.

- **mip**

This option controls whether to support solving integer programming models. The default value is **True**, which means support solving integer programming models.

- **msg**

This option controls whether to print log information on the screen. The default value is **True**, that is, print log information.

- **mip\_start**

This option controls whether to use initial solution information for integer programming models. The default value is **False**, that is, the initial solution information will not be used.

- **logfile**

This option specifies the solver log. The default value is **None**, which means no solver log will be generated.

- **params**

This option sets optimization parameters in the form of **key=value**. Please refer to the chapter [Parameters](#) for currently supported parameters.

### 6.8.3.2 Dynamic library

The dynamic library method directly calls COPT C APIs to solve problems. In this way, PuLP generates problem data and call COPT APIs to load the problem and parameters set by the user. When optimization finishes, the solution is obtained by calling COPT APIs, and then assigned to the corresponding variables and constraints, and passed back to PuLP.

Functions of the dynamic library method are encapsulated as class **COPT\_DLL**. Users can set parameters when creating the object of the class and provides the following parameters:

- **mip**

This option controls whether to support solving integer programming models. The default value is **True**, which means support solving integer programming models.

- **msg**

This option controls whether to print log information on the screen. The default value is **True**, that is, print log information.

- **mip\_start**

This option controls whether to use initial solution information for integer programming models. The default value is **False**, that is, the initial solution information will not be used.

- **logfile**

This option specifies the solver log. The default value is **None**, which means no solver log will be generated.

- **params**

This option sets optimization parameters in the form of **key=value**. Please refer to the chapter [Parameters](#) for currently supported parameters.

In addition, the following methods are provided:

- **setParam(self, name, val)**

Set optimization solution parameters.

- `getParam(self, name)`  
Obtain optimized solution parameters.
- `getAttr(self, name)`  
Get the attribute information of the model.
- `write(self, filename)`  
Output MPS/LP format model file, COPT binary format model file, result file, basic solution file, initial solution file and parameter setting file.

## 6.9 CVXPY Interface

**CVXPY** is an open source Python-embedded modeling language for convex optimization problems. It lets you express your problem in a natural way that follows the math, which is quite flexible and efficient. This chapter introduces how to use the Cardinal Optimizer (COPT) in CVXPY.

### 6.9.1 Installation guide

Before calling COPT in CVXPY to solve problem, users need to setup CVXPY and COPT correctly. CVXPY currently supports Python 3.6 and later versions of Python. Users can download Python from [Anaconda distribution](#) or [Python official distribution](#). We recommend users install the Anaconda distribution, because it is more user-friendly and convenient for Python novices.

#### 6.9.1.1 Install via conda

We recommend that users who have installed the Anaconda distribution of Python use its own `conda` tool to install CVXPY. Execute the following commands in Windows command prompt or terminal on Linux and MacOS:

```
conda install -c conda-forge cvxpy
```

#### 6.9.1.2 Install via pip

Users can also install CVXPY through the standard `pip` tool, execute the following command in Windows command prompt or Linux and MacOS terminal:

```
pip install cvxpy
```

### 6.9.2 Setup CVXPY interface

The CVXPY interface of COPT is the Python file `copt_cvxpy.py` in the COPT package, and also depends on the Python interface of COPT. Suppose Python version is 3.7, users should install the Python 3.7 version of COPT Python interface, see [Python Interface](#) for detailed install guide. After installing and configuring COPT, users only need to put the interface file in the project directory and import the plugin:

```
from copt_cvxpy import *
```

In the solving function `solve`, specify the solver to COPT to solve:

```
prob.solve(solver=COPT())
```



### 6.9.3 Introduction of features

The CVXPY interface of COPT supports Linear Programming (LP), Mixed Integer Programming (MIP), Quadratic Programming (QP) and Second-Order-Cone Programming (SOCP), common used parameters are:

- **verbose**

CVXPY builtin parameter, which controls whether to display solving log to the screen. The default value is **False**, which means no log to be displayed.

- **params**

This option sets optimization parameters in the form of **key=value**. Please refer to the chapter [Parameters](#) for currently supported parameters.

# Chapter 7

## General Constants

There are two types of constants. One for constructing models, such as optimization directions, constraint senses or variable types. The other for accessing solution results, such as API return code, basis status and LP status.

### 7.1 Version information

- `VERSION_MAJOR`  
The major version number.
- `VERSION_MINOR`  
The minor version number.
- `VERSION_TECHNICAL`  
The technical version number.

### 7.2 Optimization directions

For different optimization scenarios, it may be required to either maximize or minimize the objective function. There are two optimization directions:

- `MINIMIZE`  
For minimizing the objective function.
- `MAXIMIZE`  
For maximizing the objective function.

The optimization direction is automatically set when reading in a problem from file. Besides, COPT provides relevant functions, allowing user to explicitly set. Functions for different APIs are listed below:

Table 7.1: Functions for setting optimization directions

Programming API	Function
C	<code>COPT_SetObjSense</code>
C++	<code>Model::SetObjSense()</code>
C#	<code>Model.SetObjSense()</code>
Java	<code>Model.setObjSense()</code>
Python	<code>Model.setObjSense()</code>

**NOTE:** The function names, calling methods and parameter names in different programming interfaces are slightly different. For details, please refer to the API parameters of each programming language.

## 7.3 Infinity and Undefined Value

### Infinity

In COPT, the infinite bound is represented by a large value, whose default value is also available as a constant:

- INFINITY

The default value (1e30) of the infinite bound.

### Undefined Value

In COPT, the undefined value is represented by another large value. For example, the default solution value of MIP start is set to a constant:

- UNDEFINED

Undefined value(1e40).

## 7.4 Constraint senses

Traditionally, for optimization models, constraints are defined using **senses**. The most common constraint senses are:

- LESS\_EQUAL

For constraint in the form of  $g(x) \leq b$

- GREATER\_EQUAL

For constraint in the form of  $g(x) \geq b$

- EQUAL

For constraint in the form of  $g(x) = b$

In addition, there are two less used constraint senses:

- FREE

For unconstrained expression

- RANGE

For constraints with both lower and upper bounds in the form of  $l \leq g(x) \leq u$ .

**NOTE:** Using constraint senses is supported by COPT but not recommended. We recommend defining constraints using explicit lower and upper bounds.

## 7.5 Variable types

Variable types are used for defining whether a variable is continuous or integral.

- CONTINUOUS  
Non-integer continuous variables
- BINARY  
Binary variables
- INTEGER  
Integer variables

## 7.6 SOS-constraint types

SOS constraint (Special Ordered Set) is a kind of special constraint that places restrictions on the values that a set of variables can take. COPT currently support two types of SOS constraints:

- SOS\_TYPE1  
SOS1 constraint  
At most one variable in the constraint is allowed to take a non-zero value.
- SOS\_TYPE2  
SOS2 constraint  
At most two variables in the constraint are allowed to take non-zero value, and those non-zero variables must be contiguous.

**NOTE:** Variables in SOS constraints are allowed to be continuous, binary and integer.

## 7.7 Indicator constraint

Indicator constraint is a kind of logical constraints, is uses a binary variable  $y$  as the indicator variable, and implies whether the linear constraint  $a^T x \leq b$  is valid based on value of variable  $y$ . The canonical form of an indicator constraint is:

$$y = f \rightarrow a^T x \leq b \quad (7.1)$$

Where  $f \in \{0, 1\}$ . If  $y = f$ , the linear constraint is valid. Otherwise if  $y \neq f$ , the linear constraint is invalid. The sense of the linear constraint can be  $\leq$ ,  $\geq$  and  $=$ .

## 7.8 Second-Order-Cone constraint

The Second-Order-Cone (SOC) constraint is a special type of quadratic constraint, currently, COPT support two types of SOC constraint, which includes:

- CONE\_QUAD : Regular cone

$$Q^n = \left\{ x \in \mathbb{R}^n \mid x_0 \geq \sqrt{\sum_{i=1}^{n-1} x_i^2} \right\} \quad (7.2)$$

- CONE\_RQUAD : Rotated cone.

$$Q_r^n = \left\{ x \in \mathbb{R}^n \mid 2x_0x_1 \geq \sqrt{\sum_{i=2}^{n-1} x_i^2}, x_0 \geq 0, x_1 \geq 0 \right\} \quad (7.3)$$

## 7.9 Quadratic objective function

Besides linear objective function, COPT also supports general convex quadratic objective function.

The mathematical form is:

$$x^T Q x + c^T x \quad (7.4)$$

Where,  $x$  is an array of variables,  $Q$  is the quadratic part of the quadratic objective function and  $c$  is the linear part.

## 7.10 Quadratic constraint

Besides the special type of quadratic constraint, Second-Order-Cone (SOC) constraint, COPT also supports general convex quadratic constraint.

The mathematical form is:

$$x^T Q x + q^T x \leq b \quad (7.5)$$

Where,  $x$  is an array of variables,  $Q$  is the quadratic part of the quadratic constraint and  $c$  is the linear part.

## 7.11 Basis status

For an LP problem with  $n$  variables and  $m$  constraints, the constraints are treated as slack variables *internally*, resulting in  $n + m$  variables. When solving an LP problem using the simplex method, the simplex method fixes  $n$  variables at one of their bounds, and then computes solutions for the other  $m$  variables. The  $m$  variables with computed solution are called *basic* variables, and the other  $n$  variables are called *non-basic* variables. The simplex progress and its final solution can be defined using the basis status of all the variables and constraints. The basis status supported by COPT are listed below:

Table 7.2: Basis status values and descriptions

Basis status codes	Value	Description
BASIS_LOWER	0	The variable is non-basic at its lower bound
BASIS_BASIC	1	The variable is basic
BASIS_UPPER	2	The variable is non-basic at its upper bound
BASIS_SUPERBASIC	3	The variable is non-basic but not any of its bounds
BASIS_FIXED	4	The variable is non-basic and fixed at its bound

## 7.12 Solution status

The solution status of an problem is called solution status, Possible solution status values are listed below:

Table 7.3: Solution Status

Status Codes	Description
UNSTARTED	The solving process is not started yet
OPTIMAL	Optimal values founded
INFEASIBLE	The model is infeasible
UNBOUNDED	The objective is unbounded
INF_OR_UNB	The model is infeasible or unbounded
NUMERICAL	Numerical trouble encountered
MODELIMIT	Solving process not finished within node limit
TIMEOUT	Solving process not finished within time limit
UNFINISHED	The solving process is stopped but solver cannot provide a solution because of numerical issues
IMPRECISE	The solution is imprecise
INTERRUPTED	The solving process is stopped by user interrupt

### Notes

- In the Python API, solution states are defined in COPT's General Constants Class. They can be accessed via the "COPT." prefix or `Model.status` ;
- In the Constant class of the Java API and C# API, the constants about the solution status are defined in the `Status` class;
- The linear programming solution status can be obtained through the attribute "LpStatus" , and the integer programming solution status can be obtained through the attribute "MipStatus" .

## 7.13 Client configuration

For floating and cluster clients, user are allowed to set client configuration parameters, currently available settings are:

- `CLIENT_CLUSTER`  
IP address of cluster server.
- `CLIENT_FLOATING`  
IP address of token server.
- `CLIENT_PASSWORD`  
Password of cluster server.
- `CLIENT_PORT`  
Connection port of token server.
- `CLIENT_WAITTIME`  
Wait time of client.

In different programming interfaces, the ways of accessing constants are slightly different. In the C language interface, the constant name is prefixed with "COPT\_" (like `COPT_MAXIMIZE`). For details, please refer to the corresponding chapters of each programming language API reference manual:

- C API: *C API Reference: Constants*
- C++ API: *C++ API Reference: Constants*
- C# API: *C# API Reference: General Constants*
- Java API: *Java API Reference: General Constants*

- Python API: *Python API Reference: General Constants*

# Chapter 8

## Attributes

To query and modify properties of a COPT model is through the attribute interface. A variety of different attributes are available, and they can be associated with solutions, or the model.

### 8.1 Problem related

Problem related attributes provide the relevant information of the model composition and description. The names and descriptions of these attributes are summarized below.

Table 8.1: Problem related attributes

Name	Type	Description
<i>Cols</i>	Integer	Number of variables (columns) in the problem
<i>PSDCols</i>	Integer	Number of PSD variables in the problem
<i>Rows</i>	Integer	Number of constraints (rows) in the problem
<i>Elms</i>	Integer	Number of non-zero elements in the coefficient matrix
<i>QElms</i>	Integer	Number of non-zero quadratic elements in the quadratic objective function
<i>PSDElms</i>	Integer	Number of PSD terms in objective function
<i>SymMats</i>	Integer	Number of symmetric matrices in the problem
<i>Bins</i>	Integer	Number of binary variables
<i>Ints</i>	Integer	Number of integer variables
<i>Soss</i>	Integer	Number of SOS constraints
<i>Cones</i>	Integer	Number of Second-Order-Cone constraints
<i>QConstrs</i>	Integer	Number of quadratic constraints
<i>PSDConstrs</i>	Integer	Number of PSD constraints
<i>Indicators</i>	Integer	Number of indicator constraints
<i>ObjSense</i>	Integer	The optimization direction
<i>ObjConst</i>	Double	The constant part of the objective function
<i>HasQObj</i>	Integer	Whether the problem has quadratic objective function
<i>HasPSDObj</i>	Integer	Whether the problem has PSD terms in objective function
<i>IsMIP</i>	Integer	Whether the problem is a MIP

- **Cols**

Integer attribute.

Number of variables (columns) in the problem.

- **PSDCols**

Integer attribute.



Number of PSD variables in the problem.

- **Rows**

Integer attribute.

Number of constraints (rows) in the problem.

- **Elms**

Integer attribute.

Number of non-zero elements in the coefficient matrix.

- **QElms**

Integer attribute.

Number of non-zero quadratic elements in the quadratic objective function.

- **PSDElms**

Integer attribute.

Number of PSD terms in objective function.

- **SymMats**

Integer attribute.

Number of symmetric matrices in the problem.

- **Bins**

Integer attribute.

Number of binary variables.

- **Ints**

Integer attribute.

Number of integer variables.

- **Soss**

Integer attribute.

Number of SOS constraints.

- **Cones**

Integer attribute.

Number of Second-Order-Cone constraints.

- **QConstrs**

Integer attribute.

Number of quadratic constraints.

- **PSDConstrs**

Integer attribute.

Number of PSD constraints.

- **Indicators**

Integer attribute.

Number of indicator constraints.

- **ObjSense**

Integer attribute.

The optimization direction.

- **ObjConst**

Double attribute.

The constant part of the objective function.

- **HasQObj**

Integer attribute.

Whether the problem has quadratic objective function.

- **HasPSDObj**

Integer attribute.

Whether the problem has PSD terms in objective function.

- **IsMIP**

Integer attribute.

Whether the problem is a MIP.

## 8.2 Solution related

Solution related attributes provide the relevant information of the solution composition and description. The names and descriptions of these attributes are summarized below.

Table 8.2: Solution related attributes

Name	Type	Description
<i>LpStatus</i>	Integer	The LP status
<i>MipStatus</i>	Integer	The MIP status
<i>SimplexIter</i>	Integer	Number of simplex iterations performed
<i>BarrierIter</i>	Integer	Number of barrier iterations performed
<i>NodeCnt</i>	Integer	Number of explored nodes
<i>PoolSols</i>	Integer	Number of solutions in solution pool
<i>TuneResults</i>	Integer	Number of parameter tuning results
<i>HasLpSol</i>	Integer	Whether LP solution is available
<i>HasBasis</i>	Integer	Whether LP basis is available
<i>HasDualFarkas</i>	Integer	Whether the dual Farkas of an infeasible LP problem is available
<i>HasPrimalRay</i>	Integer	Whether the primal ray of an unbounded LP problem is available
<i>HasMipSol</i>	Integer	Whether MIP solution is available
<i>IISCols</i>	Integer	Number of bounds of columns in IIS
<i>IISRows</i>	Integer	Number of PSD constraints
<i>IISOSs</i>	Integer	Number of SOS constraints in IIS
<i>IISIndicators</i>	Integer	Number of indicator constraints in IIS
<i>HasIIS</i>	Double	Whether IIS is available
<i>HasFeasRelaxSol</i>	Integer	Whether feasibility relaxation solution is available
<i>IsMinIIS</i>	Integer	Whether the computed IIS is minimal
<i>LpObjval</i>	Integer	The LP objective value
<i>BestObj</i>	Double	Best integer objective value for MIP
<i>BestBnd</i>	Double	Best bound for MIP
<i>BestGap</i>	Double	Best relative gap for MIP
<i>FeasRelaxObj</i>	Double	Feasibility relaxation objective value
<i>SolvingTime</i>	Double	The time spent for the optimization (in seconds)

- **LpStatus**  
Integer attribute.  
The LP status. Please refer to *General Constants: Solution Status* for possible values.
- **MipStatus**  
Integer attribute.  
The MIP status. Please refer to *General Constants: Solution Status* for possible values.
- **SimplexIter**  
Integer attribute.  
Number of simplex iterations performed.
- **BarrierIter**  
Integer attribute.  
Number of barrier iterations performed.
- **NodeCnt**  
Integer attribute.  
Number of explored nodes.
- **PoolSols**  
Integer attribute.  
Number of solutions in solution pool.
- **TuneResults**  
Integer attribute.  
Number of parameter tuning results
- **HasLpSol**  
Integer attribute.  
Whether LP solution is available.
- **HasBasis**  
Integer attribute.  
Whether LP basis is available.
- **HasDualFarkas**  
Integer attribute.  
Whether the dual Farkas of an infeasible LP problem is available.
- **HasPrimalRay**  
Integer attribute.  
Whether the primal ray of an unbounded LP problem is available.
- **HasMipSol**  
Integer attribute.  
Whether MIP solution is available.
- **IISCols**  
Integer attribute.  
Number of bounds of columns in IIS.

- **IISRows**  
Integer attribute.  
Number of rows in IIS.
- **IISOSs**  
Integer attribute.  
Number of SOS constraints in IIS.
- **IISIndicators**  
Integer attribute.  
Number of indicator constraints in IIS.
- **HasIIS**  
Integer attribute.  
Whether IIS is available.
- **HasFeasRelaxSol**  
Integer attribute.  
Whether feasibility relaxation solution is available.
- **IsMinIIS**  
Integer attribute.  
Whether the computed IIS is minimal.
- **LpObjval**  
Double attribute.  
The LP objective value.
- **BestObj**  
Double attribute.  
Best integer objective value for MIP.
- **BestBnd**  
Double attribute.  
Best bound for MIP.
- **BestGap**  
Double attribute.  
Best relative gap for MIP.
- **FeasRelaxObj**  
Double attribute.  
Feasibility relaxation objective value.
- **SolvingTime**  
Double attribute.  
The time spent for the optimization (in seconds).

## 8.3 Methods of accessing attributes

In different programming interfaces, the ways to access attributes are slightly different. For details, please refer to the corresponding chapters of each programming language API reference manual:

- C API: *C API Functions: Accessing attributes*
- C++ API: *C++ API Reference: Attributes*
- C# API: *C# API Reference: Attributes*
- Java API: *Java API Reference: Attributes*
- Python API: *Python API Reference: Attributes*

# Chapter 9

## Information

The information constants describe the relevant information of the model components (objective function, constraints and variables), solution results, and feasibility relaxation calculation results. This chapter will introduce the information constants provided by COPT and their meanings.

Table 9.1: COPT information

Name	Type	Description
<i>Obj</i>	Double	Objective cost of columns
<i>LB</i>	Double	Lower bounds of columns or rows
<i>UB</i>	Double	Upper bounds of columns or rows
<i>Value</i>	Double	Solution of columns
<i>Slack</i>	Double	Solution of slack variables, also known as activities of constraints. Only available for LP problem
<i>Dual</i>	Double	Solution of dual variables. Only available for LP problem
<i>RedCost</i>	Double	Reduced cost of columns. Only available for LP problem
<i>DualFarkas</i>	Double	The dual Farkas for constraints of an infeasible LP problem
<i>PrimalRay</i>	Double	The primal ray for variables of an unbounded LP problem
<i>RelaxLB</i>	Double	Feasibility relaxation values for lower bounds of columns or rows
<i>LRelaxUB</i>	Double	Feasibility relaxation values for upper bounds of columns or rows

### 9.1 Problem information

- **Obj**  
Double information.  
Objective cost of columns.
- **LB**  
Double information.  
Lower bounds of columns or rows.
- **UB**  
Double information.  
Upper bounds of columns or rows.

## 9.2 Solution information

- **Value**  
Double information.  
Solution of columns.
- **Slack**  
Double information.  
Solution of slack variables, also known as activities of constraints. Only available for LP problem.
- **Dual**  
Double information.  
Solution of dual variables. Only available for LP problem.
- **RedCost**  
Double information.  
Reduced cost of columns. Only available for LP problem.

## 9.3 Dual Farkas and primal ray

Advanced topic. When an LP is infeasible or unbounded, the solver can return the dual Farkas or primal ray to prove it.

- **DualFarkas**  
Double information.  
  
The dual Farkas for constraints of an infeasible LP problem. Please enable the parameter "ReqFarkasRay" to ensure that the dual Farkas is available when the LP is infeasible.  
  
Without loss of generality, the concept of the dual Farkas can be conveniently demonstrated using an LP problem with general variable bounds and equality constraints:  $Ax = 0$  and  $l \leq x \leq u$ . When the LP is infeasible, a dual Farkas vector  $y$  can prove that the system has conflict that  $\max y^T Ax < y^T b = 0$ . Computing  $\max y^T Ax$ : with the vector  $\hat{a} = y^T A$ , choosing variable bound  $x_i = l_i$  when  $\hat{a}_i < 0$  and  $x_i = u_i$  when  $\hat{a}_i > 0$  gives the maximal possible value of  $y^T Ax$  for any  $x$  within their bounds.  
  
Some application relies on the alternate conflict  $\min \bar{y}^T Ax > \bar{y}^T b = 0$ . This can be achieved by negating the dual Farkas, i.e.  $\bar{y} = -y$  returned by the solver.  
  
In very rare cases, the solver may fail to return a valid dual Farkas. For example when the LP problem slightly infeasible by tiny amount, which We recommend to study and to repair the infeasibility using FeasRelax instead.
- **PrimalRay**  
Double information.  
  
The primal ray for variables of an unbounded LP problem. Please enable the parameter "ReqFarkasRay" to ensure that the primal ray is available when an LP is unbounded.  
  
For a minimization LP problem in the standard form:  $\min c^T x, Ax = b$  and  $x \geq 0$ , a primal ray vector  $r$  satisfies that  $r \geq 0, Ar = 0$  and  $c^T r < 0$ .

## 9.4 Feasibility relaxation information

- RelaxLB

Double information.

Feasibility relaxation values for lower bounds of columns or rows.

- RelaxUB

Double information.

Feasibility relaxation values for upper bounds of columns or rows.

## 9.5 Methods of accessing information

In different programming interfaces, the ways to access and set information are slightly different. For details, please refer to the corresponding chapters of each programming language API reference manual:

- C API: *C API Functions: Accessing information of problem*
- C# API: *C# API Reference: Information*
- Java API: *Java API Reference: Information*
- Python API: *Python API Reference: Information*





# Chapter 10

## Parameters

Parameters control the operation of the **Cardinal Optimizer**. They can be modified before the optimization begins. Each parameter has its own default value and value range. Before starting the solution, user can set the parameters to different values, so as to put forward specific requirements on the solution algorithm and solution process. Of course, the default settings can also be maintained.

According to the task performed by the solver COPT and the optimization problem solved, it can be divided into different types of parameters.

This chapter will introduce the parameters constants provided by COPT and their meanings.

### 10.1 Limits and tolerances

Table 10.1: Limits and tolerances parameters

Name	Type	Description
<i>TimeLimit</i>	Double	Time limit of the optimization
<i>NodeLimit</i>	Integer	Node limit of the optimization
<i>BarIterLimit</i>	Integer	Iteration limit of barrier method
<i>MatrixTol</i>	Double	Input matrix coefficient tolerance
<i>FeasTol</i>	Double	The feasibility tolerance
<i>DualTol</i>	Double	The tolerance for dual solutions and reduced cost
<i>IntTol</i>	Double	The integrality tolerance for variables
<i>RelGap</i>	Double	The relative gap of optimization
<i>AbsGap</i>	Double	The absolute gap of optimization

- **TimeLimit**

Double parameter.

Time limit of the optimization.

**Default:** 1e20

**Minimal:** 0

**Maximal:** 1e20

- **NodeLimit**

Integer parameter.

Node limit of the optimization.

**Default:** -1 (Choose automatically)

**Minimal:** -1 (Choose automatically)

**Maximal:** INT\_MAX

- BarIterLimit

Integer parameter.

Iteration limit of barrier method.

**Default:** 500

**Minimal:** 0

**Maximal:** INT\_MAX

- MatrixTol

Double parameter.

Input matrix coefficient tolerance.

**Default:** 1e-10

**Minimal:** 0

**Maximal:** 1e-7

- FeasTol

Double parameter.

The feasibility tolerance.

**Default:** 1e-6

**Minimal:** 1e-9.

**Maximal:** 1e-4

- DualTol

Double parameter.

The tolerance for dual solutions and reduced cost.

**Default:** 1e-6

**Minimal:** 1e-9

**Maximal:** 1e-4

- IntTol

Double parameter.

The integrality tolerance for variables.

**Default:** 1e-6

**Minimal:** 1e-9

**Maximal:** 1e-1

- RelGap

Double parameter.

The relative gap of optimization.

**Default:** 1e-4

**Minimal:** 0

**Maximal:** DBL\_MAX

- AbsGap

Double parameter.

The absolute gap of optimization.

**Default:** 1e-6

**Minimal:** 0

**Maximal:** DBL\_MAX

## 10.2 Presolving and scaling

Table 10.2: Presolving and scaling parameters

Name	Type	Description
<i>Presolve</i>	Integer	Level of presolving before solving a model
<i>Scaling</i>	Integer	Whether to perform scaling before solving a problem
<i>Dualize</i>	Integer	Whether to dualize a problem before solving it

- **Presolve**

Integer parameter.

Level of presolving before solving a model.

**Default:** -1

**Possible values:**

- 1: Choose automatically.
- 0: Off
- 1: Fast
- 2: Normal
- 3: Aggressive

- **Scaling**

Integer parameter.

Whether to perform scaling before solving a problem.

**Default:** -1

**Possible values:**

- 1: Choose automatically.
- 0: No scaling.
- 1: Apply scaling.

- **Dualize**

Integer parameter.

Whether to dualize a problem before solving it.

**Default:** -1

**Possible values:**

- 1: Choose automatically.
- 0: No dualizing.
- 1: Dualizing the problem.

## 10.3 Linear programming related

Table 10.3: Linear programming related parameters

Name	Type	Description
<i>LpMethod</i>	Integer	Method to solve the LP problem
<i>DualPrice</i>	Integer	Specifies the dual simplex pricing algorithm
<i>DualPerturb</i>	Integer	Whether to allow the objective function perturbation when using the dual simplex method
<i>BarHomogeneous</i>	Integer	Whether to use homogeneous self-dual form in barrier
<i>BarOrder</i>	Integer	Barrier ordering algorithm
<i>Crossover</i>	Integer	Whether to use crossover
<i>ReqFarkasRay</i>	Integer	Advanced topic. Whether to compute the dual Farkas or primal ray when the LP is infeasible or unbounded

- **LpMethod**

Integer parameter.

Method to solve the LP problem.

**Default:** -1

**Possible values:**

- 1: Choose automatically.
- 1: Dual simplex.
- 2: Barrier.
- 3: Crossover.
- 4: Concurrent (Use simplex and barrier simultaneously).

- **DualPrice**

Integer parameter.

Specifies the dual simplex pricing algorithm.

**Default:** -1

**Possible values:**

- 1: Choose automatically.
- 0: Using Devex pricing algorithm.
- 1: Using dual steepest-edge pricing algorithm.

- **DualPerturb**

Integer parameter.

Whether to allow the objective function perturbation when using the dual simplex method.

**Default:** -1

**Possible values:**

- 1: Choose automatically.
- 0: No perturbation.
- 1: Allow objective function perturbation.

- **BarHomogeneous**

Integer parameter.

Whether to use homogeneous self-dual form in barrier.

**Default:** -1

**Possible values:**

-1: Choose automatically.

0: No.

1: Yes.

- **BarOrder**

Integer parameter.

Barrier ordering algorithm.

**Default:** -1

**Possible values:**

-1: Choose automatically.

0: Approximate Minimum Degree (AMD).

1: Nested Dissection (ND).

- **Crossover**

Integer parameter.

Whether to use crossover.

**Default:** 1

**Possible values:**

-1: Choose automatically.

Only run crossover when the LP solution is not primal-dual feasible.

0: No.

1: Yes.

- **ReqFarkasRay**

Integer parameter.

Advanced topic. Whether to compute the dual Farkas or primal ray when the LP is infeasible or unbounded.

**Default:** 0

**Possible values:**

0: No.

1: Yes.

## 10.4 Semidefinite programming related

- SDPMethod

Integer parameter.

Method to solve the SDP problem.

**Default:** -1

**Possible values:**

- 1: Choose automatically.
- 0: Primal-Dual method.
- 1: ADMM method.
- 2: Dual method.

## 10.5 Integer programming related

Table 10.4: Integer programming related parameters

Name	Type	Description
<i>CutLevel</i>	Integer	Level of cutting-planes generation
<i>RootCutLevel</i>	Integer	Level of cutting-planes generation of root node
<i>TreeCutLevel</i>	Integer	Level of cutting-planes generation of search tree
<i>RootCutRounds</i>	Integer	Rounds of cutting-planes generation of root node
<i>NodeCutRounds</i>	Integer	Rounds of cutting-planes generation of search tree node
<i>HeurLevel</i>	Integer	Level of heuristics
<i>RoundingHeurLevel</i>	Integer	Level of rounding heuristics
<i>DivingHeurLevel</i>	Integer	Level of diving heuristics
<i>SubMipHeurLevel</i>	Integer	Level of Sub-MIP heuristics
<i>StrongBranching</i>	Integer	Level of strong branching
<i>ConflictAnalysis</i>	Integer	Whether to perform conflict analysis
<i>MipStartMode</i>	Integer	Mode of MIP starts
<i>MipStartNodeLimit</i>	Integer	Limit of nodes for MIP start sub-MIPs

- CutLevel

Integer parameter.

Level of cutting-planes generation.

**Default:** -1

**Possible values:**

- 1: Choose automatically.
- 0: Off
- 1: Fast
- 2: Normal
- 3: Aggressive

- RootCutLevel

Integer parameter.

Level of cutting-planes generation of root node.

**Default:** -1

**Possible values:**

- 1: Choose automatically.
- 0: Off
- 1: Fast
- 2: Normal
- 3: Aggressive

- **TreeCutLevel**

Integer parameter.

Level of cutting-planes generation of search tree.

**Default:** -1

**Possible values:**

- 1: Choose automatically.
- 0: Off
- 1: Fast
- 2: Normal
- 3: Aggressive

- **RootCutRounds**

Integer parameter.

Rounds of cutting-planes generation of root node.

**Default:** -1 (Choose automatically)

**Minimal:** -1 (Choose automatically)

**Maximal:** INT\_MAX

- **NodeCutRounds**

Integer parameter.

Rounds of cutting-planes generation of search tree node.

**Default:** -1 (Choose automatically)

**Minimal:** -1 (Choose automatically)

**Maximal:** INT\_MAX

- **HeurLevel**

Integer parameter.

Level of heuristics.

**Default:** -1

**Possible values:**

- 1: Choose automatically.
- 0: Off
- 1: Fast
- 2: Normal
- 3: Aggressive

- **RoundingHeurLevel**



Integer parameter.

Level of rounding heuristics.

**Default:** -1

**Possible values:**

- 1: Choose automatically.
- 0: Off
- 1: Fast
- 2: Normal
- 3: Aggressive

- **DivingHeurLevel**

Integer parameter.

Level of diving heuristics.

**Default:** -1

**Possible values:**

- 1: Choose automatically.
- 0: Off
- 1: Fast
- 2: Normal
- 3: Aggressive

- **SubMipHeurLevel**

Integer parameter.

Level of Sub-MIP heuristics.

**Default:** -1

**Possible values:**

- 1: Choose automatically.
- 0: Off
- 1: Fast
- 2: Normal
- 3: Aggressive

- **StrongBranching**

Integer parameter.

Level of strong branching.

**Default:** -1

**Possible values:**

- 1: Choose automatically.
- 0: Off
- 1: Fast
- 2: Normal
- 3: Aggressive

- **ConflictAnalysis**

Integer parameter.

Whether to perform conflict analysis.

**Default:** -1

**Possible values:**

-1: Choose automatically.

0: No

1: Yes

- **MipStartMode**

Integer parameter.

Mode of MIP starts.

**Default:** -1

**Possible values:**

-1: Choose automatically.

0: Do not use any MIP starts.

1: Only load full and feasible MIP starts.

2: Only load feasible ones (complete partial solutions by solving subMIPs).

- **MipStartNodeLimit**

Integer parameter.

Limit of nodes for MIP start sub-MIPs.

**Default:** -1 (Choose automatically)

**Minimal:** -1 (Choose automatically)

**Maximal:** INT\_MAX

## 10.6 Parallel computing related

Table 10.5: Parallel computing related parameters

Name	Type	Description
<i>Threads</i>	Integer	Number of threads to use
<i>BarThreads</i>	Integer	Number of threads used by barrier. If value is -1, the thread count is determined by parameter <b>Threads</b>
<i>SimplexThreads</i>	Integer	Number of threads used by dual simplex. If value is -1, the thread count is determined by parameter <b>Threads</b>
<i>CrossoverThreads</i>	Integer	Number of threads used by crossover. If value is -1, the thread count is determined by parameter <b>Threads</b>
<i>MipTasks</i>	Integer	Number of MIP tasks in parallel

- **Threads**

Integer parameter.

Number of threads to use.

**Default:** -1 (Choose automatically)

**Minimal:** -1 (Choose automatically)

**Maximal:** 128

- **BarThreads**

Integer parameter.

Number of threads used by barrier. If value is -1, the thread count is determined by parameter **Threads**.

**Default:** -1

**Minimal:** -1

**Maximal:** 128

- **SimplexThreads**

Integer parameter.

Number of threads used by dual simplex. If value is -1, the thread count is determined by parameter **Threads**.

**Default:** -1

**Minimal:** -1

**Maximal:** 128

- **CrossoverThreads**

Integer parameter.

Number of threads used by crossover. If value is -1, the thread count is determined by parameter **Threads**.

**Default:** -1

**Minimal:** -1

**Maximal:** 128

- **MipTasks**

Integer parameter.

Number of MIP tasks in parallel.

**Default:** -1 (Choose automatically)

**Minimal:** -1 (Choose automatically)

**Maximal:** 256

## 10.7 IIS computation related

- **IISMethod**

Integer parameter.

Method for IIS computation.

**Default:** -1

**Possible values:**

-1: Choose automatically.

0: Find smaller IIS.

1: Find IIS quickly.

## 10.8 Feasibility relaxation related

- **FeasRelaxMode**

Integer parameter.

Method for feasibility relaxation.

**Default:** 0

**Possible values:**

- 0: Minimize sum of violations.
- 1: Optimize original objective function under minimal sum of violations.
- 2: Minimize number of violations.
- 3: Optimize original objective function under minimal number of violations.
- 4: Minimize sum of squared violations.
- 5: Optimize original objective function under minimal sum of squared violations.

## 10.9 Parameter Tuning related

Table 10.6: Tuner related parameters

Name	Type	Description
<i>TuneTimeLimit</i>	Double	Time limit for parameter tuning
<i>TuneTargetTime</i>	Double	Time target for parameter tuning
<i>TuneTargetRelGap</i>	Double	Optimal relative tolerance target for parameter tuning
<i>TuneMethod</i>	Integer	Method for parameter tuning
<i>TuneMode</i>	Integer	Mode for parameter tuning
<i>TuneMeasure</i>	Integer	Parameter tuning result calculation method
<i>TunePermutates</i>	Integer	Permutations for each trial parameter set
<i>TuneOutputLevel</i>	Integer	Parameter tuning log output intensity

- **TuneTimeLimit**

Double parameter.

Time limit for parameter tuning. A value of 0 indicates that the solver is set automatically.

**Default value** 0

**Minimum** 0

**Maximum** 1e20

- **TuneTargetTime**

Double parameter.

Time target for parameter tuning.

**default** 1e-2

**Minimum** 0

**Maximum** DBL\_MAX

- **TuneTargetRelGap**

Double parameter.

Optimal relative tolerance target for parameter tuning.

**default** 1e-4

**Minimum** 0

**Maximum** DBL\_MAX

- **TuneMethod**

Integer parameter.

Method for parameter tuning.

**default** -1

**optional value**

-1: Choose automatically.

0: Greedy search strategy.

1: Broader search strategy.

- **TuneMode**

Integer parameter.

Mode for parameter tuning.

**default** -1

**optional value**

-1: Choose automatically.

0: Solving time.

1: Optimal relative tolerance.

2: Objective function value.

3: The lower bound of the objective function value.

- **TuneMeasure**

Integer parameter.

Parameter tuning result calculation method.

**default** -1

**optional value**

-1: Choose automatically.

0: Calculate the average value.

1: Calculate the maximum value.

- **TunePermutes**

Integer parameter.

Permutations for each trial parameter set. A value of 0 indicates that the solver is automatically set.

**Default value** 0

**Minimum** 0

**Maximum** INT\_MAX

- **TuneOutputLevel**

Integer parameter.

Parameter tuning log output intensity.

**Default value** 2

**optional value**

- 0: No output of tuning log.
- 1: Output only a summary of the improved parameters.
- 2: Output a summary of each tuning attempt.
- 3: Output a detailed log of each tuning attempt.

## 10.10 Other parameters

- **Logging**

Integer parameter.

Whether to print optimization logs.

**Default:** 1

**Possible values:**

- 0: No optimization logs.
- 1: Print optimization logs.

- **LogToConsole**

Integer parameter.

Whether to print optimization logs to console.

**Default:** 1

**Possible values:**

- 0: No optimization logs to console.
- 1: Print optimization logs to console.

## 10.11 Methods of accessing and setting parameters

In different programming interfaces, the ways to access and set information are slightly different. For details, please refer to the corresponding chapters of each programming language API reference manual:

- C API: *C API Functions: Accessing and setting parameters*
- C++ API: *C++ API Reference: Parameters*
- C# API: *C# API Reference: Parameters*
- Java API: *Java API Reference: Parameters*
- Python API: *Python API Reference: Parameters*



# Chapter 11

## MIP Starts

### 11.1 Utilities of MIP Starts

#### 11.1.1 Set and Load MIP Starts

For MIP problems, COPT provides methods to specify initial solution value(s) for a single variable or set of variables and load it/them into model. The parameters that can be specified are:

- **vars** :variables
- **startvals** :variables' solution values

The functions in different APIs are shown in [Table 11.1](#):

Table 11.1: Functions for setting MIP starts

API	Function
C	<code>COPT_AddMipStart</code>
C++	<code>Model::SetMipStart()</code>
C#	<code>Model.SetMipStart()</code>
Java	<code>Model.setMipStart()</code>
Python	<code>Model.setMipStart(vars, startvals)</code>

---

#### Note

- Regarding the operations of MIP starts, their **function names**, **calling methods**, and **parameter names** are slightly different in different programming interfaces, but the implementation of functions and meanings of parameter are the same.
  - For more details on setting initial solutions in C, please refer to function `COPT_AddMipStart` in chapter *C API Function: MIP start utilities*.
  - You may want to call this method several times to input the MIP start. Please call `loadMipStart()` once when the input is done.
-



### 11.1.2 Read and Write MIP Starts

COPT provides functions for file read/write. It can read variable values from a MIP start file (".mst") as the initial solution values of variables, and write the solving results or existing initial solution to a MIP start file (".mst"). The functions for reading and writing MIP start file in different APIs are shown in Table 11.2:

Table 11.2: Functions for reading and writing MIP starts

API	read MIP starts	write MIP starts
C	COPT_ReadMst	COPT_WriteMst
C++	Model::ReadMst	Model::WriteMst
C#	Model.ReadMst()	Model.WriteMst()
Java	Model.readMst()	Model.writeMst()
Python	Model.readMst()	Model.writeMst()

## 11.2 Related Parameters

COPT provides the following parameters that control how MIP starts (initial solutions) are handled inside.

- **MipStartMode**

Integer parameter.

Mode of MIP starts, i.e. how MIP starts are handled.

**Default** -1

**Possible values:**

-1: Automatic.

0: Do not use any MIP starts.

1: Only load full and feasible MIP starts.

2: Only load feasible ones (complete partial solutions by solving subMIPs).

**Note:** If the provided initial solution is incomplete (partial), **MipStartMode=2** needs to be set, otherwise the initial solution will be rejected.

- **MipStartNodeLimit**

Integer parameter.

Limit of nodes for MIP start sub-MIPs.

**Default:** -1

**Minimal:** -1

**Maximal:** INT\_MAX

## 11.3 Log of MIP starts

### 11.3.1 MIP starts are accepted

1.A (better) initial solution was provided

```
Initial MIP solution # 1 with objective value 9.73987 was accepted
```

2.A partial initial solution was provided, and set MipStartMode=2. (complete it by solving a subMIP)

```
Loading 1 initial MIP solution
Extending partial MIP solution # 1
Extending partial MIP solution # 1 succeed (0.2s)
Initial MIP solution # 1 with objective value 9.66566 was accepted
```

### 11.3.2 MIP starts are rejected

1.The provided initial solution was infeasible

```
Initial MIP solution # 1 was rejected: Primal Inf 1.00e+00 Int Inf 1.78e-15
```

2.The provided initial solution was not better than the current best one

```
Initial MIP solution # 2 with objective value 10.3312 was rejected (not better)
```

3.The provided initial solution was incomplete (partial), and not set MipStartMode=2

```
Loading 1 initial MIP solution
Initial MIP solution # 1 was rejected: partial
```

4.The provided initial solution was incomplete (partial), and COPT failed to find a feasible solution by solving subMIP

```
Loading 1 initial MIP solution
Extending partial MIP solution # 1
Extending partial MIP solution # 1 failed (infeasible)
Initial MIP solution # 1 was rejected: partial
```



## Chapter 12

# MIP Solution Pool

The solver always find multiple feasible solutions in the process of solving a MIP problem with Branch and Bound method. COPT provides a solution pool for MIP problem, from which users can obtain solutions and the corresponding objective function values.

COPT provides functions that users can get the `iSol` th solution's objective function value and solution values (of specified variables) by specifying the following parameters.

- `iSol`: Index of the solution to obtain. (0-based)
- `vars`: Variables

The functions in different APIs are shown in [Table 12.1](#):

Table 12.1: Get solutions and objective values from solution pool

API	Get solution	Get objective value
C	<code>COPT_GetSolution</code>	<code>COPT_GetPoolObjVal</code>
C++	<code>Model::GetPoolSolution()</code>	<code>Model.GetPoolSolution()</code>
C#	<code>Model.GetPoolSolution()</code>	<code>Model.GetPoolSolution()</code>
Java	<code>Model.getPoolSolution()</code>	<code>Model.getPoolObjVal()</code>
Python	<code>Model.getPoolSolution()</code>	<code>Model.getPoolObjVal()</code>

**Note:** Regarding the operations of solution pool, their **function names**, **calling methods**, and **parameter names** are slightly different in different programming interfaces, but the implementation of functions and meanings of parameter are the same.

### Attributes of Solution Pool

- `PoolSols`
  - Integer attribute
  - Number of solutions in the solution pool.



# Chapter 13

## COPT Tuner

### 13.1 Introduction

The COPT Tuner is a tool designed for tuning performance automatically for all supported problem types.

- For MIP problems, it supports tuning for solving time, relative gap, best objective value and objective bound;
- For non-MIP problems, only solving time supported.

The workflow of the COPT tuning tool is as follows:

1. First, perform benchmark calculation and allow users to customize benchmark calculation parameters;
2. Next, generate tuning parameters one by one, and find parameter combinations that improve the solution performance through parameter tuning calculations.

### 13.2 Related parameters

Firstly, the tuner will do a baseline run, possibly with fixed parameters from users, then move to the improvement run, where the tuner will generate trial parameter sets and search for parameters that can improve the performance. To summarize, the COPT Tuner provides the following capabilities:

Table 13.1: Tuner related parameters

Name	Type	Description
<i>TuneTimeLimit</i>	Double	Time limit for parameter tuning
<i>TuneTargetTime</i>	Double	Time target for parameter tuning
<i>TuneTargetRelGap</i>	Double	Optimal relative tolerance target for parameter tuning
<i>TuneMethod</i>	Integer	Method for parameter tuning
<i>TuneMode</i>	Integer	Mode for parameter tuning
<i>TuneMeasure</i>	Integer	Parameter tuning result calculation method
<i>TunePermutates</i>	Integer	Permutations for each trial parameter set
<i>TuneOutputLevel</i>	Integer	Parameter tuning log output intensity

## 13.3 Provided capabilities

The COPT tuning tool provides the following capabilities:

### 13.3.1 Tuning method

Controlled by the parameter **TuneMethod**, options are: greedy search and aggressive search. The greedy method tries to find better parameter settings within limited number of trials, while the aggressive method search for more combinations and has much larger search space than the greedy one, and can potentially find even better parameter settings at the expense of more elapsed tuning time. Default setting is to choose automatically.

- Greedy search method: It is expected to optimize the calculation with fewer parameters and find better parameter settings;
- Extensive search method: try more parameter combinations, have a larger search space, and are more likely to find better parameter settings, but also consume more tuning time.

The possible values and corresponding meanings of the parameter **TuneMethod** are as follows. By setting it to a different value, the search method can be selected. The default setting is automatic selection.

- -1: automatic selection
- 0: Greedy search strategy
- 1: Broader search strategy

### 13.3.2 Tuning mode

Controlled by the parameter **TuneMode**, options are: solving time, relative gap, objective value and objective bound. For MIP problem, by default, if the baseline run is not solved to optimality within specified time limit, tuner will change tuning mode to relative gap automatically. Default setting is to choose automatically.

- 0: Solving time
- 1: Optimal relative tolerance
- 2: Objective function value
- 3: Lower bound of objective function value

**Note:** For integer programming problems, by default, if the benchmark calculation does not optimize the model within the given time limit, the tuning tool will automatically switch the tuning mode to the optimal relative tolerance .

### 13.3.3 Tuning permutations

Controlled by the parameter **TunePermutess**. Tuner allow users to run more permutations for each trial parameter set to evaluate performance variability. Default setting is to choose automatically.

### 13.3.4 Tuning measure

Controlled by the parameter **TuneMeasure**, options are: by average or maximum. When users run more permutations for each trial, tuner will compute the aggregated tuning value by this measure. Default setting is to choose automatically.

- 0: Calculate the average
- 1: Calculate the maximum value

### 13.3.5 Tuning targets

Controlled by the parameter **TuneTargetTime** and **TuneTargetRelGap**. Tuner enables users to specify target solving time or relative gap for tuning, when tuner finds out parameters that satisfy the specified target, it will stop tuning. For solving time, default value is 0.01 seconds, while for relative gap, default value is 1e-4.

### 13.3.6 Tuning output

Controlled by the parameter **TuneOutputLevel**, options are: no output, show summary for improved trials, show summary for each trial and show detailed log for each trial. Default setting is to show summary for each trial.

- 0: Do not output tuning log
- 1: Output only a summary of the improved parameters
- 2: Output a summary of each tuning attempt
- 3: Output a detailed log of each tuning attempt

### 13.3.7 TuneTimeLimit

Controlled by the parameter **TuneTimeLimit**. This parameter is used to control the overall time limit for the improvement run of tuning. Default setting is to choose automatically.

### 13.3.8 User defined parts

- User defined parameters

The tool enables users to set parameters for the baseline run, which will also be used as fixed parameters for each trial run. Tuner will not tune parameters in the fixed parameters.

- User defined MIP start

The COPT tuner enables users to set MIP start for the baseline run, which will also be used for each trial run also.

- User defined tuning file

The COPT tuner enables users to read tuning parameter sets from tuning file, if so, the tuner will try to tune from the given parameter sets, otherwise, tuner will generate tuning parameter sets automatically. The tuning file is similar to parameter file, with the difference that it allow multiple values for each parameter name.

**Note:** The COPT tuning file has a similar format to the COPT parameter file, except that the tuning file allows multiple values to be specified for a single parameter.



### 13.3.9 Load or writing tuning parameter

After the parameter tuning is completed, the number of parameter tuning results can be obtained through the attribute `TuneResults`, and the tuning results of the specified number can also be loaded into the model or written into the parameter file.

COPT can output the parameter tuning results of the specified number to the parameter file (".par"). The parameters that need to be specified are:

- `idx`: parameter tuning result number
- `filename`: file name

The corresponding functions in different programming interfaces are as follows:

Table 13.2: functions for writing parameter tuning results in different interfaces

API	function
C	<code>COPT_WriteTuneParam</code>
C++	<code>Model::WriteTuneParam()</code>
C#	<code>Model.WriteTuneParam()</code>
Java	<code>Model.writeTuneParam()</code>
Python	<code>Model.writeTuneParam()</code>

## 13.4 Example

For example, to tune model "foo.mps" from command line for solving time with COPT command line tool, the commands are:

```
copt_cmd -c "read foo.mps; tune; exit"
```

To use the tuner in API such as Python, the codes are:

```
env = Envr()
m = env.createModel()
m.read("foo.mps")
m.tune()
```

# Chapter 14

## FAQs

### 14.1 Installation and Licensing Configuration Related

- **Q:** What is the reason for the error `invalid username` when configuring the license?

**A:** This error indicates that the username was incorrectly filled in when applying, and you can re-fill the form with the correct username to apply. For information on how to obtain username under different operating systems, please refer to the [Solver COPT application page](#), please remark in the application reason with **“The username is incorrectly filled in, reapply”**. we will issue new license for the correct username.

- **Q:** After downloading COPT, an antivirus software installed on the computer reports a virus and automatically isolates it.

**A:** The COPT software downloaded from the COPT official download link is the official version, which has not been developed with any suspicious virus behavior. It can be determined that the anti-virus software is falsely reporting. Please temporarily close the anti-virus software before downloading it.

- **Q:** After validating the license (executing `copt_licgen -v`), it reports an error: `Missing Files or Invalid Signature`.

**A:** This type of error indicates that the license file configuration fails. Please refer to [Installation Instructions: Configuring License File](#) to check whether the steps for configuring the license file are correctly followed. Common reasons are as follows:

1. The license file in the current working directory is not compatible with the version of COPT (for example: the license is version 4.0, while the COPT is version 5.0), please check the `VERSION` in `"license.dat"` to confirm whether the major version is the same, if not, please go to the [Solver COPT application page](#) to re-apply, and we will issue you the latest license.
2. In Windows system, if the COPT software is installed in the system disk (usually C) in a non-user directory (eg: the default installation path `"C:\Program Files\copt60"`), you need to **open the command line window with administrator privileges** and execute the license acquisition command `copt_licgen` again.

- **Q:** I have already installed an old version of the COPT Python interface ( `coptpy` ), how do I upgrade to the new version?

**A:** Please enter: `pip install --upgrade coptpy` in the terminal.

- **Q:** In the Python IDE, when debugging, a variable `not defined` warning is reported, or a wavy line appears below the variable in the code, what is the reason?

**A:** Currently `coptpy` supports type hints, please enter `pip install coptpy-stubs` in the terminal to download and install `coptpy-stubs` to solve this problem. After successfully installed, in the

IDE when writing code in, you will be prompted for variable name completion and possible values for function parameters.

### 14.1.1 MacOS System

- **Q:** When calling `coptpy` on MacOS, an error is reported: `ImportError: from .coptpywrap import * symbol not found in flat namespace`.

**A:** This error is due to the mismatch between `coptpy` and Anaconda's architecture on MacOS. Such as `coptpy` is the M1 version, and Anaconda is the x86 version, you can install the M1 version of Anaconda to solve this problem.

- **Q:** When the license is configured in the MacOS system, the `copt_licgen` command is executed in the terminal, and an error is reported: `command not found: copt_licgen`.

**A:** This error is because the relevant environment variables of COPT are not configured. In the MacOS system, you need to configure the environment variables after installing COPT. Please refer to Installation Instructions: MacOS System chapter to obtain detailed installation instructions.

- **Q:** When manually configuring environment variables, I copy content directly from the document to `.zshrc` file or `.bash_profile` file, causing the configuration to fail.

**A:** Due to the document encoding problem, the above environment variables cannot be directly copied to the corresponding file, and the contents of the environment variables need to be manually entered.

### 14.1.2 Windows System

- **Q:** In Windows system, when executing `copt_licgen` to generate the license file, an error is reported that the license file cannot be written to the hard disk, and the error message is: `error opening file`.

**A:** If the COPT software is installed in the system disk (usually C) in a non-user directory (eg: the default installation path "C:\Program Files\copt60"), you need to **open the command line window with administrator privileges** and execute the license acquisition command `copt_licgen`, in order to normally write the license file to the C drive. Administrator privileges are not required to execute permission acquisition commands under user directories such as "C:\Users\shanshu".

- **Q:** In Windows system, when installing COPT Python interface via command `pip install coptpy`, an error is displayed: `could not find a version, no matching distribution`, what is the reason?

**A:** Please do not use Python installed through Microsoft Store, it is recommended to download from [Anaconda distribution](#) or [Python official distribution](#) Download Python.

- **Q:** In Windows system, when installing COPT Python interface through COPT installation package ( `python setup.py install` ), an error `could not create build: access denied` is reported.

**A:** If COPT is installed in the system disk (usually C) in a non-user directory (eg: the default installation path "C:\Program Files\copt60", you need to first **Open the command line window with administrator privileges** and execute the command `python setup.py install`.

## 14.2 Modeling and Solving Functions Related

- **Q:** How to deal with the situation where the model is not feasible?

**A:** COPT provides functions to calculate IIS and feasible relaxation to analyze the reasons for model infeasibility: Computing IIS will obtain the minimum set of infeasible constraints and variables, and feasibility relaxation attempts to make the model feasible with minimal changes. Please see the Infeasible Model Handling chapter for details.



# Chapter 15

## C API Reference

The **Cardinal Optimizer** provides a C API library for advanced usage. This section documents all the COPT constants, API functions, parameters and attributes listed in `copt.h`.

### 15.1 Constants

There are two types of constants. One for constructing models, such as optimization directions, constraint senses or variable types. One for accessing solution results, such as API return code, basis status and LP status.

#### 15.1.1 Optimization directions

For different optimization scenarios, it may be required to either maximize or minimize the objective function. There are two optimization directions:

- `COPT_MINIMIZE`

For minimizing the objective function.

- `COPT_MAXIMIZE`

For maximizing the objective function.

The optimization direction is automatically set when reading in a problem from file. It can also be set explicitly using `COPT_SetObjSense`.

#### 15.1.2 Infinity

In COPT, the infinite bound is represented by a large value, which can be set using the double parameter `COPT_DBLPARAM_INFBOUND`, whose default value is also available as a constant:

- `COPT_INFINITY`

The default value (`1e30`) of the infinite bound.

### 15.1.3 Undefined Value

In COPT, the undefined value is represented by another large value. For example, the default solution value of MIP start is set to a constant:

- COPT\_UNDEFINED  
Undefined value( $1e40^+$ ).

### 15.1.4 Constraint senses

**NOTE:** Using constraint senses is supported by COPT but not recommended. We recommend defining constraints using explicit lower and upper bounds.

Traditionally, for optimization models, constraints are defined using **senses**. The most common constraint senses are:

- COPT\_LESS\_EQUAL  
For constraint in the form of  $g(x) \leq b$
- COPT\_GREATER\_EQUAL  
For constraint in the form of  $g(x) \geq b$
- COPT\_EQUAL  
For constraint in the form of  $g(x) = b$

In addition, there are two less used constraint senses:

- COPT\_FREE  
For unconstrained expression
- COPT\_RANGE  
For constraints with both lower and upper bounds in the form of  $l \leq g(x) \leq u$ .  
Please refer to documentation of COPT\_LoadProb regarding how to use COPT\_RANGE to define a constraints with both lower and upper bounds.

### 15.1.5 Variable types

Variable types are used for defining whether a variable is continuous or integral.

- COPT\_CONTINUOUS  
Non-integer continuous variables
- COPT\_BINARY  
Binary variables
- COPT\_INTEGER  
Integer variables

### 15.1.6 SOS-constraint types

SOS constraint (Special Ordered Set) is a kind of special constraint that places restrictions on the values that a set of variables can take.

COPT currently support two types of SOS constraints, one is SOS1 constraint, where at most one variable in the constraint is allowed to take a non-zero value, the other is SOS2 constraint, where at most two variables in the constraint are allowed to take non-zero value, and those non-zero variables must be contiguous. Variables in SOS constraints are allowed to be continuous, binary and integer.

- COPT\_SOS\_TYPE1  
SOS1 constraint
- COPT\_SOS\_TYPE2  
SOS2 constraint

### 15.1.7 Indicator constraint

Indicator constraint is a kind of logical constraints, is uses a binary variable  $y$  as the indicator variable, and implies whether the linear constraint  $a^T x \leq b$  is valid based on value of variable  $y$ . The canonical form of an indicator constraint is:

$$y = f \rightarrow a^T x \leq b \quad (15.1)$$

Where  $f \in \{0, 1\}$ . If  $y = f$ , the linear constraint is valid. Otherwise if  $y \neq f$ , the linear constraint is invalid. The sense of the linear constraint can be  $\leq$ ,  $\geq$  and  $=$ .

### 15.1.8 Second-Order-Cone constraint

The Second-Order-Cone (SOC) constraint is a special type of quadratic constraint, currently, COPT support two types of SOC constraint, which includes:

- COPT\_CONE\_QUAD : Regular cone

$$Q^n = \left\{ x \in \mathbb{R}^n \mid x_0 \geq \sqrt{\sum_{i=1}^{n-1} x_i^2} \right\} \quad (15.2)$$

- COPT\_CONE\_RQUAD : Rotated cone

$$Q_r^n = \left\{ x \in \mathbb{R}^n \mid 2x_0x_1 \geq \sqrt{\sum_{i=2}^{n-1} x_i^2}, x_0 \geq 0, x_1 \geq 0 \right\} \quad (15.3)$$

### 15.1.9 Quadratic objective function

Besides linear objective function, COPT also supports general convex quadratic objective function.

The mathematical form is:

$$x^T Q x + c^T x \quad (15.4)$$

Where,  $x$  is an array of variables,  $Q$  is the quadratic part of the quadratic objective function and  $c$  is the linear part.



### 15.1.10 Quadratic constraint

Besides the special type of quadratic constraint, Second-Order-Cone (SOC) constraint, COPT also supports general convex quadratic constraint.

The mathematical form is:

$$x^T Q x + q^T x \leq b \quad (15.5)$$

Where,  $x$  is an array of variables,  $Q$  is the quadratic part of the quadratic constraint and  $c$  is the linear part.

### 15.1.11 Basis status

For an LP problem with  $n$  variables and  $m$  constraints, the constraints are treated as slack variables *internally*, resulting in  $n + m$  variables. When solving an LP problem using the simplex method, the simplex method fixes  $n$  variables at one of their bounds, and then computes solutions for the other  $m$  variables. The  $m$  variables with computed solution are called *basic* variables, and the other  $n$  variables are called *non-basic* variables. The simplex progress and its final solution can be defined using the basis status of all the variables and constraints.

The basis status supported by COPT are:

- COPT\_BASIS\_LOWER  
The variable is non-basic at its lower bound.
- COPT\_BASIS\_BASIC  
The variable is basic.
- COPT\_BASIS\_UPPER  
The variable is non-basic at its upper bound.
- COPT\_BASIS\_SUPERBASIC  
The variable is non-basic but not any of its bounds.
- COPT\_BASIS\_FIXED  
The variable is non-basic and fixed at its bound.

### 15.1.12 LP solution status

The solution status of an LP problem is called LP status, which can be obtained using integer attribute COPT\_INTATTR\_LPSTATUS.

Possible LP status values are:

- COPT\_LPSTATUS\_UNSTARTED  
The LP optimization is not started yet.
- COPT\_LPSTATUS\_OPTIMAL  
The LP problem is solved to optimality.
- COPT\_LPSTATUS\_INFEASIBLE  
The LP problem is infeasible.
- COPT\_LPSTATUS\_UNBOUNDED  
The LP problem is unbounded.
- COPT\_LPSTATUS\_NUMERICAL

Numerical trouble encountered.

- `COPT_LPSTATUS_TIMEOUT`

The LP optimization is stopped because of time limit.

- `COPT_LPSTATUS_UNFINISHED`

The LP optimization is stopped but the solver cannot provide a solution because of numerical difficulties.

- `COPT_LPSTATUS_IMPRECISE`

The solution is imprecise.

- `COPT_LPSTATUS_INTERRUPTED`

The LP optimization is stopped by user interrupt.

### 15.1.13 MIP solution status

The solution status of an MIP problem is called MIP status, which can be obtained using integer attribute `COPT_INTATTR_MIPSTATUS`.

Possible MIP status values are:

- `COPT_MIPSTATUS_UNSTARTED`

The MIP optimization is not started yet.

- `COPT_MIPSTATUS_OPTIMAL`

The MIP problem is solved to optimality.

- `COPT_MIPSTATUS_INFEASIBLE`

The MIP problem is infeasible.

- `COPT_MIPSTATUS_UNBOUNDED`

The MIP problem is unbounded.

- `COPT_MIPSTATUS_INF_OR_UNB`

The MIP problem is infeasible or unbounded.

- `COPT_MIPSTATUS_NODELIMIT`

The MIP optimization is stopped because of node limit.

- `COPT_MIPSTATUS_TIMEOUT`

The MIP optimization is stopped because of time limit.

- `COPT_MIPSTATUS_UNFINISHED`

The MIP optimization is stopped but the solver cannot provide a solution because of numerical difficulties.

- `COPT_MIPSTATUS_INTERRUPTED`

The MIP optimization is stopped by user interrupt.

### 15.1.14 API function return code

When an API function finishes, it returns an integer **return code**, which indicates whether the API call was finished okay or failed. In case of failure, it specifies the reason of the failure.

Possible COPT API function return codes are:

- **COPT\_RETCODE\_OK**  
The API call finished successfully.
- **COPT\_RETCODE\_MEMORY**  
The API call failed because of memory allocation failure.
- **COPT\_RETCODE\_FILE**  
The API call failed because of file input or output failure.
- **COPT\_RETCODE\_INVALID**  
The API call failed because of invalid data.
- **COPT\_RETCODE\_LICENSE**  
The API call failed because of license validation failure. In this case, further information can be obtained by calling **COPT\_GetLicenseMsg**.
- **COPT\_RETCODE\_INTERNAL**  
The API call failed because of internal error.
- **COPT\_RETCODE\_THREAD**  
The API call failed because of thread error.
- **COPT\_RETCODE\_SERVER**  
The API call failed because of remote server error.
- **COPT\_RETCODE\_NONCONVEX**  
The API call failed because of problem is nonconvex.

### 15.1.15 Client configuration

For floating and cluster clients, user are allowed to set client configuration parameters, currently available settings are:

- **COPT\_CLIENT\_CLUSTER**  
IP address of cluster server.
- **COPT\_CLIENT\_FLOATING**  
IP address of token server.
- **COPT\_CLIENT\_PASSWORD**  
Password of cluster server.
- **COPT\_CLIENT\_PORT**  
Connection port of token server.
- **COPT\_CLIENT\_WAITTIME**  
Wait time of client.

### 15.1.16 Other constants

- COPT\_BUFFSIZE

Defines the recommended buffer size when obtaining a C-style string message from COPT library. This can be used with, for example, COPT\_GetBanner, COPT\_GetRetcodeMsg etc.

## 15.2 Attributes

### 15.2.1 Problem information

- COPT\_INTATTR\_COLS or "Cols"

Integer attribute.

Number of variables (columns) in the problem.

- COPT\_INTATTR\_PSDCOLS or "PSDCols"

Integer attribute.

Number of PSD variables in the problem.

- COPT\_INTATTR\_ROWS or "Rows"

Integer attribute.

Number of constraints (rows) in the problem.

- COPT\_INTATTR\_ELEMS or "Elems"

Integer attribute.

Number of non-zero elements in the coefficient matrix.

- COPT\_INTATTR\_QELEMS or "QElems"

Integer attribute.

Number of non-zero quadratic elements in the quadratic objective function.

- COPT\_INTATTR\_PSDELEMS or "PSDElems"

Integer attribute.

Number of PSD terms in objective function.

- COPT\_INTATTR\_SYMMATS or "SymMats"

Integer attribute.

Number of symmetric matrices in the problem.

- COPT\_INTATTR\_BINS or "Bins"

Integer attribute.

Number of binary variables.

- COPT\_INTATTR\_INTS or "Ints"

Integer attribute.

Number of integer variables.

- COPT\_INTATTR\_SOSS or "Soss"

Integer attribute.

Number of SOS constraints.

- COPT\_INTATTR\_CONES or "Cones"

Integer attribute.

Number of Second-Order-Cone constraints.

- COPT\_INTATTR\_QCONSTRS or "QConstrs"

Integer attribute.

Number of quadratic constraints.

- COPT\_INTATTR\_PSDCONSTRS or "PSDConstrs"

Integer attribute.

Number of PSD constraints.

- COPT\_INTATTR\_INDICATORS or "Indicators"

Integer attribute.

Number of indicator constraints.

- COPT\_INTATTR\_OBJSENSE or "ObjSense"

Integer attribute.

The optimization direction.

- COPT\_DBLATTR\_OBJCONST or "ObjConst"

Double attribute.

The constant part of the objective function.

- COPT\_INTATTR\_HASQOBJ or "HasQObj"

Integer attribute.

Whether the problem has quadratic objective function.

- COPT\_INTATTR\_HASPSDOBJ or "HasPSDObj"

Integer attribute.

Whether the problem has PSD terms in objective function.

- COPT\_INTATTR\_ISMIP or "IsMIP"

Integer attribute.

Whether the problem is a MIP.

## 15.2.2 Solution information

- COPT\_INTATTR\_LPSTATUS or "LpStatus"

Integer attribute.

The LP status. Please refer to *Constants: LP solution status* for possible values.

- COPT\_INTATTR\_MIPSTATUS or "MipStatus"

Integer attribute.

The MIP status. Please refer to *Constants: MIP solution status* for possible values.

- COPT\_INTATTR\_SIMPLEXITER or "SimplexIter"

Integer attribute.

Number of simplex iterations performed.

- COPT\_INTATTR\_BARRIERITER or "BarrierIter"

Integer attribute.

Number of barrier iterations performed.

- COPT\_INTATTR\_NODECNT or "NodeCnt"

Integer attribute.

Number of explored nodes.

- COPT\_INTATTR\_POOLSOLS or "PoolSols"

Integer attribute.

Number of solutions in solution pool.

- COPT\_INTATTR\_TUNERESULTS or "TuneResults"

Integer attribute.

Number of parameter tuning results

- COPT\_INTATTR\_HASLPSOL or "HasLpSol"

Integer attribute.

Whether LP solution is available.

- COPT\_INTATTR\_HASBASIS or "HasBasis"

Integer attribute.

Whether LP basis is available.

- COPT\_INTATTR\_HASDUALFARKAS or "HasDualFarkas"

Integer attribute.

Whether the dual Farkas of an infeasible LP problem is available.

- COPT\_INTATTR\_HASPRIMALRAY or "HasPrimalRay"

Integer attribute.

Whether the primal ray of an unbounded LP problem is available.

- COPT\_INTATTR\_HASMIPSOL or "HasMipSol"

Integer attribute.

Whether MIP solution is available.

- COPT\_INTATTR\_IISCOLS or "IISCols"

Integer attribute.

Number of bounds of columns in IIS.

- COPT\_INTATTR\_IISROWS or "IISRows"

Integer attribute.

Number of rows in IIS.

- COPT\_INTATTR\_IISOSS or "IISOSSs"

Integer attribute.

Number of SOS constraints in IIS.

- COPT\_INTATTR\_IISINDICATORS or "IISIndicators"

Integer attribute.

Number of indicator constraints in IIS.

- COPT\_INTATTR\_HASIIS or "HasIIS"

Integer attribute.

Whether IIS is available.

- COPT\_INTATTR\_HASFEASRELAXSOL or "HasFeasRelaxSol"

Integer attribute.

Whether feasibility relaxation solution is available.

- COPT\_INTATTR\_ISMINIIS or "IsMinIIS"

Integer attribute.

Whether the computed IIS is minimal.

- COPT\_DBLATTR\_LPOBJVAL or "LpObjval"

Double attribute.

The LP objective value.

- COPT\_DBLATTR\_BESTOBJ or "BestObj"

Double attribute.

Best integer objective value for MIP.

- COPT\_DBLATTR\_BESTBND or "BestBnd"

Double attribute.

Best bound for MIP.

- COPT\_DBLATTR\_BESTGAP or "BestGap"

Double attribute.

Best relative gap for MIP.

- COPT\_DBLATTR\_FEASRELAXOBJ or FeasRelaxObj

Double attribute.

Feasibility relaxation objective value.

- COPT\_DBLATTR\_SOLVINGTIME or "SolvingTime"

Double attribute.

The time spent for the optimization (in seconds).

## 15.3 Information

### 15.3.1 Problem information

- COPT\_DBLINFO\_OBJ or "Obj"

Double information.

Objective cost of columns.

- COPT\_DBLINFO\_LB or "LB"

Double information.

Lower bounds of columns or rows.

- COPT\_DBLINFO\_UB or "UB"

Double information.

Upper bounds of columns or rows.

### 15.3.2 Solution information

- COPT\_DBLINFO\_VALUE or "Value"  
Double information.  
Solution of columns.
- COPT\_DBLINFO\_SLACK or "Slack"  
Double information.  
Solution of slack variables, also known as activities of constraints. Only available for LP problem.
- COPT\_DBLINFO\_DUAL or "Dual"  
Double information.  
Solution of dual variables. Only available for LP problem.
- COPT\_DBLINFO\_REDCOST or "RedCost"  
Double information.  
Reduced cost of columns. Only available for LP problem.

### 15.3.3 Dual Farkas and primal ray

Advanced topic. When an LP is infeasible or unbounded, the solver can return the dual Farkas or primal ray to prove it.

- COPT\_DBLINFO\_DUALFARKAS or "DualFarkas"  
Double information.  
  
The dual Farkas for constraints of an infeasible LP problem. Please enable the parameter "ReqFarkasRay" to ensure that the dual Farkas is available when the LP is infeasible.  
  
Without loss of generality, the concept of the dual Farkas can be conveniently demonstrated using an LP problem with general variable bounds and equality constraints:  $Ax = 0$  and  $l \leq x \leq u$ . When the LP is infeasible, a dual Farkas vector  $y$  can prove that the system has conflict that  $\max y^T Ax < y^T b = 0$ . Computing  $\max y^T Ax$ : with the vector  $\hat{a} = y^T A$ , choosing variable bound  $x_i = l_i$  when  $\hat{a}_i < 0$  and  $x_i = u_i$  when  $\hat{a}_i > 0$  gives the maximal possible value of  $y^T Ax$  for any  $x$  within their bounds.  
  
Some application relies on the alternate conflict  $\min \bar{y}^T Ax > \bar{y}^T b = 0$ . This can be achieved by negating the dual Farkas, i.e.  $\bar{y} = -y$  returned by the solver.  
  
In very rare cases, the solver may fail to return a valid dual Farkas. For example when the LP problem slightly infeasible by tiny amount, which We recommend to study and to repair the infeasibility using FeasRelax instead.
- COPT\_DBLINFO\_PRIMALRAY or "PrimalRay"  
Double information.  
  
The primal ray for variables of an unbounded LP problem. Please enable the parameter "ReqFarkasRay" to ensure that the primal ray is available when an LP is unbounded.  
  
For a minimization LP problem in the standard form:  $\min c^T x, Ax = b$  and  $x \geq 0$ , a primal ray vector  $r$  satisfies that  $r \geq 0, Ar = 0$  and  $c^T r < 0$ .



### 15.3.4 Feasibility relaxation information

- COPT\_DBLINFO\_RELAXLB or "RelaxLB"  
Double information.  
Feasibility relaxation values for lower bounds of columns or rows.
- COPT\_DBLINFO\_RELAXUB or "RelaxUB"  
Double information.  
Feasibility relaxation values for upper bounds of columns or rows.

## 15.4 Parameters

### 15.4.1 Limits and tolerances

- COPT\_DBLPARAM\_TIMELIMIT or "TimeLimit"  
Double parameter.  
Time limit of the optimization.  
**Default:** 1e20  
**Minimal:** 0  
**Maximal:** 1e20
- COPT\_INTPARAM\_NODELIMIT or "NodeLimit"  
Integer parameter.  
Node limit of the optimization.  
**Default:** -1  
**Minimal:** -1  
**Maximal:** INT\_MAX
- COPT\_INTPARAM\_BARITERLIMIT or "BarIterLimit"  
Integer parameter.  
Iteration limit of barrier method.  
**Default:** 500  
**Minimal:** 0  
**Maximal:** INT\_MAX
- COPT\_DBLPARAM\_MATRIXTOL or "MatrixTol"  
Double parameter.  
Input matrix coefficient tolerance.  
**Default:** 1e-10  
**Minimal:** 0  
**Maximal:** 1e-7
- COPT\_DBLPARAM\_FEASTOL or "FeasTol"

Double parameter.

The feasibility tolerance.

**Default:** 1e-6

**Minimal:** 1e-9.

**Maximal:** 1e-4

- COPT\_DBLPARAM\_DUALTOL or "DualTol"

Double parameter.

The tolerance for dual solutions and reduced cost.

**Default:** 1e-6

**Minimal:** 1e-9

**Maximal:** 1e-4

- COPT\_DBLPARAM\_INTTOL or "IntTol"

Double parameter.

The integrality tolerance for variables.

**Default:** 1e-6

**Minimal:** 1e-9

**Maximal:** 1e-1

- COPT\_DBLPARAM\_RELGAP or "RelGap"

Double parameter.

The relative gap of optimization.

**Default:** 1e-4

**Minimal:** 0

**Maximal:** DBL\_MAX

- COPT\_DBLPARAM\_ABSGAP or "AbsGap"

Double parameter.

The absolute gap of optimization.

**Default:** 1e-6

**Minimal:** 0

**Maximal:** DBL\_MAX

## 15.4.2 Presolving and scaling

- COPT\_INTPARAM\_PRESOLVE or "Presolve"

Integer parameter.

Level of presolving before solving a model.

**Default:** -1

**Possible values:**

-1: Automatic

0: Off

1: Fast

2: Normal

3: Aggressive

- COPT\_INTPARAM\_SCALING or "Scaling"

Integer parameter.

Whether to perform scaling before solving a problem.

**Default:** -1

**Possible values:**

-1: Choose automatically.

0: No scaling.

1: Apply scaling.

- COPT\_INTPARAM\_DUALIZE or "Dualize"

Integer parameter.

Whether to dualize a problem before solving it.

**Default:** -1

**Possible values:**

-1: Choose automatically.

0: No dualizing.

1: Dualizing the problem.

### 15.4.3 Linear programming related

- COPT\_INTPARAM\_LPMETHOD or "LpMethod"

Integer parameter.

Method to solve the LP problem.

**Default:** -1

**Possible values:**

1: Dual simplex.

2: Barrier.

3: Crossover.

4: Concurrent (Use simplex and barrier simultaneously).

5: Choose between simplex and barrier automatically (Based on features such as sparsity and/or coefficients ranges).

- COPT\_INTPARAM\_DUALPRICE or "DualPrice"

Integer parameter.

Specifies the dual simplex pricing algorithm.

**Default:** -1

**Possible values:**

-1: Choose automatically.

0: Using Devex pricing algorithm.

1: Using dual steepest-edge pricing algorithm.

- COPT\_INTPARAM\_DUALPERTURB or "DualPerturb"

Integer parameter.

Whether to allow the objective function perturbation when using the dual simplex method.

**Default:** -1

**Possible values:**

-1: Choose automatically.

0: No perturbation.

1: Allow objective function perturbation.

- COPT\_INTPARAM\_BARHOMOGENEOUS or "BarHomogeneous"

Integer parameter.

Whether to use homogeneous self-dual form in barrier.

**Default:** -1

**Possible values:**

-1: Choose automatically.

0: No.

1: Yes.

- COPT\_INTPARAM\_BARORDER or "BarOrder"

Integer parameter.

Barrier ordering algorithm.

**Default:** -1

**Possible values:**

-1: Choose automatically.

0: Approximate Minimum Degree (AMD).

1: Nested Dissection (ND).

- COPT\_INTPARAM\_CROSSOVER or "Crossover"

Integer parameter.

Whether to use crossover.

**Default:** 1

**Possible values:**

-1: Choose automatically.

Only run crossover when the LP solution is not primal-dual feasible.

0: No.

1: Yes.

- COPT\_INTPARAM\_REQFARKASRAY or "ReqFarkasRay"

Integer parameter.

Advanced topic. Whether to compute the dual Farkas or primal ray when the LP is infeasible or unbounded.

**Default:** 0

**Possible values:**

0: No.

1: Yes.

#### 15.4.4 Semidefinite programming related

- COPT\_INTPARAM\_SDPMETHOD or "SDPMethod"

Integer parameter.

Method to solve the SDP problem.

**Default:** -1

**Possible values:**

-1: Choose automatically.

0: Primal-Dual method.

1: ADMM method.

2: Dual method.

#### 15.4.5 Integer programming related

- COPT\_INTPARAM\_CUTLEVEL or "CutLevel"

Integer parameter.

Level of cutting-planes generation.

**Default:** -1

**Possible values:**

-1: Choose automatically.

0: Off

1: Fast

2: Normal

3: Aggressive

- COPT\_INTPARAM\_ROOTCUTLEVEL or "RootCutLevel"

Integer parameter.

Level of cutting-planes generation of root node.

**Default:** -1

**Possible values:**

-1: Choose automatically.

0: Off

1: Fast

2: Normal

3: Aggressive

- COPT\_INTPARAM\_TREECUTLEVEL or "TreeCutLevel"

Integer parameter.

Level of cutting-planes generation of search tree.

**Default:** -1

**Possible values:**

-1: Choose automatically.

0: Off

1: Fast

2: Normal

3: Aggressive

- COPT\_INTPARAM\_ROOTCUTROUNDS or "RootCutRounds"

Integer parameter.

Rounds of cutting-planes generation of root node.

**Default:** -1 (Choose automatically)

**Minimal:** -1

**Maximal:** INT\_MAX

- COPT\_INTPARAM\_NODECUTROUNDS or "NodeCutRounds"

Integer parameter.

Rounds of cutting-planes generation of search tree node.

**Default:** -1 (Choose automatically)

**Minimal:** -1

**Maximal:** INT\_MAX

- COPT\_INTPARAM\_HEURLEVEL or "HeurLevel"

Integer parameter.

Level of heuristics.

**Default:** -1

**Possible values:**

-1: Choose automatically

0: Off

1: Fast

2: Normal

3: Aggressive

- COPT\_INTPARAM\_ROUNDINGHEURLEVEL or "RoundingHeurLevel"

Integer parameter.

Level of rounding heuristics.

**Default:** -1

**Possible values:**

-1: Choose automatically

0: Off

1: Fast

2: Normal

3: Aggressive

- COPT\_INTPARAM\_DIVINGHEURLEVEL or "DivingHeurLevel"

Integer parameter.

Level of diving heuristics.

**Default:** -1

**Possible values:**

-1: Choose automatically

0: Off

1: Fast

2: Normal

3: Aggressive

- COPT\_INTPARAM\_TREECUTLEVEL or "SubMipHeurLevel"

Integer parameter.

Level of Sub-MIP heuristics.

**Default:** -1

**Possible values:**

-1: Choose automatically

0: Off

1: Fast

2: Normal

3: Aggressive

- COPT\_INTPARAM\_STRONGBRANCHING or "StrongBranching"

Integer parameter.

Level of strong branching.

**Default:** -1

**Possible values:**

-1: Choose automatically

0: Off

1: Fast

2: Normal

3: Aggressive

- COPT\_INTPARAM\_CONFLICTANALYSIS or "ConflictAnalysis"

Integer parameter.

Whether to perform conflict analysis.

**Default:** -1

**Possible values:**

- 1: Choose automatically.
- 0: No
- 1: Yes

- COPT\_INTPARAM\_MIPSTARTMODE or "MipStartMode"

Integer parameter.

Mode of MIP starts.

**Default:** -1

**Possible values:**

- 1: Choose automatically.
- 0: Do not use any MIP starts.
- 1: Only load full and feasible MIP starts.
- 2: Only load feasible ones (complete partial solutions by solving subMIPs).

- COPT\_INTPARAM\_MIPSTARTNODELIMIT or "MipStartNodeLimit"

Integer parameter.

Limit of nodes for MIP start sub-MIPs.

**Default:** -1 (Choose automatically)

**Minimal:** -1 (Choose automatically)

**Maximal:** INT\_MAX

## 15.4.6 Parallel computing related

- COPT\_INTPARAM\_THREADS or "Threads"

Integer parameter.

Number of threads to use.

**Default:** -1 (Choose automatically)

**Minimal:** -1 (Choose automatically)

**Maximal:** 128

- COPT\_INTPARAM\_BARTHREADS or "BarThreads"

Integer parameter.

Number of threads used by barrier. If value is -1, the thread count is determined by parameter **Threads**.

**Default:** -1 (Choose automatically)

**Minimal:** -1 (Choose automatically)

**Maximal:** 128

- COPT\_INTPARAM\_SIMPLEXTHREADS or "SimplexThreads"

Integer parameter.

Number of threads used by dual simplex. If value is -1, the thread count is determined by parameter **Threads**.

**Default:** -1 (Choose automatically)



**Minimal:** -1 (Choose automatically)

**Maximal:** 128

- COPT\_INTPARAM\_CROSSOVERTHREADS or "CrossoverThreads"

Integer parameter.

Number of threads used by crossover. If value is -1, the thread count is determined by parameter **Threads**.

**Default:** -1 (Choose automatically)

**Minimal:** -1 (Choose automatically)

**Maximal:** 128

- COPT\_INTPARAM\_MIPTASKS or "MipTasks"

Integer parameter.

Number of MIP tasks in parallel.

**Default:** -1 (Choose automatically)

**Minimal:** -1 (Choose automatically)

**Maximal:** 256

#### 15.4.7 IIS computation related

- COPT\_INTPARAM\_IISMETHOD or "IISMethod"

Integer parameter.

Method for IIS computation.

**Default:** -1

**Possible values:**

-1: Choose automatically.

0: Find smaller IIS.

1: Find IIS quickly.

#### 15.4.8 Feasibility relaxation related

- COPT\_INTPARAM\_FEASRELAXMODE or "FeasRelaxMode"

Integer parameter.

Method for feasibility relaxation.

**Default:** 0

**Possible values:**

0: Minimize sum of violations.

1: Optimize original objective function under minimal sum of violations.

2: Minimize number of violations.

3: Optimize original objective function under minimal number of violations.

4: Minimize sum of squared violations.

5: Optimize original objective function under minimal sum of squared violations.

### 15.4.9 Tuner related

- COPT\_DBLPARAM\_TUNETIMELIMIT or "TuneTimeLimit"
 

Double parameter.

Time limit for parameter tuning. A value of 0 indicates that the solver is set automatically.

**Default value** 0

**Minimum** 0

**Maximum** 1e20
- COPT\_DBLPARAM\_TUNETARGETTIME or "TuneTargetTime"
 

Double parameter.

Time target for parameter tuning.

**default** 1e-2

**Minimum** 0

**Maximum** DBL\_MAX
- COPT\_DBLPARAM\_TUNETARGETRELGAP or "TuneTargetRelGap"
 

Double parameter.

Optimal relative tolerance target for parameter tuning.

**default** 1e-4

**Minimum** 0

**Maximum** DBL\_MAX
- COPT\_INTPARAM\_TUNEMETHOD or "TuneMethod"
 

Integer parameter.

Method for parameter tuning.

**default** -1

**optional value**

  - 1: Choose automatically.
  - 0: Greedy search strategy.
  - 1: Broader search strategy.
- COPT\_INTPARAM\_TUNEMODE or "TuneMode"
 

Integer parameter.

Mode for parameter tuning.

**default** -1

**optional value**

  - 1: Choose automatically.
  - 0: Solving time.
  - 1: Optimal relative tolerance.
  - 2: Objective function value.
  - 3: The lower bound of the objective function value.
- COPT\_INTPARAM\_TUNEMEASURE or "TuneMeasure"

Integer parameter.

Parameter tuning result calculation method.

**default** -1

**optional value**

-1: Choose automatically.

0: Calculate the average value.

1: Calculate the maximum value.

- COPT\_INTPARAM\_TUNEPERMUTES or "TunePermutates"

Integer parameter.

Permutations for each trial parameter set. A value of 0 indicates that the solver is automatically set.

**Default value** 0

**Minimum** 0

**Maximum** INT\_MAX

- COPT\_INTPARAM\_TUNEOUTPUTLEVEL or "TuneOutputLevel"

Integer parameter.

Parameter tuning log output intensity.

**Default value** 2

**optional value**

0: Not displayed.

1: Display only improved parameter results.

2: Displays a summary of the results for each set of parameters.

3: Display each group of parameter results in detail.

#### 15.4.10 Other parameters

- COPT\_INTPARAM\_LOGGING or "Logging"

Integer parameter.

Whether to print optimization logs.

**Default:** 1

**Possible values:**

0: No optimization logs.

1: Print optimization logs.

- COPT\_INTPARAM\_LOGTOCONSOLE or "LogToConsole"

Integer parameter.

Whether to print optimization logs to console.

**Default:** 1

**Possible values:**

0: No optimization logs to console.

1: Print optimization logs to console.

## 15.5 API Functions

The documentations for COPT API functions are grouped by their purposes.

All the return values of COPT API functions are integers, and possible return values are documented in the constants section.

### 15.5.1 Creating the environment and problem

#### 15.5.1.1 COPT\_CreateEnvConfig

##### Synopsis

```
int COPT_CreateEnvConfig(copt_env_config **p_config)
```

##### Description

Create a COPT client configuration.

##### Arguments

`p_config`

Output pointer to COPT client configuration.

#### 15.5.1.2 COPT\_DeleteEnvConfig

##### Synopsis

```
int COPT_DeleteEnvConfig(copt_env_config **p_config)
```

##### Description

Delete COPT client configuration.

##### Arguments

`p_config`

Input pointer to COPT client configuration.

#### 15.5.1.3 COPT\_SetEnvConfig

##### Synopsis

```
int COPT_SetEnvConfig(copt_env_config *config, const char *name,  
const char *value)
```

##### Description

Set COPT client configuration.

##### Arguments

`config`

COPT client configuration.

`name`

Name of configuration parameter.

`value`

Value of configuration parameter.

#### 15.5.1.4 COPT\_CreateEnv

##### Synopsis

```
int COPT_CreateEnv(copt_env **p_env)
```

##### Description

Creates a COPT environment.

Calling this function is the first step when using the COPT library. It validates the license, and when the license is okay, the resulting environment variable will allow for creating COPT problems. When the license validation fails, more information can be obtained using `COPT_GetLicenseMsg` to help identify the issue.

##### Arguments

`p_env`

The output pointer to a variable holding COPT environment.

#### 15.5.1.5 COPT\_CreateEnvWithPath

##### Synopsis

```
int COPT_CreateEnvWithPath(const char *licDir, copt_env **p_env)
```

##### Description

Creates a COPT environment, directory of license files is specified by argument `licDir`.

Calling this function is the first step when using the COPT library. It validates the license, and when the license is okay, the resulting environment variable will allow for creating COPT problems. When the license validation fails, more information can be obtained using `COPT_GetLicenseMsg` to help identify the issue.

##### Arguments

`licDir`

Directory of license files.

`p_env`

Output pointer to a variable holding COPT environment.

#### 15.5.1.6 COPT\_CreateEnvWithConfig

##### Synopsis

```
int COPT_CreateEnvWithConfig(copt_env_config *config, copt_env  
**p_env)
```

##### Description

Creates a COPT environment, client configuration is specified by argument `config`.

Calling this function is the first step when using the COPT library. It validates the client configuration, and when the license is okay, the resulting environment variable will allow for creating COPT problems. When the license validation fails, more information can be obtained using `COPT_GetLicenseMsg` to help identify the issue.

##### Arguments

`config`

Client configuration.

`p_env`

Output pointer to a variable holding COPT environment.

#### 15.5.1.7 COPT\_DeleteEnv

##### Synopsis

```
int COPT_DeleteEnv(copt_env **p_env)
```

##### Description

Deletes the COPT environment created by COPT\_CreateEnv.

##### Arguments

`p_env`

Input pointer to a variable holding COPT environment.

#### 15.5.1.8 COPT\_GetLicenseMsg

##### Synopsis

```
int COPT_GetLicenseMsg(copt_env *env, char *buff, int buffSize)
```

##### Description

Returns a C-style string regarding the license validation information. Please refer to this function when COPT\_CreateEnv fails.

##### Arguments

`env`

The COPT environment.

`buff`

A buffer for holding the resulting string.

`buffSize`

The size of the above buffer.

#### 15.5.1.9 COPT\_CreateProb

##### Synopsis

```
int COPT_CreateProb(copt_env *env, copt_prob **p_prob)
```

##### Description

Creates an empty COPT problem.

##### Arguments

`env`

The COPT environment.

`p_prob`

Output pointer to a variable holding the COPT problem.

#### 15.5.1.10 COPT\_CreateCopy

##### Synopsis

```
int COPT_CreateCopy(copt_prob *src_prob, copt_prob **p_dst_prob)
```

##### Description

Create a deep-copy of an COPT problem.

**Note:** The parameter settings will be copied too. To solve the copied problem with different parameters, users should reset its parameters to default by calling COPT\_ResetParam first, and then set parameters as needed.

##### Arguments

src\_prob

The pointer to a variable holding the COPT problem to be copied.

p\_dst\_prob

Output pointer to a variable holding the copied COPT problem.

#### 15.5.1.11 COPT\_DeleteProb

##### Synopsis

```
int COPT_DeleteProb(copt_prob **p_prob)
```

##### Description

Deletes the COPT problem created using COPT\_CreateProb

##### Arguments

p\_prob

Input pointer to a variable holding the COPT problem.

### 15.5.2 Building and modifying a problem

#### 15.5.2.1 COPT\_LoadProb

##### Synopsis

```
int COPT_LoadProb(copt_prob *prob, int nCol, int nRow, int  
iObjSense, double dObjConst, const double *obj, const int  
*colMatBeg, const int *colMatCnt, const int *colMatIdx, const double  
*colMatElem, const char *colType, const double *colLower, const  
double *colUpper, const char *rowSense, const double *rowBound,  
const double *rowUpper, char const *const *colNames, char const  
*const *rowNames)
```

##### Description

Loads a problem defined by arrays.

##### Arguments

prob

The COPT problem.

nCol

Number of variables (coefficient matrix columns).

**nRow**

Number of constraints (coefficient matrix rows).

**iObjSense**

The optimization sense, either COPT\_MAXIMIZE or COPT\_MINIMIZE.

**dObjConst**

The constant part of the objective function.

**obj**

Objective coefficients of variables.

**colMatBeg, colMatCnt, colMatIdx and colMatElem**

Defines the coefficient matrix in compressed column storage (CCS) format. Please see **other information** for an example of the CCS format.

If **colMatCnt** is NULL, **colMatBeg** will need to have length of **nCol+1**, and the begin and end pointers to the i-th matrix column coefficients are defined using **colMatBeg[i]** and **colMatBeg[i+1]**.

If **colMatCnt** is provided, the begin and end pointers to the i-th column coefficients are defined using **colMatBeg[i]** and **colMatBeg[i] + colMatCnt[i]**.

**colType**

Types of variables.

If **colType** is NULL, all variables will be continuous.

**colLower and colUpper**

Lower and upper bounds of variables.

If **colLower** is NULL, lower bounds will be 0.

If **colUpper** is NULL, upper bounds will be infinity.

**rowSense**

Senses of constraint.

Please refer to the list of all senses constants for all the supported types.

If **rowSense** is NULL, then **rowBound** and **rowUpper** will be treated as lower and upper bounds for constraints. This is the recommended method for defining constraints.

If **rowSense** is provided, then **rowBound** and **rowUpper** will be treated as RHS and **range** for constraints. In this case, **rowUpper** is only required when there are COPT\_RANGE constraints, where the

lower bound is **rowBound[i] - fabs(rowUpper[i])**

upper bound is **rowBound[i]**

**rowBound**

Lower bounds or RHS of constraints.

**rowUpper**

Upper bounds or **range** of constraints.

**colNames and rowNames**

Names of variables and constraints. Can be NULL.

## Other information



The compressed column storage (CCS) is a common format for storing sparse matrix. We demonstrate how to store the example matrix with 4 columns and 3 rows in the CCS format.

$$A = \begin{bmatrix} 1.1 & 1.2 & & \\ & 2.2 & 2.3 & \\ & & 3.3 & 3.4 \end{bmatrix} \quad (15.6)$$

```
// Compressed column storage using colMatBeg
colMatBeg[5] = { 0, 1, 3, 5, 6};
colMatIdx[6] = { 0, 0, 1, 1, 2, 2};
colMatElem[6] = {1.1, 1.2, 2.2, 2.3, 3.3, 3.4};

// Compressed column storage using both colMatBeg and colMatCnt.
// The * in the example represents unused spaces.
colMatBeg[4] = { 0, 1, 5, 7};
colMatCnt[4] = { 1, 2, 2, 1};
colMatIdx[6] = { 0, 0, 1, 1, 2, *, *, 2};
colMatElem[6] = {1.1, 1.2, 2.2, 2.3, 3.3, *, *, 3.4};
```

### 15.5.2.2 COPT\_AddCol

#### Synopsis

```
int COPT_AddCol(copt_prob *prob, double dColObj, int nColMatCnt,
const int *colMatIdx, const double *colMatElem, char cColType,
double dColLower, double dColUpper, const char *colName)
```

#### Description

Adds one variable (column) to the problem.

#### Arguments

**prob**

The COPT problem.

**dColObj**

The objective coefficient of the variable.

**nColMatCnt**

Number of non-zero elements in the column.

**colMatIdx**

Row index of non-zero elements in the column.

**colMatElem**

Values of non-zero elements in the column.

**cColType**

The type of the variable.

**dColLower** and **dColUpper**

The lower and upper bounds of the variable.

**colName**

The name of the variable. Can be NULL.

### 15.5.2.3 COPT\_AddPSDCol

#### Synopsis

```
int COPT_AddPSDCol(copt_prob *prob, int colDim, const char *name)
```

#### Description

Add a PSD variable to the problem.

#### Arguments

`prob`

The COPT problem.

`colDim`

Dimension of new PSD variable.

`name`

Name of new PSD variable. Can be NULL.

### 15.5.2.4 COPT\_AddRow

#### Synopsis

```
int COPT_AddRow(copt_prob *prob, int nRowMatCnt, const int
*rowMatIdx, const double *rowMatElem, char cRowSense, double
dRowBound, double dRowUpper, const char *rowName)
```

#### Description

Adds one constraint (row) to the problem.

#### Arguments

`prob`

The COPT problem.

`nRowMatCnt`

Number of non-zero elements in the row.

`rowMatIdx`

Column index of non-zero elements in the row.

`rowMatElem`

Values of non-zero elements in the row.

`cRowSense`

The sense of the row.

Please refer to the list of all senses constants for all the supported types.

If `cRowSense` is 0, then `dRowBound` and `dRowUpper` will be treated as lower and upper bounds for the constraint. This is the recommended method for defining constraints.

If `cRowSense` is provided, then `dRowBound` and `dRowUpper` will be treated as RHS and **range** for the constraint. In this case, `dRowUpper` is only required when `cRowSense = COPT_RANGE`, where

lower bound is `dRowBound - dRowUpper`

upper bound is `dRowBound`

dRowBound

Lower bound or RHS of the constraint.

dRowUpper

Upper bound or **range** of the constraint.

rowName

The name of the constraint. Can be NULL.

#### 15.5.2.5 COPT\_AddCols

##### Synopsis

```
int COPT_AddCols(copt_prob *prob, int nAddCol, const double *colObj,  
const int *colMatBeg, const int *colMatCnt, const int *colMatIdx,  
const double *colMatElem, const char *colType, const double  
*colLower, const double *colUpper, char const *const *colNames)
```

##### Description

Adds nAddCol variables (columns) to the problem.

##### Arguments

prob

The COPT problem.

nAddCol

Number of new variables.

colObj

Objective coefficients of new variables.

colMatBeg, colMatCnt, colMatIdx and colMatElem

Defines the coefficient matrix in compressed column storage (CCS) format.  
Please see **other information** of COPT\_LoadProb for an example of the  
CCS format.

colType

Types of new variables.

colLower and colUpper

Lower and upper bounds of new variables.

If colLower is NULL, lower bounds will be 0.

If colUpper is NULL, upper bounds will be COPT\_INFINITY.

colNames

Names of new variables. Can be NULL.

### 15.5.2.6 COPT\_AddPSDCols

#### Synopsis

```
int COPT_AddPSDCols(copt_prob *prob, int nAddCol, const int*
colDims, char const *const *names)
```

#### Description

Add `nAddCol` PSD variables to the problem.

#### Arguments

`prob`

The COPT problem.

`nAddCol`

Number of new PSD variables.

`colDims`

Dimensions of new PSD variables.

`names`

Names of new PSD variables. Can be NULL.

### 15.5.2.7 COPT\_AddRows

#### Synopsis

```
int COPT_AddRows(copt_prob *prob, int nAddRow, const int *rowMatBeg,
const int *rowMatCnt, const int *rowMatIdx, const double
*rowMatElem, const char *rowSense, const double *rowBound, const
double *rowUpper, char const *const *rowNames)
```

#### Description

Adds `nAddRow` constraints (rows) to the problem.

#### Arguments

`prob`

The COPT problem.

`nAddRow`

Number of new constraints.

`rowMatBeg`, `rowMatCnt`, `rowMatIdx` and `rowMatElem`

Defines the coefficient matrix in compressed row storage (CRS) format. The CRS format is similar to the CCS format described in the **other information** of `COPT_LoadProb`.

`rowSense`

Senses of new constraints.

Please refer to the list of all senses constants for all the supported types.

If `rowSense` is NULL, then `rowBound` and `rowUpper` will be treated as lower and upper bounds for constraints. This is the recommended method for defining constraints.

If `rowSense` is provided, then `rowBound` and `rowUpper` will be treated as RHS and **range** for constraints. In this case, `rowUpper` is only required when there are `COPT_RANGE` constraints, where the

lower bound is `rowBound[i] - fabs(rowUpper[i])`

upper bound is `rowBound[i]`

`rowBound`

Lower bounds or RHS of new constraints.

`rowUpper`

Upper bounds or **range** of new constraints.

`rowNames`

Names of new constraints. Can be NULL.

#### 15.5.2.8 COPT\_AddSOSs

##### Synopsis

```
int COPT_AddSOSs(copt_prob *prob, int nAddSOS, const int *sosType,
const int *sosMatBeg, const int *sosMatCnt, const int *sosMatIdx,
const double *sosMatWt)
```

##### Description

Add `nAddSOS` SOS constraints to the problem. If `sosMatWt` is NULL, then COPT will generate it internally.

**Note:** if a problem contains SOS constraints, the problem is a MIP.

##### Arguments

`prob`

The COPT problem.

`nAddSOS`

Number of new SOS constraints.

`sosType`

Types of SOS constraints.

`sosMatBeg`, `sosMatCnt`, `sosMatIdx` and `sosMatWt`

Defines the coefficient matrix in compressed row storage (CRS) format. The CRS format is similar to the CCS format described in the **other information** of `COPT_LoadProb`.

`sosMatWt`

Weights of variables in SOS constraints. Can be NULL.

#### 15.5.2.9 COPT\_AddCones

##### Synopsis

```
int COPT_AddCones(copt_prob *prob, int nAddCone, const int
*coneType, const int *coneBeg, const int *coneCnt, const int
*coneIdx)
```

##### Description

Add `nAddCone` Second-Order-Cone (SOC) constraints.

##### Arguments

`prob`

The COPT problem.

`nAddCone`

Number of new SOC constraints.

`coneType`

Types of SOC constraints.

`coneBeg, coneCnt, coneIdx`

Defines the coefficient matrix in compressed row storage (CRS) format.  
The CRS format is similar to the CCS format described in the **other information** of COPT\_LoadProb.

### 15.5.2.10 COPT\_AddQConstr

#### Synopsis

```
int COPT_AddQConstr(copt_prob *prob, int nRowMatCnt, const int
*rowMatIdx, const int *rowMatElem, int nQMatCnt, const int *qMatRow,
const int *qMatCol, const double *qMatElem, char cRowSense, double
dRowBound, const char *name)
```

#### Description

Add a general quadratic constraint.

**Note** Only convex quadratic constraint is currently supported.

#### Arguments

`prob`

The COPT problem.

`nRowMatCnt`

Number of non-zero linear terms of the quadratic constraint (row).

`rowMatIdx`

Column index of non-zero linear terms of the quadratic constraint (row).

`rowMatElem`

Values of non-zero linear terms of the quadratic constraint (row).

`nQMatCnt`

Number of non-zero quadratic terms of the quadratic constraint (row).

`qMatRow`

Row index of non-zero quadratic terms of the quadratic constraint (row).

`qMatCol`

Column index of non-zero quadratic terms of the quadratic constraint (row).

`qMatElem`

Values of non-zero quadratic terms of the quadratic constraint (row).

`cRowSense`

The sense of the quadratic constraint (row).

`dRowBound`

Right hand side of the quadratic constraint (row).

name

Name of the quadratic constraint (row).

#### 15.5.2.11 COPT\_AddPSDConstr

##### Synopsis

```
int COPT_AddPSDConstr(copt_prob *prob, int nRowMatCnt, const
int *rowMatIdx, const int *rowMatElem, int nColCnt, const int
*psdColIdx, const int *symMatIdx, char cRowSense, double dRowBound,
double dRowUpper, const char *name)
```

##### Description

Add a PSD constraint.

##### Arguments

prob

The COPT problem.

nRowMatCnt

Number of non-zero linear terms of the PSD constraint.

rowMatIdx

Column index of non-zero linear terms of the PSD constraint.

rowMatElem

Values of non-zero linear terms of the PSD constraint.

nColCnt

Number of PSD terms of the PSD constraint.

psdColIdx

PSD variable index of PSD terms of the PSD constraint.

symMatIdx

Symmetric matrix index of PSD terms of the PSD constraint.

cRowSense

Senses of new PSD constraint.

Please refer to the list of all senses constants for all the supported types.

If **cRowSense** is 0, then **dRowBound** and **dRowUpper** will be treated as lower and upper bounds for the constraint. This is the recommended method for defining constraints.

If **cRowSense** is provided, then **dRowBound** and **dRowUpper** will be treated as RHS and **range** for the constraint. In this case, **dRowUpper** is only required when **cRowSense** = **COPT\_RANGE**, where

lower bound is **dRowBound** - **dRowUpper**

upper bound is **dRowBound**

dRowBound

Lower bound or RHS of the PSD constraint.

dRowUpper

Upper bound or **range** of the PSD constraint.

name

Name of the PSD constraint. Can be NULL.

#### 15.5.2.12 COPT\_AddIndicator

##### Synopsis

```
int COPT_AddIndicator(copt_prob *prob, int binColIdx, int binColVal,
int nRowMatCnt, const int *rowMatIdx, const double *rowMatElem, char
cRowSense, double dRowBound)
```

##### Description

Add an indicator constraint to the problem.

##### Arguments

prob

The COPT problem.

binColIdx

Index of indicator variable (column).

binColVal

Value of indicator variable (column).

nRowMatCnt

Number of non-zero elements in the linear constraint (row).

rowMatIdx

Column index of non-zero elements in the linear constraint (row).

rowMatElem

Values of non-zero elements in the linear constraint (row).

cRowSense

The sense of the linear constraint (row). Options are: COPT\_EQUAL , COPT\_LESS\_EQUAL and COPT\_GREATER\_EQUAL .

dRowBound

Right hand side of the linear constraint (row).

#### 15.5.2.13 COPT\_AddSymMat

##### Synopsis

```
int COPT_AddSymMat(copt_prob *prob, int ndim, int nelem, int *rows,
int *cols, double *elems)
```

##### Description

Add a symmetric matrix to the problem. (Expect lower triangle part)

##### Arguments

prob

The COPT problem.

ndim

Dimension of symmetric matrix.



`nelem`

Number of non-zeros of symmetric matrix.

`rows`

Row index of symmetric matrix.

`cols`

Column index of symmetric matrix.

`elems`

Nonzero elements of symmetric matrix.

#### **15.5.2.14 COPT\_DelCols**

##### **Synopsis**

```
int COPT_DelCols(copt_prob *prob, int num, const int *list)
```

##### **Description**

Deletes `num` variables (columns) from the problem.

##### **Arguments**

`prob`

The COPT problem.

`num`

Number of variables to be deleted.

`list`

A list of index of variables to be deleted.

#### **15.5.2.15 COPT\_DelPSDCols**

##### **Synopsis**

```
int COPT_DelPSDCols(copt_prob *prob, int num, const int *list)
```

##### **Description**

Deletes `num` PSD variables from the problem.

##### **Arguments**

`prob`

The COPT problem.

`num`

Number of PSD variables to be deleted.

`list`

A list of index of PSD variables to be deleted.

#### 15.5.2.16 COPT\_DelRows

##### Synopsis

```
int COPT_DelRows(copt_prob *prob, int num, const int *list)
```

##### Description

Deletes `num` constraints (rows) from the problem.

##### Arguments

`prob`

The COPT problem.

`num`

The number of constraints to be deleted.

`list`

The list of index of constraints to be deleted.

#### 15.5.2.17 COPT\_DelSOSs

##### Synopsis

```
int COPT_DelSOSs(copt_prob *prob, int num, const int *list)
```

##### Description

Deletes `num` SOS constraints from the problem.

##### Arguments

`prob`

The COPT problem.

`num`

The number of SOS constraints to be deleted.

`list`

The list of index of SOS constraints to be deleted.

#### 15.5.2.18 COPT\_DelCones

##### Synopsis

```
int COPT_DelCones(copt_prob *prob, int num, const int *list)
```

##### Description

Deletes `num` Second-Order-Cone (SOC) constraints from the problem.

##### Arguments

`prob`

The COPT problem.

`num`

The number of SOC constraints to be deleted.

`list`

The list of index of SOC constraints to be deleted.

#### 15.5.2.19 COPT\_DelQConstrs

##### Synopsis

```
int COPT_DelQConstrs(copt_prob *prob, int num, const int *list)
```

##### Description

Deletes `num` quadratic constraints from the problem.

##### Arguments

`prob`

The COPT problem.

`num`

The number of quadratic constraints to be deleted.

`list`

The list of index of quadratic constraints to be deleted.

#### 15.5.2.20 COPT\_DelPSDConstrs

##### Synopsis

```
int COPT_DelPSDConstrs(copt_prob *prob, int num, const int *list)
```

##### Description

Deletes `num` PSD constraints from the problem.

##### Arguments

`prob`

The COPT problem.

`num`

The number of PSD constraints to be deleted.

`list`

The list of index of PSD constraints to be deleted.

#### 15.5.2.21 COPT\_DelIndicators

##### Synopsis

```
int COPT_DelIndicators(copt_prob *prob, int num, const int *list)
```

##### Description

Deletes `num` indicator constraints from the problem.

##### Arguments

`prob`

The COPT problem.

`num`

The number of indicator constraints to be deleted.

`list`

The list of index of indicator constraints to be deleted.

#### 15.5.2.22 COPT\_DelQuadObj

##### Synopsis

```
int COPT_DelQuadObj(copt_prob *prob)
```

##### Description

Deletes the quadratic terms from the quadratic objective function.

##### Arguments

`prob`

The COPT problem.

#### 15.5.2.23 COPT\_DelPSDObj

##### Synopsis

```
int COPT_DelPSDObj(copt_prob *prob)
```

##### Description

Deletes the PSD terms from objective function.

##### Arguments

`prob`

The COPT problem.

#### 15.5.2.24 COPT\_SetElem

##### Synopsis

```
int COPT_SetElem(copt_prob *prob, int iCol, int iRow, double  
newElem)
```

##### Description

Set coefficient of specified row and column.

**Note:** If `newElem` is smaller than or equal to parameter `MatrixTol`, the coefficient will be set as zero.

##### Arguments

`prob`

The COPT problem.

`iCol`

Column index.

`iRow`

Row index.

`newElem`

New coefficient.

**15.5.2.25 COPT\_SetPSDElem****Synopsis**

```
int COPT_SetPSDElem(copt_prob *prob, int iCol, int iRow, int newIdx)
```

**Description**

Set symmetric matrix index for given PSD term of PSD constraint.

**Arguments**

**prob**

The COPT problem.

**iCol**

PSD variable index.

**iRow**

PSD constraint index.

**newIdx**

New symmetric matrix index.

**15.5.2.26 COPT\_SetObjSense****Synopsis**

```
int COPT_SetObjSense(copt_prob *prob, int iObjSense)
```

**Description**

Change the objective function sense.

**Arguments**

**prob**

The COPT problem.

**iObjSense**

The optimization sense, either COPT\_MAXIMIZE or COPT\_MINIMIZE.

**15.5.2.27 COPT\_SetObjConst****Synopsis**

```
int COPT_SetObjConst(copt_prob *prob, double dObjConst)
```

**Description**

Set the constant term of objective function.

**Arguments**

**prob**

The COPT problem.

**dObjConst**

The constant term of objective function.

### 15.5.2.28 COPT\_SetColObj/Type/Lower/Upper/Names

#### Synopsis

```
int COPT_SetColObj(copt_prob *prob, int num, const int *list, const
double *obj)

int COPT_SetColType(copt_prob *prob, int num, const int *list, const
char *type)

int COPT_SetColLower(copt_prob *prob, int num, const int *list,
const double *lower)

int COPT_SetColUpper(copt_prob *prob, int num, const int *list,
const double *upper)

int COPT_SetColNames(copt_prob *prob, int num, const int *list, char
const *const *names)
```

#### Description

These five API functions each modifies

- objective coefficients
- variable types
- lower bounds
- upper bounds
- names

of `num` variables (columns) in the problem.

#### Arguments

`prob`

The COPT problem.

`num`

Number of variables to modify.

`list`

A list of index of variables to modify.

`obj`

New objective coefficients for each variable in the `list`.

`types`

New types for each variable in the `list`.

`lower`

New lower bounds for each variable in the `list`.

`upper`

New upper bounds for each variable in the `list`.

`names`

New names for each variable in the `list`.

#### 15.5.2.29 COPT\_SetPSDColNames

##### Synopsis

```
int COPT_SetPSDColNames(copt_prob *prob, int num, const int *list,
char const *const *names)
```

##### Description

Modify names of `num` PSD variables.

##### Arguments

`prob`

The COPT problem.

`num`

Number of PSD variables to modify.

`list`

A list of index of PSD variables to modify.

`names`

New names for each PSD variable in the `list`.

#### 15.5.2.30 COPT\_SetRowLower/Upper/Names

##### Synopsis

```
int COPT_SetRowLower(copt_prob *prob, int num, const int *list,
const double *lower)
```

```
int COPT_SetRowUpper(copt_prob *prob, int num, const int *list,
const double *upper)
```

```
int COPT_SetRowNames(copt_prob *prob, int num, const int *list, char
const *const *names)
```

##### Description

These three API functions each modifies

lower bounds

upper bounds

names

of `num` constraints (rows) in the problem.

##### Arguments

`prob`

The COPT problem.

`num`

Number of constraints to modify.

`list`

A list of index of constraints to modify.

`lower`

New lower bounds for each constraint in the `list`.

`upper`

New upper bounds for each constraint in the `list`.

`names`

New names for each constraint in the `list`.

#### 15.5.2.31 COPT\_SetQConstrSense/Rhs/Names

##### Synopsis

```
int COPT_SetQConstrSense(copt_prob *prob, int num, const int *list,
const char *sense)

int COPT_SetQConstrRhs(copt_prob *prob, int num, const int *list,
const double *rhs)

int COPT_SetQConstrNames(copt_prob *prob, int num, const int *list,
char const *const *names)
```

##### Description

These three API functions each modifies

`senses`

`RHS`

`names`

of `num` quadratic constraints (rows) in the problem.

##### Arguments

`prob`

The COPT problem.

`num`

Number of quadratic constraints to modify.

`list`

A list of index of quadratic constraints to modify.

`sense`

New senses for each quadratic constraint in the `list`.

`rhs`

New RHS for each quadratic constraint in the `list`.

`names`

New names for each quadratic constraint in the `list`.

#### 15.5.2.32 COPT\_SetPSDConstrLower/Upper/Names

##### Synopsis

```
int COPT_SetPSDConstrLower(copt_prob *prob, int num, const int
*list, const double *lower)

int COPT_SetPSDConstrUpper(copt_prob *prob, int num, const int
*list, const double *upper)

int COPT_SetPSDConstrNames(copt_prob *prob, int num, const int
*list, char const *const *names)
```

##### Description



These three API functions each modifies

- lower bounds
- upper bounds
- names

of `num` PSD constraints in the problem.

**Arguments**

`prob`

The COPT problem.

`num`

Number of PSD constraints to modify.

`list`

A list of index of PSD constraints to modify.

`lower`

New lower bounds for each PSD constraint in the `list`.

`upper`

New upper bounds for each PSD constraint in the `list`.

`names`

New names for each PSD constraint in the `list`.

**15.5.2.33 COPT\_ReplaceColObj****Synopsis**

```
int COPT_ReplaceColObj(copt_prob *prob, int num, const int *list,  
const double *obj)
```

**Description**

Replace objective function with new objective function represented by specified objective costs.

**Arguments**

`prob`

The COPT problem.

`num`

Number of variables to be modified.

`list`

Index of variables to be modified.

`obj`

Objective costs of modified variables.

#### 15.5.2.34 COPT\_ReplacePSDObj

##### Synopsis

```
int COPT_ReplacePSDObj(copt_prob *prob, int num, const int *list,
const int *idx)
```

##### Description

Replace PSD terms in objective function with specified PSD terms.

##### Arguments

prob

The COPT problem.

num

Number of PSD variables to be modified.

list

Index of PSD variables to be modified.

idx

Symmetric matrix index of modified PSD variables.

#### 15.5.2.35 COPT\_SetQuadObj

##### Synopsis

```
int COPT_SetQuadObj(copt_prob *prob, int num, int *qRow, int *qCol,
double *qElem)
```

##### Description

Set the quadratic terms of the quadratic objective function.

##### Arguments

prob

The COPT problem.

num

Number of non-zero quadratic terms of the quadratic objective function.

qRow

Row index of non-zero quadratic terms of the quadratic objective function.

qCol

Column index of non-zero quadratic terms of the quadratic objective function.

qElem

Values of non-zero quadratic terms of the quadratic objective function.

### 15.5.2.36 COPT\_SetPSDObj

#### Synopsis

```
int COPT_SetPSDObj(copt_prob *prob, int iCol, int newIdx)
```

#### Description

Set PSD terms of objective function.

#### Arguments

`prob`

The COPT problem.

`iCol`

PSD variable index.

`newIdx`

Symmetric matrix index.

## 15.5.3 Reading and writing the problem

### 15.5.3.1 COPT\_ReadMps

#### Synopsis

```
int COPT_ReadMps(copt_prob *prob, const char *mpsfilename)
```

#### Description

Reads a problem from a MPS file.

#### Arguments

`prob`

The COPT problem.

`mpsfilename`

The path to the MPS file.

### 15.5.3.2 COPT\_ReadLp

#### Synopsis

```
int COPT_ReadLp(copt_prob *prob, const char *lpfilename)
```

#### Description

Read a problem from a LP file.

#### Arguments

`prob`

The COPT problem.

`lpfilename`

The path to the LP file.

### 15.5.3.3 COPT\_ReadSDPA

#### Synopsis

```
int COPT_ReadSDPA(copt_prob *prob, const char *sdpafilename)
```

#### Description

Reads a problem from SDPA format file.

#### Arguments

`prob`

The COPT problem.

`sdpafilename`

The path to the SDPA format file.

### 15.5.3.4 COPT\_ReadCbf

#### Synopsis

```
int COPT_ReadCbf(copt_prob *prob, const char *cbffilename)
```

#### Description

Reads a problem from CBF format file.

#### Arguments

`prob`

The COPT problem.

`cbffilename`

The path to the CBF format file.

### 15.5.3.5 COPT\_ReadBin

#### Synopsis

```
int COPT_ReadBin(copt_prob *prob, const char *binfilename)
```

#### Description

Reads a problem from a COPT binary format file.

#### Arguments

`prob`

The COPT problem.

`binfilename`

The path to the COPT binary format file.

### 15.5.3.6 COPT\_ReadBlob

#### Synopsis

```
int COPT_ReadBlob(copt_prob *prob, void *blob, COPT_INT64 len)
```

#### Description

Reads a problem from COPT serialized data.

#### Arguments

`prob`

The COPT problem.

`blob`

Serialized data.

`len`

Length of serialized data.

### 15.5.3.7 COPT\_WriteMps

#### Synopsis

```
int COPT_WriteMps(copt_prob *prob, const char *mpsfilename)
```

#### Description

Writes the problem to a MPS file.

#### Arguments

`prob`

The COPT problem.

`mpsfilename`

The path to the MPS file.

### 15.5.3.8 COPT\_WriteMpsStr

#### Synopsis

```
int COPT_WriteMpsStr(copt_prob *prob, char *str, int nStrSize, int *pReqSize)
```

#### Description

Writes the problem to a string buffer as MPS format.

#### Arguments

`prob`

The COPT problem.

`str`

String buffer of MPS-format problem.

`nStrSize`

The size of string buffer.

`pReqSize`

Minimum space requirement of string buffer for problem.

#### 15.5.3.9 COPT\_WriteLp

##### Synopsis

```
int COPT_WriteLp(copt_prob *prob, const char *lpfilename)
```

##### Description

Writes the problem to a LP file.

##### Arguments

`prob`

The COPT problem.

`lpfilename`

The path to the LP file.

#### 15.5.3.10 COPT\_WriteCbf

##### Synopsis

```
int COPT_WriteCbf(copt_prob *prob, const char *cbffilename)
```

##### Description

Writes the problem to a CBF format file.

##### Arguments

`prob`

The COPT problem.

`cbffilename`

The path to the CBF format file.

#### 15.5.3.11 COPT\_WriteBin

##### Synopsis

```
int COPT_WriteBin(copt_prob *prob, const char *binfilename)
```

##### Description

Writes the problem to a COPT binary format file.

##### Arguments

`prob`

The COPT problem.

`binfilename`

The path to the COPT binary format file.

#### **15.5.3.12 COPT\_WriteBlob**

##### **Synopsis**

```
int COPT_WriteBlob(copt_prob *prob, int tryCompress, void **p_blob,  
COPT_INT64 *pLen)
```

##### **Description**

Writes the problem to COPT serialized data.

##### **Arguments**

**prob**

The COPT problem.

**tryCompress**

Whether to compress data.

**p\_blob**

Output pointer of serialized data.

**pLen**

Pointer to length of serialized data.

### **15.5.4 Solving the problem and accessing solutions**

#### **15.5.4.1 COPT\_SolveLp**

##### **Synopsis**

```
int COPT_SolveLp(copt_prob *prob)
```

##### **Description**

Solves the LP, QP, QCP, SOCP and SDP problem.

If problem is a MIP, then integer restrictions on variables will be ignored, and SOS constraints, indicator constraints will be discarded, and the problem will be solved as a LP.

##### **Arguments**

**prob**

The COPT problem.

#### **15.5.4.2 COPT\_Solve**

##### **Synopsis**

```
int COPT_Solve(copt_prob *prob)
```

##### **Description**

Solves the problem.

##### **Arguments**

**prob**

The COPT problem.

#### 15.5.4.3 COPT\_GetSolution

##### Synopsis

```
int COPT_GetSolution(copt_prob *prob, double *colVal)
```

##### Description

Obtains MIP solution.

##### Arguments

prob

The COPT problem.

colVal

Solution values of variables.

#### 15.5.4.4 COPT\_GetPoolObjVal

##### Synopsis

```
int COPT_GetPoolObjVal(copt_prob *prob, int iSol, double *p_objVal)
```

##### Description

Obtains the iSol -th objective value in solution pool.

##### Arguments

prob

The COPT problem.

iSol

Index of solution.

p\_objVal

Pointer to objective value.

#### 15.5.4.5 COPT\_GetPoolSolution

##### Synopsis

```
int COPT_GetPoolSolution(copt_prob *prob, int iSol, int num, const  
int *list, double *colVal)
```

##### Description

Obtains the iSol -th solution.

##### Arguments

prob

The COPT problem.

iSol

Index of solution.

num

Number of columns.

list

Index of columns. Can be NULL.



colVal

Array of solution.

#### 15.5.4.6 COPT\_GetLpSolution

##### Synopsis

```
int COPT_GetLpSolution(copt_prob *prob, double *value, double
*slack, double *rowDual, double *redCost)
```

##### Description

Obtains LP, QP, QCP, SOCP and SDP solutions.

**Note:** For SDP, please use `COPT_GetPSDColInfo` to obtain primal/dual solution of PSD variable.

##### Arguments

prob

The COPT problem.

value

Solution values of variables. Can be NULL.

slack

Solution values of slack variables. They are also known as activities of constraints. Can be NULL.

rowDual

Dual values of constraints. Can be NULL.

redCost

Reduced cost of variables. Can be NULL.

#### 15.5.4.7 COPT\_SetLpSolution

##### Synopsis

```
int COPT_SetLpSolution(copt_prob *prob, double *value, double
*slack, double *rowDual, double *redCost)
```

##### Description

Set LP solution.

##### Arguments

prob

The COPT problem.

value

Solution values of variables.

slack

Solution values of slack variables.

rowDual

Dual values of constraints.

redCost

Reduced cost of variables.

#### 15.5.4.8 COPT\_GetBasis

##### Synopsis

```
int COPT_GetBasis(copt_prob *prob, int *colBasis, int *rowBasis)
```

##### Description

Obtains LP basis.

##### Arguments

`prob`

The COPT problem.

`colBasis` and `rowBasis`

The basis status of variables and constraints. Please refer to basis constants for possible values and their meanings.

#### 15.5.4.9 COPT\_SetBasis

##### Synopsis

```
int COPT_SetBasis(copt_prob *prob, const int *colBasis, const int *rowBasis)
```

##### Description

Sets LP basis. It can be used to warm-start an LP optimization.

##### Arguments

`prob`

The COPT problem.

`colBasis` and `rowBasis`

The basis status of variables and constraints. Please refer to basis constants for possible values and their meanings.

#### 15.5.4.10 COPT\_SetSlackBasis

##### Synopsis

```
int COPT_SetSlackBasis(copt_prob *prob)
```

##### Description

Sets a slack basis for LP. The slack basis is the default starting basis for an LP problem. This API function can be used to restore an LP problem to its starting basis.

##### Arguments

`prob`

The COPT problem.

#### 15.5.4.11 COPT\_Reset

##### Synopsis

```
int COPT_Reset(copt_prob *prob, int iClearAll)
```

##### Description

Reset basis and LP/MIP solution in problem, which forces next solve start from scratch. If `iClearAll` is 1, then clear additional information such as MIP start as well.

##### Arguments

`prob`

The COPT problem.

`iClearAll`

Whether to clear additional information.

#### 15.5.4.12 COPT\_ReadSol

##### Synopsis

```
int COPT_ReadSol(copt_prob *prob, const char *solfilename)
```

##### Description

Reads a MIP solution from file as MIP start information.

**Note:** The default solution value is 0, i.e. a partial solution will be automatically filled in with zeros.

##### Arguments

`prob`

The COPT problem.

`solfilename`

The path to the solution file.

#### 15.5.4.13 COPT\_WriteSol

##### Synopsis

```
int COPT_WriteSol(copt_prob *prob, const char *solfilename)
```

##### Description

Writes a LP/MIP solution to a file.

##### Arguments

`prob`

The COPT problem.

`solfilename`

The path to the solution file.

#### 15.5.4.14 COPT\_WritePoolSol

##### Synopsis

```
int COPT_WritePoolSol(copt_prob *prob, int iSol, const char
*solfilename)
```

##### Description

Writes selected pool solution to a file.

##### Arguments

`prob`

The COPT problem.

`iSol`

Index of pool solution.

`solfilename`

The path to the solution file.

#### 15.5.4.15 COPT\_WriteBasis

##### Synopsis

```
int COPT_WriteBasis(copt_prob *prob, const char *basfilename)
```

##### Description

Writes the internal LP basis to a file.

##### Arguments

`prob`

The COPT problem.

`basfilename`

The path to the basis file.

#### 15.5.4.16 COPT\_ReadBasis

##### Synopsis

```
int COPT_ReadBasis(copt_prob *prob, const char *basfilename)
```

##### Description

Reads the LP basis from a file. It can be used to warm-start an LP optimization.

##### Arguments

`prob`

The COPT problem.

`basfilename`

The path to the basis file.

## 15.5.5 Accessing information of problem

### 15.5.5.1 COPT\_GetCols

#### Synopsis

```
int COPT_GetCols(copt_prob *prob, int nCol, const int *list, int
*colMatBeg, int *colMatCnt, int *colMatIdx, double *colMatElem, int
nElemSize, int *pReqSize)
```

#### Description

Extract coefficient matrix by columns.

In general, users need to call this function twice to accomplish the task. Firstly, by passing NULL to arguments `colMatBeg`, `colMatCnt`, `colMatIdx` and `colMatElem`, we get number of non-zeros elements by `pReqSize` specified by `nCol` and `list`. Secondly, allocate sufficient memory for CCS-format matrix and call this function again to extract coefficient matrix. If the memory of coefficient matrix passed to function is not sufficient, then return the first `nElemSize` non-zero elements, and the minimal required length of non-zero elements by `pReqSize`. If `list` is NULL, then the first `nCol` columns will be returned.

#### Arguments

`prob`

The COPT problem.

`nCol`

Number of columns.

`list`

Index of columns. Can be NULL.

`colMatBeg`, `colMatCnt`, `colMatIdx` and `colMatElem`

Defines the coefficient matrix in compressed column storage (CCS) format. Please see **other information** of `COPT_LoadProb` for an example of the CCS format.

`nElemSize`

Length of array for non-zero coefficients.

`pReqSize`

Pointer to minimal length of array for non-zero coefficients. Can be NULL.

### 15.5.5.2 COPT\_GetPSDCols

#### Synopsis

```
int COPT_GetPSDCols(copt_prob *prob, int nCol, int *list, int*
colDims, int *colLens)
```

#### Description

Get dimension and flattened length of `nCol` PSD variables.

#### Arguments

`prob`

The COPT problem.

`nCol`

Number of PSD variables.

`list`

Index of PSD variables. Can be NULL.

`colDims`

Dimension of PSD variables.

`colLens`

Flattened length of PSD variables.

### 15.5.5.3 COPT\_GetRows

#### Synopsis

```
int COPT_GetRows(copt_prob *prob, int nRow, const int *list, int
*rowMatBeg, int *rowMatCnt, int *rowMatIdx, double *rowMatElem, int
nElemSize, int *pReqSize)
```

#### Description

Extract coefficient matrix by rows.

In general, users need to call this function twice to accomplish the task. Firstly, by passing NULL to arguments `rowMatBeg`, `rowMatCnt`, `rowMatIdx` and `rowMatElem`, we get number of non-zeros elements by `pReqSize` specified by `nRow` and `list`. Secondly, allocate sufficient memory for CRS-format matrix and call this function again to extract coefficient matrix. If the memory of coefficient matrix passed to function is not sufficient, then return the first `nElemSize` non-zero elements, and the minimal required length of non-zero elements by `pReqSize`. If `list` is NULL, then the first `nCol` columns will be returned.

#### Arguments

`prob`

The COPT problem.

`nRow`

Number of rows.

`list`

Index of rows. Can be NULL.

`rowMatBeg`, `rowMatCnt`, `rowMatIdx` and `rowMatElem`

Defines the coefficient matrix in compressed row storage (CRS) format. Please see **other information** of `COPT_LoadProb` for an example of the CRS format.

`nElemSize`

Length of array for non-zero coefficients.

`pReqSize`

Pointer to minimal length of array for non-zero coefficients. Can be NULL.

#### 15.5.5.4 COPT\_GetElem

##### Synopsis

```
int COPT_GetElem(copt_prob *prob, int iCol, int iRow, double
*p_elem)
```

##### Description

Get coefficient of specified row and column.

##### Arguments

prob

The COPT problem.

iCol

Column index.

iRow

Row index.

p\_elem

Pointer to requested coefficient.

#### 15.5.5.5 COPT\_GetPSDElem

##### Synopsis

```
int COPT_GetPSDElem(copt_prob *prob, int iCol, int iRow, int *p_idx)
```

##### Description

Get symmetric matrix index of specified PSD constraint and PSD variable.

##### Arguments

prob

The COPT problem.

iCol

PSD variable index.

iRow

PSD constraint index.

p\_idx

Pointer to requested symmetric matrix index.

#### 15.5.5.6 COPT\_GetSymMat

##### Synopsis

```
int COPT_GetSymMat(copt_prob *prob, int iMat, int *p_nDim, int
*p_nElem, int *rows, int *cols, double *elems)
```

##### Description

Get specified symmetric matrix.

In general, users need to call this function twice to accomplish the task. Firstly, by passing NULL to arguments `rows`, `cols` and `elems`, we get dimension and number of

non-zeros of symmetric matrix by `p_nDim` and `p_nElem`, then allocate enough memory for `rows`, `cols` and `elems` and call this function to get the data of symmetric matrix.

#### Arguments

`prob`

The COPT problem.

`iMat`

Symmetric matrix index.

`p_nDim`

Pointer to dimension of symmetric matrix.

`p_nElem`

Pointer to number of nonzeros of symmetric matrix.

`rows`

Row index of symmetric matrix.

`cols`

Column index of symmetric matrix.

`elems`

Nonzero elements of symmetric matrix.

#### 15.5.5.7 COPT\_GetQuadObj

##### Synopsis

```
int COPT_GetQuadObj(copt_prob* prob, int* p_nQElem, int* qRow, int* qCol, double* qElem)
```

##### Description

Get the quadratic terms of the quadratic objective function.

##### Arguments

`prob`

The COPT problem.

`p_nQElem`

Pointer to number of non-zero quadratic terms . Can be NULL.

`qRow`

Row index of non-zero quadratic terms of the quadratic objective function.

`qCol`

Column index of non-zero quadratic terms of the quadratic objective function.

`qElem`

Values of non-zero quadratic terms of the quadratic objective function.



#### 15.5.5.8 COPT\_GetPSDObj

##### Synopsis

```
int COPT_GetPSDObj(copt_prob *prob, int iCol, int *p_idx)
```

##### Description

Get the specified PSD term of objective function.

##### Arguments

`prob`

The COPT problem.

`iCol`

PSD variable index.

`p_idx`

Pointer to symmetric matrix index.

#### 15.5.5.9 COPT\_GetSOSs

##### Synopsis

```
int COPT_GetSOSs(copt_prob *prob, int nSos, const int *list, int
*sosMatBeg, int *sosMatCnt, int *sosMatIdx, double *sosMatWt, int
nElemSize, int *pReqSize)
```

##### Description

Get the weight matrix of SOS constraints.

In general, users need to call this function twice to accomplish the task. Firstly, by passing NULL to arguments `sosMatBeg`, `sosMatCnt`, `sosMatIdx` and `sosMatWt`, we get number of non-zeros elements by `pReqSize` specified by `nSos` and `list`. Secondly, allocate sufficient memory for CRS-format matrix and call this function again to extract weight matrix. If the memory of weight matrix passed to function is not sufficient, then return the first `nElemSize` non-zero elements, and the minimal required length of non-zero elements by `pReqSize`. If `list` is NULL, then the first `nSos` columns will be returned.

##### Arguments

`prob`

The COPT problem.

`nSos`

Number of SOS constraints.

`list`

Index of SOS constraints. Can be NULL.

`sosMatBeg`, `sosMatCnt`, `sosMatIdx` and `sosMatWt`

Defines the weight matrix of SOS constraints in compressed row storage (CRS) format. Please see **other information** of `COPT_LoadProb` for an example of the CRS format.

`nElemSize`

Length of array for non-zero weights.

`pReqSize`

Pointer to minimal length of array for non-zero weights. Can be NULL.

#### 15.5.5.10 COPT\_GetCones

##### Synopsis

```
int COPT_GetCones(copt_prob *prob, int nCone, const int *list, int
*coneBeg, int *coneCnt, int *coneIdx, int nElemSize, int *pReqSize)
```

##### Description

Get the matrix of Second-Order-Cone (SOC) constraints.

In general, users need to call this function twice to accomplish the task. Firstly, by passing NULL to arguments `coneBeg`, `coneCnt` and `coneIdx`, we get number of non-zeros elements by `pReqSize` specified by `nCone` and `list`. Secondly, allocate sufficient memory for CRS-format matrix and call this function again to extract weight matrix. If the memory of weight matrix passed to function is not sufficient, then return the first `nElemSize` non-zero elements, and the minimal required length of non-zero elements by `pReqSize`. If `list` is NULL, then the first `nCone` columns will be returned.

##### Arguments

`prob`

The COPT problem.

`nCone`

Number of SOC constraints.

`list`

Index of SOC constraints. Can be NULL.

`coneBeg`, `coneCnt`, `coneIdx`

Defines the matrix of SOC constraints in compressed row storage (CRS) format. Please see **other information** of `COPT_LoadProb` for an example of the CRS format.

`nElemSize`

Length of array for non-zero weights.

`pReqSize`

Pointer to minimal length of array for non-zero weights. Can be NULL.

#### 15.5.5.11 COPT\_GetQConstr

##### Synopsis

```
int COPT_GetQConstr(copt_prob *prob, int qConstrIdx, int *qMatRow,
int *qMatCol, double *qMatElem, int nQElemSize, int *pQReqSize, int
*rowMatIdx, double *rowMatElem, char *cRowSense, double *dRowBound,
int nElemSize, int *pReqSize)
```

##### Description

Get quadratic constraint.

In general, users need to call this function twice to accomplish the task. Firstly, by passing NULL to arguments `qMatRow`, `qMatCol`, `qMatElem`, `rowMatIdx` and `rowMatElem`, we get number of non-zero quadratic terms by `pQReqSize` and number of non-zero linear terms by `pReqSize` specified by `qConstrIdx`. Secondly,

allocate sufficient memory for the quadratic terms and the linear terms, and call this function again to extract the quadratic constraint. If the memory of the array of the quadratic terms passed to function is not sufficient, then return the first `nQElemSize` quadratic terms, and the minimal required length of quadratic terms by `pQReqSize`. If the memory of the array of the linear terms passed to function is not sufficient, then return the first `nElemSize` linear terms, and the minimal required length of linear terms by `pReqSize`.

### Arguments

`prob`

The COPT problem.

`qConstrIdx`

Index of the quadratic constraint.

`qMatRow`

Row index of non-zero quadratic terms of the quadratic constraint (row).

`qMatCol`

Column index of non-zero quadratic terms of the quadratic constraint (row).

`qMatElem`

Values of non-zero quadratic terms of the quadratic constraint (row).

`nQElemSize`

Length of array for non-zero quadratic terms of the quadratic constraint (row).

`pQReqSize`

Pointer to minimal length of array for non-zero quadratic terms of the quadratic constraint (row). Can be NULL.

`rowMatIdx`

Column index of non-zero linear terms of the quadratic constraint (row).

`rowMatElem`

Values of non-zero linear terms of the quadratic constraint (row).

`cRowSense`

The sense of the quadratic constraint (row).

`dRowBound`

Right hand side of the quadratic constraint (row).

`nElemSize`

Length of array for non-zero linear terms of the quadratic constraint (row).

`pReqSize`

Pointer to minimal length of array for non-zero linear terms of the quadratic constraint (row). Can be NULL.

### 15.5.5.12 COPT\_GetPSDConstr

#### Synopsis

```
int COPT_GetPSDConstr(copt_prob *prob, int psdConstrIdx, int
*psdColIdx, int *symMatIdx, int nColSize, int *pColReqSize,
int *rowMatIdx, double *rowMatElem, double *dRowLower, double
*dRowUpper, int nElemSize, int *pReqSize)
```

#### Description

Get PSD constraint.

In general, users need to call this function twice to accomplish the task. Firstly, by passing NULL to arguments `psdColIdx` and `symMatIdx`, we get number of PSD terms by `pColReqSize` specified by `psdConstrIdx`, by passing NULL to arguments `rowMatIdx` and `rowMatElem`, we get number of linear terms by `pReqSize` specified by `qConstrIdx`. Secondly, allocate sufficient memory for the PSD terms and the linear terms, and call this function again to extract the PSD constraint. If the memory of the array of the PSD terms passed to function is not sufficient, then return the first `nColSize` PSD terms, and the minimal required length of PSD terms by `pColReqSize`. If the memory of the array of the linear terms passed to function is not sufficient, then return the first `nElemSize` linear terms, and the minimal required length of linear terms by `pReqSize`.

#### Arguments

`prob`

The COPT problem.

`psdConstrIdx`

PSD constraint index.

`psdColIdx`

PSD variable index.

`symMatIdx`

Symmetric matrix index.

`nColSize`

Length of array for PSD terms of the PSD constraint.

`pColReqSize`

Pointer to minimal length of array for PSD terms of the PSD constraint.  
Can be NULL.

`rowMatIdx`

Column index of non-zero linear terms of the PSD constraint.

`rowMatElem`

Values of non-zero linear terms of the PSD constraint.

`dRowLower`

Pointer to lower bound of the PSD constraint.

`dRowUpper`

Pointer to upper bound of the PSD constraint.

`nElemSize`

Length of array for non-zero linear terms of the PSD constraint.

`pReqSize`

Pointer to minimal length of array for non-zero linear terms of the PSD constraint (row). Can be NULL.

#### 15.5.5.13 COPT\_GetIndicator

##### Synopsis

```
int COPT_GetIndicator(copt_prob *prob, int rowIdx, int *binColIdx,  
int *binColVal, int *nRowMatCnt, int *rowMatIdx, double *rowMatElem,  
char *cRowSense, double *dRowBound, int nElemSize, int *pReqSize)
```

##### Description

Get the data of an indicator constraint. In general, users need to call this function twice to accomplish the task. Firstly, by passing NULL to arguments `nRowMatCnt`, `rowMatIdx` and `rowMatElem`, we get number of non-zeros elements by `pReqSize` specified by `rowIdx`. Secondly, allocate sufficient memory for sparse row vector and call this function again to extract data. If the memory of sparse row vector passed to function is not sufficient, then return the first `nElemSize` non-zero elements, and the minimal required length of non-zero elements by `pReqSize`.

##### Arguments

`prob`

The COPT problem.

`rowIdx`

Index of the indicator constraint.

`binColIdx`

Index of the indicator variable (column).

`binColVal`

Value of the indicator variable (column).

`nRowMatCnt`

Number of non-zeros elements in the linear constraint (row).

`rowMatIdx`

Column index of non-zeros elements in the linear constraint (row).

`rowMatElem`

Values of non-zero elements in the linear constraint (row).

`cRowSense`

The sense of the linear constraint (row).

`dRowBound`

Right hand side of the linear constraint (row).

`nElemSize`

Length of array for non-zero coefficients.

`pReqSize`

Pointer to minimal length of array for non-zero coefficients. Can be NULL.

#### 15.5.5.14 COPT\_GetColIdx

##### Synopsis

```
int COPT_GetColIdx(copt_prob *prob, const char *colName, int
*p_iCol)
```

##### Description

Get index of column by name.

##### Arguments

prob

The COPT problem.

colName

Name of column.

p\_iCol

Pointer to index of column.

#### 15.5.5.15 COPT\_GetPSDColIdx

##### Synopsis

```
int COPT_GetPSDColIdx(copt_prob *prob, const char *psdColName, int
*p_iPSDCol)
```

##### Description

Get index of PSD variable by name.

##### Arguments

prob

The COPT problem.

psdColName

Name of PSD variable.

p\_iPSDCol

Pointer to index of PSD variable.

#### 15.5.5.16 COPT\_GetRowIdx

##### Synopsis

```
int COPT_GetRowIdx(copt_prob *prob, const char *rowName, int
*p_iRow)
```

##### Description

Get index of row by name.

##### Arguments

prob

The COPT problem.

rowName

Name of row.

`p_iRow`

Pointer to index of row.

#### **15.5.5.17 COPT\_GetQConstrIdx**

##### **Synopsis**

```
int COPT_GetQConstrIdx(copt_prob *prob, const char *qConstrName, int
*p_iQConstr)
```

##### **Description**

Get index of quadratic constraint by name.

##### **Arguments**

`prob`

The COPT problem.

`qConstrName`

Name of quadratic constraint.

`p_iQConstr`

Pointer to index of quadratic constraint.

#### **15.5.5.18 COPT\_GetPSDConstrIdx**

##### **Synopsis**

```
int COPT_GetPSDConstrIdx(copt_prob *prob, const char *psdConstrName,
int *p_iPSDConstr)
```

##### **Description**

Get index of PSD constraint by name.

##### **Arguments**

`prob`

The COPT problem.

`psdConstrName`

Name of PSD constraint.

`p_iPSDConstr`

Pointer to index of PSD constraint.

#### **15.5.5.19 COPT\_GetColInfo**

##### **Synopsis**

```
int COPT_GetColInfo(copt_prob *prob, const char *infoName, int num,
const int *list, double *info)
```

##### **Description**

Get information of column. If `list` is NULL, then information of the first `num` columns will be returned.

##### **Arguments**

`prob`

The COPT problem.

**infoName**

Name of information. Please refer to *Information* for supported information.

**num**

Number of columns.

**list**

Index of columns. Can be NULL.

**info**

Array of information.

#### 15.5.5.20 COPT\_GetPSDColInfo

##### Synopsis

```
int COPT_GetPSDColInfo(copt_prob *prob, const char *infoName, int
iCol, double *info)
```

##### Description

Get information of PSD variable.

##### Arguments

**prob**

The COPT problem.

**infoName**

Name of information. Please refer to *Information* for supported information.

**iCol**

Index of PSD variable.

**info**

Array of information.

#### 15.5.5.21 COPT\_GetRowInfo

##### Synopsis

```
int COPT_GetRowInfo(copt_prob *prob, const char *infoName, int num,
const int *list, double *info)
```

##### Description

Get information of row. If **list** is NULL, then information of the first **num** rows will be returned.

##### Arguments

**prob**

The COPT problem.

**infoName**

Name of information. Please refer to *Information* for supported information.



`num`  
Number of rows.

`list`  
Index of rows. Can be NULL.

`info`  
Array of information.

#### 15.5.5.22 COPT\_GetQConstrInfo

##### Synopsis

```
int COPT_GetQConstrInfo(copt_prob *prob, const char *infoName, int
num, const int *list, double *info)
```

##### Description

Get information of quadratic constraints. If `list` is NULL, then information of the first `num` quadratic constraints will be returned.

##### Arguments

`prob`  
The COPT problem.

`infoName`  
Name of information. Please refer to *Information* for supported information.

`num`  
Number of quadratic constraints.

`list`  
Index of quadratic constraints. Can be NULL.

`info`  
Array of information.

#### 15.5.5.23 COPT\_GetPSDConstrInfo

##### Synopsis

```
int COPT_GetPSDConstrInfo(copt_prob *prob, const char *infoName, int
num, const int* list, double *info)
```

##### Description

Get information of PSD constraints. If `list` is NULL, then information of the first `num` PSD constraints will be returned.

##### Arguments

`prob`  
The COPT problem.

`infoName`  
Name of information. Please refer to *Information* for supported information.

`num`

Number of PSD constraints.

`list`

Index of PSD constraints. Can be NULL.

`info`

Array of information.

#### 15.5.5.24 COPT\_GetColType

##### Synopsis

```
int COPT_GetColType(copt_prob *prob, int num, const int *list, char
*type)
```

##### Description

Get types of columns. If `list` is NULL, then types of the first `num` columns will be returned.

##### Arguments

`prob`

The COPT problem.

`num`

Number of columns.

`list`

Index of columns. Can be NULL.

`type`

Types of columns.

#### 15.5.5.25 COPT\_GetColBasis

##### Synopsis

```
int COPT_GetColBasis(copt_prob *prob, int num, const int *list, int
*colBasis)
```

##### Description

Get basis status of columns. If `list` is NULL, then basis status of the first `num` columns will be returned.

##### Arguments

`prob`

The COPT problem.

`num`

Number of columns.

`list`

Index of columns. Can be NULL.

`colBasis`

Basis status of columns.

#### **15.5.5.26 COPT\_GetRowBasis**

##### **Synopsis**

```
int COPT_GetRowBasis(copt_prob *prob, int num, const int *list, int
*rowBasis)
```

##### **Description**

Get basis status of rows. If `list` is NULL, then basis status of the first `num` rows will be returned.

##### **Arguments**

`prob`

The COPT problem.

`num`

Number of rows.

`list`

Index of rows. Can be NULL.

`rowBasis`

Basis status of rows.

#### **15.5.5.27 COPT\_GetQConstrSense**

##### **Synopsis**

```
int COPT_GetQConstrSense(copt_prob *prob, int num, const int *list,
char *sense)
```

##### **Description**

Get senses of quadratic constraints. If `list` is NULL, then types of the first `num` quadratic constraints will be returned.

##### **Arguments**

`prob`

The COPT problem.

`num`

Number of quadratic constraints.

`list`

Index of quadratic constraints. Can be NULL.

`sense`

Array of senses.

#### 15.5.5.28 COPT\_GetQConstrRhs

##### Synopsis

```
int COPT_GetQConstrRhs(copt_prob *prob, int num, const int *list,  
double *rhs)
```

##### Description

Get RHS of quadratic constraints. If `list` is NULL, then types of the first `num` quadratic constraints will be returned.

##### Arguments

`prob`

The COPT problem.

`num`

Number of quadratic constraints.

`list`

Index of quadratic constraints. Can be NULL.

`rhs`

Array of RHS.

#### 15.5.5.29 COPT\_GetColName

##### Synopsis

```
int COPT_GetColName(copt_prob *prob, int iCol, char *buff, int  
buffSize, int *pReqSize)
```

##### Description

Get name of column by index. If memory of `buff` is not sufficient, then return the first `buffSize` length of sub-string, and the length of name requested by `pReqSize`. If `buff` is NULL, then we can get the length of name requested by `pReqSize`.

##### Arguments

`prob`

The COPT problem.

`iCol`

Index of column.

`buff`

Buffer for storing name.

`buffSize`

Length of the buffer.

`pReqSize`

Length of the requested name. Can be NULL.

#### 15.5.5.30 COPT\_GetPSDColName

##### Synopsis

```
int COPT_GetPSDColName(copt_prob *prob, int iPSDCol, char *buff, int
buffSize, int *pReqSize)
```

##### Description

Get name of PSD variable by index. If memory of `buff` is not sufficient, then return the first `buffSize` length of sub-string, and the length of name requested by `pReqSize`. If `buff` is NULL, then we can get the length of name requested by `pReqSize`.

##### Arguments

`prob`

The COPT problem.

`iPSDCol`

Index of PSD variable.

`buff`

Buffer for storing name.

`buffSize`

Length of the buffer.

`pReqSize`

Length of the requested name. Can be NULL.

#### 15.5.5.31 COPT\_GetRowName

##### Synopsis

```
int COPT_GetRowName(copt_prob *prob, int iRow, char *buff, int
buffSize, int *pReqSize)
```

##### Description

Get name of row by index. If memory of `buff` is not sufficient, then return the first `buffSize` length of sub-string, and the length of name requested by `pReqSize`. If `buff` is NULL, then we can get the length of name requested by `pReqSize`.

##### Arguments

`prob`

The COPT problem.

`iRow`

Index of row.

`buff`

Buffer for storing name.

`buffSize`

Length of the buffer.

`pReqSize`

Length of the requested name. Can be NULL.

#### 15.5.5.32 COPT\_GetQConstrName

##### Synopsis

```
int COPT_GetQConstrName(copt_prob *prob, int iQConstr, char *buff,  
int buffSize, int *pReqSize)
```

##### Description

Get name of quadratic constraint by index. If memory of **buff** is not sufficient, then return the first **buffSize** length of sub-string, and the length of name requested by **pReqSize**. If **buff** is NULL, then we can get the length of name requested by **pReqSize**.

##### Arguments

**prob**

The COPT problem.

**iQConstr`**

Index of quadratic constraint.

**buff**

Buffer for storing name.

**buffSize**

Length of the buffer.

**pReqSize**

Length of the requested name. Can be NULL.

#### 15.5.5.33 COPT\_GetPSDConstrName

##### Synopsis

```
int COPT_GetPSDConstrName(copt_prob *prob, int iPSDConstr, char  
*buff, int buffSize, int *pReqSize)
```

##### Description

Get name of PSD constraint by index. If memory of **buff** is not sufficient, then return the first **buffSize** length of sub-string, and the length of name requested by **pReqSize**. If **buff** is NULL, then we can get the length of name requested by **pReqSize**.

##### Arguments

**prob**

The COPT problem.

**iPSDConstr`**

Index of PSD constraint.

**buff**

Buffer for storing name.

**buffSize**

Length of the buffer.

**pReqSize**

Length of the requested name. Can be NULL.

## 15.5.6 Accessing parameters and attributes

### 15.5.6.1 COPT\_SetIntParam

#### Synopsis

```
int COPT_SetIntParam(copt_prob *prob, const char *paramName, int
intParam)
```

#### Description

Sets an integer parameter.

#### Arguments

`prob`

The COPT problem.

`paramName`

The name of the integer parameter.

`intParam`

The value of the integer parameter.

### 15.5.6.2 COPT\_GetIntParam, COPT\_GetIntParamDef/Min/Max

#### Synopsis

```
int COPT_GetIntParam(copt_prob *prob, const char *paramName, int
*p_intParam)
```

```
int COPT_GetIntParamDef(copt_prob *prob, const char *paramName, int
*p_intParam)
```

```
int COPT_GetIntParamMin(copt_prob *prob, const char *paramName, int
*p_intParam)
```

```
int COPT_GetIntParamMax(copt_prob *prob, const char *paramName, int
*p_intParam)
```

#### Description

Gets the

current

default

minimal

maximal

value of an integer parameter.

#### Arguments

`prob`

The COPT problem.

`paramName`

The name of the integer parameter.

`p_intParam`

Pointer to the value of the integer parameter.

### 15.5.6.3 COPT\_SetDblParam

#### Synopsis

```
int COPT_SetDblParam(copt_prob *prob, const char *paramName, double
dblParam)
```

#### Description

Sets a double parameter.

#### Arguments

**prob**

The COPT problem.

**paramName**

The name of the double parameter.

**dblParam**

The value of the double parameter.

### 15.5.6.4 COPT\_GetDblParam, COPT\_GetDblParamDef/Min/Max

#### Synopsis

```
int COPT_GetDblParam(copt_prob *prob, const char *paramName, double
*p_dblParam)
```

```
int COPT_GetDblParamDef(copt_prob *prob, const char *paramName,
double *p_dblParam)
```

```
int COPT_GetDblParamMin(copt_prob *prob, const char *paramName,
double *p_dblParam)
```

```
int COPT_GetDblParamMax(copt_prob *prob, const char *paramName,
double *p_dblParam)
```

#### Description

Gets the

current

default

minimal

maximal

value of a double parameter.

#### Arguments

**prob**

The COPT problem.

**paramName**

The name of the double parameter.

**p\_dblParam**

Pointer to the value of the double parameter.



#### 15.5.6.5 COPT\_ResetParam

##### Synopsis

```
int COPT_ResetParam(copt_prob *prob)
```

##### Description

Reset parameters to default settings.

##### Arguments

prob

The COPT problem.

#### 15.5.6.6 COPT\_GetIntAttr

##### Synopsis

```
int COPT_GetIntAttr(copt_prob *prob, const char *attrName, int  
*p_intAttr)
```

##### Description

Gets the value of an integer attribute.

##### Arguments

prob

The COPT problem.

attrName

The name of the integer attribute.

p\_intAttr

Pointer to the value of the integer attribute.

#### 15.5.6.7 COPT\_GetDblAttr

##### Synopsis

```
int COPT_GetDblAttr(copt_prob *prob, const char *attrName, int  
*p_dblAttr)
```

##### Description

Gets the value of a double attribute.

##### Arguments

prob

The COPT problem.

attrName

The name of the double attribute.

p\_dblAttr

Pointer to the value of the double attribute.

#### 15.5.6.8 COPT\_WriteParam

##### Synopsis

```
int COPT_WriteParam(copt_prob *prob, const char *parfilename)
```

##### Description

Writes user defined parameters to a file. This API function will write out all the parameters that are different from their default values.

##### Arguments

`prob`

The COPT problem.

`parfilename`

The path to the parameter file.

#### 15.5.6.9 COPT\_WriteParamStr

##### Synopsis

```
int COPT_WriteParamStr(copt_prob *prob, char *str, int nStrSize, int *pReqSize)
```

##### Description

Writes the modified parameters to a string buffer.

##### Arguments

`prob`

The COPT problem.

`str`

String buffer of modified parameters.

`nStrSize`

The size of string buffer.

`pReqSize`

Minimum space requirement of string buffer for modified parameters.

#### 15.5.6.10 COPT\_ReadParam

##### Synopsis

```
int COPT_ReadParam(copt_prob *prob, const char *parfilename)
```

##### Description

Reads and applies parameters settings as defined in the parameter file.

##### Arguments

`prob`

The COPT problem.

`parfilename`

The path to the parameter file.

#### **15.5.6.11 COPT\_ReadParamStr**

##### **Synopsis**

```
int COPT_ReadParamStr(copt_prob *prob, const char *strParam)
```

##### **Description**

Read parameter settings from string buffer, and set parameters in COPT.

##### **Arguments**

`prob`

The COPT problem.

`strParam`

String buffer of parameter settings.

### **15.5.7 Logging utilities**

#### **15.5.7.1 COPT\_SetLogFile**

##### **Synopsis**

```
int COPT_SetLogFile(copt_prob *prob, char *logfilename)
```

##### **Description**

Set log file for the problem.

##### **Arguments**

`prob`

The COPT problem.

`logfilename`

The path to the log file.

#### **15.5.7.2 COPT\_SetLogCallback**

##### **Synopsis**

```
int COPT_SetLogCallback(copt_prob *prob, void (*logcb)(char *msg,  
void *userdata), void *userdata)
```

##### **Description**

Set message callback for the problem.

##### **Arguments**

`prob`

The COPT problem.

`logcb`

Callback function for message.

`userdata`

User defined data. The data will be passed to the solver without modification.

## 15.5.8 MIP start utilities

### 15.5.8.1 COPT\_AddMipStart

#### Synopsis

```
int COPT_AddMipStart(copt_prob *prob, int num, const int *list,  
double *colVal)
```

#### Description

Add MIP start information for the problem. If `list` is NULL, then information of the first `num` columns will be added.

One MIP start information will be added for each call to this function.

#### Arguments

`prob`

The COPT problem.

`num`

Number of variables (columns).

`list`

Index of variables (columns). Can be NULL.

`colVal`

MIP start information.

### 15.5.8.2 COPT\_ReadMst

#### Synopsis

```
int COPT_ReadMst(copt_prob *prob, const char *mstfilename)
```

#### Description

Read MIP start information from file, and used as initial solution for the problem.

#### Arguments

`prob`

The COPT problem.

`mstfilename`

The path to the MIP start file.

### 15.5.8.3 COPT\_WriteMst

#### Synopsis

```
int COPT_WriteMst(copt_prob *prob, const char *mstfilename)
```

#### Description

Write solution or existed MIP start information in problem to file.

#### Arguments

`prob`

The COPT problem.

mstfilename

The path to the MIP start file.

## 15.5.9 IIS utilities

### 15.5.9.1 COPT\_ComputeIIS

#### Synopsis

```
int COPT_ComputeIIS(copt_prob *prob)
```

#### Description

Compute IIS (Irreducible Inconsistent Subsystem) for infeasible problem.

#### Arguments

prob

The COPT problem.

### 15.5.9.2 COPT\_GetColLowerIIS

#### Synopsis

```
int COPT_GetColLowerIIS(copt_prob *prob, int num, const int *list,  
int *colLowerIIS)
```

#### Description

Get IIS status of lower bounds of columns. If `list` is `NULL`, then IIS status of the first `num` columns will be returned.

#### Arguments

prob

The COPT problem.

num

Number of columns.

list

Index of columns. Can be `NULL`.

colLowerIIS

IIS status of lower bounds of columns.

### 15.5.9.3 COPT\_GetColUpperIIS

#### Synopsis

```
int COPT_GetColUpperIIS(copt_prob *prob, int num, const int *list,  
int *colUpperIIS)
```

#### Description

Get IIS status of upper bounds of columns. If `list` is `NULL`, then IIS status of the first `num` columns will be returned.

#### Arguments

prob

The COPT problem.

num

Number of columns.

list

Index of columns. Can be NULL.

colUpperIIS

IIS status of upper bounds of columns.

#### 15.5.9.4 COPT\_GetRowLowerIIS

##### Synopsis

```
int COPT_GetRowLowerIIS(copt_prob *prob, int num, const int *list,
int *rowLowerIIS)
```

##### Description

Get IIS status of lower bounds of rows. If `list` is NULL, then IIS status of the first `num` rows will be returned.

##### Arguments

prob

The COPT problem.

num

Number of rows.

list

Index of rows. Can be NULL.

rowLowerIIS

IIS status of lower bounds of rows.

#### 15.5.9.5 COPT\_GetRowUpperIIS

##### Synopsis

```
int COPT_GetRowUpperIIS(copt_prob *prob, int num, const int *list,
int *rowUpperIIS)
```

##### Description

Get IIS status of upper bounds of rows. If `list` is NULL, then IIS status of the first `num` rows will be returned.

##### Arguments

prob

The COPT problem.

num

Number of rows.

list

Index of rows. Can be NULL.

rowUpperIIS

IIS status of upper bounds of rows.

#### **15.5.9.6 COPT\_GetSOSIIS**

##### **Synopsis**

```
int COPT_GetSOSIIS(copt_prob *prob, int num, const int *list, int
*sosIIS)
```

##### **Description**

Get IIS status of SOS constraints. If `list` is NULL, then IIS status of the first `num` SOS constraints will be returned.

##### **Arguments**

`prob`

The COPT problem.

`num`

Number of SOS constraints.

`list`

Index of SOS constraints. Can be NULL.

`sosIIS`

IIS status of SOS constraints.

#### **15.5.9.7 COPT\_GetIndicatorIIS**

##### **Synopsis**

```
int COPT_GetIndicatorIIS(copt_prob *prob, int num, const int *list,
int *indicatorIIS)
```

##### **Description**

Get IIS status of indicator constraints. If `list` is NULL, then IIS status of the first `num` indicator constraints will be returned.

##### **Arguments**

`prob`

The COPT problem.

`num`

Number of indicator constraints.

`list`

Index of indicator constraints. Can be NULL.

`indicatorIIS`

IIS status of indicator constraints.

## 15.5.10 Feasibility relaxation utilities

### 15.5.10.1 COPT\_FeasRelax

#### Synopsis

```
int COPT_FeasRelax(copt_prob *prob, double *colLowPen, double
*colUppPen, double *rowBndPen, double *rowUppPen)
```

#### Description

Compute feasibility relaxation to infeasible problem.

#### Arguments

`prob`

The COPT problem.

`colLowPen`

Penalty for lower bounds of columns. If NULL, then no relaxation for lower bounds of columns are allowed; If penalty in `colLowPen` is COPT\_INFINITY, then no relaxation is allowed for corresponding bound.

`colUppPen`

Penalty for upper bounds of columns. If NULL, then no relaxation for upper bounds of columns are allowed; If penalty in `colUppen` is COPT\_INFINITY, then no relaxation is allowed for corresponding bound.

`rowBndPen`

Penalty for bounds of rows. If NULL, then no relaxation for bounds of rows are allowed; If penalty in `rowBndPen` is COPT\_INFINITY, then no relaxation is allowed for corresponding bound.

`rowUppPen`

Penalty for upper bounds of rows. If problem has two-sided rows, and `rowUppPen` is not NULL, then `rowUppPen` is penalty for upper bounds of rows; If penalty in `rowUppPen` is COPT\_INFINITY, then no relaxation is allowed for corresponding bound.

**Note:** Normally, just set `rowUppPen` to NULL.

### 15.5.10.2 COPT\_WriteRelax

#### Synopsis

```
int COPT_WriteRelax(copt_prob *prob, const char *relaxfilename)
```

#### Description

Write feasrelax problem to file.

#### Arguments

`prob`

The COPT problem.

`relaxfilename`

Name of feasrelax problem file.



## 15.5.11 Parameter tuning utilities

### 15.5.11.1 COPT\_Tune

#### Synopsis

```
int COPT_Tune(copt_prob *prob)
```

#### Description

Parameter tuning of the model.

#### Arguments

prob

COPT model.

### 15.5.11.2 COPT\_LoadTuneParam

#### Synopsis

```
int COPT_LoadTuneParam(copt_prob *prob, int idx)
```

#### Description

Load the parameter tuning results of the specified number into the model.

#### Arguments

prob

COPT model.

idx

The number of the parameter tuning result.

### 15.5.11.3 COPT\_ReadTune

#### Synopsis

```
int COPT_ReadTune(copt_prob *prob, const char *tunefilename)
```

#### Description

Read the parameter combination to be tuned from the tuning file to the model.

#### Arguments

prob

COPT model.

tunefilename

Tuning file names.

#### 15.5.11.4 COPT\_WriteTuneParam

##### Synopsis

```
int COPT_WriteTuneParam(copt_prob *prob, int idx, const char
*parfilename)
```

##### Description

Output the parameter tuning result of the specified number to the parameter file.

##### Arguments

prob

COPT model.

idx

The number of the parameter tuning result.

parfilename

parameter file name.

### 15.5.12 Other API functions

#### 15.5.12.1 COPT\_GetBanner

##### Synopsis

```
int COPT_GetBanner(char *buff, int buffSize)
```

##### Description

Obtains a C-style string as banner, which describes the COPT version information.

##### Arguments

buff

A buffer for holding the resulting string.

buffSize

The size of the above buffer.

#### 15.5.12.2 COPT\_GetRetcodeMsg

##### Synopsis

```
int COPT_GetRetcodeMsg(int code, char *buff, int buffSize)
```

##### Description

Obtains a C-style string which explains a return code value in plain text.

##### Arguments

code

The return code from a COPT API function.

buff

A buffer for holding the resulting string.

buffSize

The size of the above buffer.

### 15.5.12.3 COPT\_Interrupt

#### Synopsis

```
int COPT_Interrupt(copt_prob *prob)
```

#### Description

Interrupt solving process of current problem.

#### Arguments

prob

The COPT problem.

# Chapter 16

## C++ API Reference

The **Cardinal Optimizer** provides C++ API library. This chapter documents all COPT constants, including parameters and attributes, and API functions for C++ applications.

### 16.1 Constants

All C++ constants are the same as C constants. Please refer to *C API Reference: Constants* for more details.

### 16.2 Attributes

All C++ attributes are the same as C attributes. Please refer to *C API Reference: Attributes* for more details.

In the C++ API, user can get the attribute value by specifying the attribute name. The provided functions are as follows, please refer to *C++ API: Model Class* for details.

- `Model::GetIntAttr()` : Get value of a COPT integer attribute.
- `Model::GetDblAttr()` : Get value of a COPT double attribute.

### 16.3 Parameters

All C++ parameters are the same as C parameters. Please refer to *C API Reference: Parameters* for more details.

In the C++ API, user can get and set the parameter value by specifying the parameter name. The provided functions are as follows, please refer to *C++ Model class* for details.

- Get detailed information of the specified parameter (current value/max/min):  
`Model::GetParamInfo()`
- Get the current value of the specified integer/double parameter: `Model::GetIntParam()` / `Model::GetDblParam()`
- Set the specified integer/double parameter value: `Model::SetIntParam()` / `Model::SetDblParam()`

## 16.4 C++ Modeling Classes

This chapter documents COPT C++ interface. Users may refer to C++ classes described below for details of how to construct and solve C++ models.

### 16.4.1 Envr

Essentially, any C++ application using Cardinal Optimizer should start with a COPT environment. COPT models are always associated with a COPT environment. User must create an environment object before populating models. User generally only need a single environment object in program.

#### 16.4.1.1 Envr::Envr()

Constructor of COPT Envr object.

##### Synopsis

```
Envr()
```

#### 16.4.1.2 Envr::Envr()

Constructor of COPT Envr object, given a license folder.

##### Synopsis

```
Envr(const char *szLicDir)
```

##### Arguments

szLicDir: directory having local license or client config file.

#### 16.4.1.3 Envr::Envr()

Constructor of COPT Envr object, given an Envr config object.

##### Synopsis

```
Envr(const EnvrConfig &config)
```

##### Arguments

config: Envr config object holding settings for remote connection.

#### 16.4.1.4 Envr::Close()

close remote connection and token becomes invalid for all problems in current envr.

##### Synopsis

```
void Close()
```

#### 16.4.1.5 `Envr::CreateModel()`

Create a COPT model object.

##### Synopsis

```
Model CreateModel(const char *szName)
```

##### Arguments

`szName`: customized model name.

##### Return

a COPT model object.

#### 16.4.2 `EnvrConfig`

If user connects to COPT remote services, such as floating token server or compute cluster, it is necessary to add config settings with `EnvrConfig` object.

##### 16.4.2.1 `EnvrConfig::EnvrConfig()`

Constructor of COPT environment config object.

##### Synopsis

```
EnvrConfig()
```

##### 16.4.2.2 `EnvrConfig::Set()`

Set config settings in terms of name-value pair.

##### Synopsis

```
void Set(const char *szName, const char *szValue)
```

##### Arguments

`szName`: keyword of a config setting

`szValue`: value of a config setting

#### 16.4.3 `Model`

In general, a COPT model consists of a set of variables, a (linear) objective function on these variables, a set of constraints on there varaibles, etc. COPT model class encapsulates all required methods for constructing a COPT model.

##### 16.4.3.1 `Model::AddCone()`

Add a cone constraint to a model, given its dimension.

##### Synopsis

```
Cone AddCone(  
    int dim,  
    int type,  
    char *pvtype,  
    const char *szPrefix)
```

**Arguments**

**dim:** dimension of the cone constraint.  
**type:** type of the cone constraint.  
**pvtype:** types of variables in the cone.  
**szPrefix:** name prefix of variables in the cone.

**Return**

object of new cone constraint.

**16.4.3.2 Model::AddCone()**

Add a cone constraint to model.

**Synopsis**

```
Cone AddCone(const ConeBuilder &builder)
```

**Arguments**

**builder:** builder for new cone constraint.

**Return**

new cone constraint object.

**16.4.3.3 Model::AddCone()**

Add a cone constraint to model.

**Synopsis**

```
Cone AddCone(const VarArray &vars, int type)
```

**Arguments**

**vars:** variables that participate in the cone constraint.  
**type:** type of the cone constraint.

**Return**

object of new cone constraint.

**16.4.3.4 Model::AddConstr()**

Add a linear constraint to model.

**Synopsis**

```
Constraint AddConstr(  
    const Expr &expr,  
    char sense,  
    double rhs,  
    const char *szName)
```

**Arguments**

**expr:** expression for the new constraint.  
**sense:** sense for new linear constraint, other than range sense.  
**rhs:** right hand side value for the new constraint.  
**szName:** optional, name of new constraint.

**Return**

new constraint object.

**16.4.3.5 Model::AddConstr()**

Add a linear constraint to model.

**Synopsis**

```
Constraint AddConstr(  
    const Expr &lhs,  
    char sense,  
    const Expr &rhs,  
    const char *szName)
```

**Arguments**

**lhs:** left hand side expression for the new constraint.  
**sense:** sense for new linear constraint, other than range sense.  
**rhs:** right hand side expression for the new constraint.  
**szName:** optional, name of new constraint.

**Return**

new constraint object.

**16.4.3.6 Model::AddConstr()**

Add a linear constraint to model.

**Synopsis**

```
Constraint AddConstr(  
    const Expr &expr,  
    double lb,  
    double ub,  
    const char *szName)
```

**Arguments**

**expr:** expression for the new constraint.  
**lb:** lower bound for the new constraint.  
**ub:** upper bound for the new constraint  
**szName:** optional, name of new constraint.

**Return**

new constraint object.



#### 16.4.3.7 Model::AddConstr()

Add a linear constraint to a model.

##### Synopsis

```
Constraint AddConstr(const ConstrBuilder &builder, const char
*szName)
```

##### Arguments

builder: builder for the new constraint.

szName: optional, name of new constraint.

##### Return

new constraint object.

#### 16.4.3.8 Model::AddConstrs()

Add linear constraints to model.

##### Synopsis

```
ConstrArray AddConstrs(
    int count,
    char *pSense,
    double *pRhs,
    const char *szPrefix)
```

##### Arguments

count: number of constraints added to model.

pSense: sense array for new linear constraints, other than range sense.

pRhs: right hand side values for new variables.

szPrefix: name prefix for new constraints.

##### Return

array of new constraint objects.

#### 16.4.3.9 Model::AddConstrs()

Add linear constraints to a model.

##### Synopsis

```
ConstrArray AddConstrs(
    int count,
    double *pLower,
    double *pUpper,
    const char *szPrefix)
```

##### Arguments

count: number of constraints added to the model.

pLower: lower bounds of new constraints.

pUpper: upper bounds of new constraints.

szPrefix: name prefix for new constraints.

**Return**

array of new constraint objects.

**16.4.3.10 Model::AddConstrs()**

Add linear constraints to a model.

**Synopsis**

```
ConstrArray AddConstrs(  
    int count,  
    double *pLower,  
    double *pUpper,  
    const char *szNames,  
    int len)
```

**Arguments**

count: number of constraints added to the model.

pLower: lower bounds of new constraints.

pUpper: upper bounds of new constraints.

szNames: name buffer of new constraints.

len: length of the name buffer.

**Return**

array of new constraint objects.

**16.4.3.11 Model::AddConstrs()**

Add linear constraints to a model.

**Synopsis**

```
ConstrArray AddConstrs(const ConstrBuilderArray &builders, const  
    char *szPrefix)
```

**Arguments**

builders: builders for new constraints.

szPrefix: name prefix for new constraints.

**Return**

array of new constraint objects.

#### 16.4.3.12 Model::AddConstrs()

Add linear constraints to model.

##### Synopsis

```
ConstrArray AddConstrs(  
    const ConstrBuilderArray &builders,  
    const char *szNames,  
    int len)
```

##### Arguments

**builders:** builders for new constraints.

**szNames:** name buffer of new constraints.

**len:** length of the name buffer.

##### Return

array of new constraint objects.

#### 16.4.3.13 Model::AddDenseMat()

Add a dense symmetric matrix to a model.

##### Synopsis

```
SymMatrix AddDenseMat(  
    int dim,  
    double *pVals,  
    int len)
```

##### Arguments

**dim:** dimension of the dense symmetric matrix.

**pVals:** array of non

**len:** length of value array.

##### Return

new symmetric matrix object.

#### 16.4.3.14 Model::AddDenseMat()

Add a dense symmetric matrix to a model.

##### Synopsis

```
SymMatrix AddDenseMat(int dim, double val)
```

##### Arguments

**dim:** dimension of dense symmetric matrix.

**val:** value to fill dense symmetric matrix.

##### Return

new symmetric matrix object.

#### 16.4.3.15 Model::AddDiagMat()

Add a diagonal matrix to a model.

##### Synopsis

```
SymMatrix AddDiagMat(int dim, double val)
```

##### Arguments

dim: dimension of diagonal matrix.

val: value to fill diagonal elements.

##### Return

new diagonal matrix object.

#### 16.4.3.16 Model::AddDiagMat()

Add a diagonal matrix to a model.

##### Synopsis

```
SymMatrix AddDiagMat(  
    int dim,  
    double *pVals,  
    int len)
```

##### Arguments

dim: dimension of diagonal matrix.

pVals: array of values of diagonal elements.

len: length of value array.

##### Return

new diagonal matrix object.

#### 16.4.3.17 Model::AddDiagMat()

Add a diagonal matrix to a model.

##### Synopsis

```
SymMatrix AddDiagMat(  
    int dim,  
    double val,  
    int offset)
```

##### Arguments

dim: dimension of diagonal matrix.

val: value to fill diagonal elements.

offset: shift distance against diagonal line.

##### Return

new diagonal matrix object.

#### 16.4.3.18 Model::AddDiagMat()

Add a diagonal matrix to a model.

##### Synopsis

```
SymMatrix AddDiagMat(  
    int dim,  
    double *pVals,  
    int len,  
    int offset)
```

##### Arguments

**dim**: dimension of diagonal matrix.

**pVals**: array of values of diagonal elements.

**len**: length of value array.

**offset**: shift distance against diagonal line.

##### Return

new diagonal matrix object.

#### 16.4.3.19 Model::AddEyeMat()

Add an identity matrix to a model.

##### Synopsis

```
SymMatrix AddEyeMat(int dim)
```

##### Arguments

**dim**: dimension of identity matrix.

##### Return

new identity matrix object.

#### 16.4.3.20 Model::AddGenConstrIndicator()

Add a general constraint of type indicator to model.

##### Synopsis

```
GenConstr AddGenConstrIndicator(const GenConstrBuilder &builder)
```

##### Arguments

**builder**: builder for the general constraint.

##### Return

new general constraint object of type indicator.

#### 16.4.3.21 **Model::AddGenConstrIndicator()**

Add a general constraint of type indicator to model.

##### **Synopsis**

```
GenConstr AddGenConstrIndicator(  
    Var binVar,  
    int binVal,  
    const ConstrBuilder &constr)
```

##### **Arguments**

**binVar**: binary indicator variable.

**binVal**: value for binary indicator variable that force a linear constraint to be satisfied(0 or 1).

**constr**: builder for linear constraint.

##### **Return**

new general constraint object of type indicator.

#### 16.4.3.22 **Model::AddGenConstrIndicator()**

Add a general constraint of type indicator to model.

##### **Synopsis**

```
GenConstr AddGenConstrIndicator(  
    Var binVar,  
    int binVal,  
    const Expr &expr,  
    char sense,  
    double rhs)
```

##### **Arguments**

**binVar**: binary indicator variable.

**binVal**: value for binary indicator variable that force a linear constraint to be satisfied(0 or 1).

**expr**: expression for new linear constraint.

**sense**: sense for new linear constraint.

**rhs**: right hand side value for new linear constraint.

##### **Return**

new general constraint object of type indicator.

#### 16.4.3.23 Model::AddOnesMat()

Add a dense symmetric matrix of value one to a model.

##### Synopsis

```
SymMatrix AddOnesMat(int dim)
```

##### Arguments

dim: dimension of dense symmetric matrix.

##### Return

new symmetric matrix object.

#### 16.4.3.24 Model::AddPsdConstr()

Add a PSD constraint to model.

##### Synopsis

```
PsdConstraint AddPsdConstr(  
    const PsdExpr &expr,  
    char sense,  
    double rhs,  
    const char *szName)
```

##### Arguments

expr: PSD expression for new PSD constraint.

sense: sense for new PSD constraint.

rhs: double value at right side of the new PSD constraint.

szName: optional, name of new PSD constraint.

##### Return

new PSD constraint object.

#### 16.4.3.25 Model::AddPsdConstr()

Add a PSD constraint to model.

##### Synopsis

```
PsdConstraint AddPsdConstr(  
    const PsdExpr &expr,  
    double lb,  
    double ub,  
    const char *szName)
```

##### Arguments

expr: expression for new PSD constraint.

lb: lower bound for ew PSD constraint.

ub: upper bound for new PSD constraint

szName: optional, name of new PSD constraint.

**Return**

new PSD constraint object.

**16.4.3.26 Model::AddPsdConstr()**

Add a PSD constraint to model.

**Synopsis**

```
PsdConstraint AddPsdConstr(  
    const PsdExpr &lhs,  
    char sense,  
    const PsdExpr &rhs,  
    const char *szName)
```

**Arguments**

**lhs**: PSD expression at left side of new PSD constraint.

**sense**: sense for new PSD constraint.

**rhs**: PSD expression at right side of new PSD constraint.

**szName**: optional, name of new PSD constraint.

**Return**

new PSD constraint object.

**16.4.3.27 Model::AddPsdConstr()**

Add a PSD constraint to a model.

**Synopsis**

```
PsdConstraint AddPsdConstr(const PsdConstrBuilder &builder, const  
    char *szName)
```

**Arguments**

**builder**: builder for new PSD constraint.

**szName**: optional, name of new PSD constraint.

**Return**

new PSD constraint object.

**16.4.3.28 Model::AddPsdVar()**

Add a new PSD variable to model.

**Synopsis**

```
PsdVar AddPsdVar(int dim, const char *szName)
```

**Arguments**

**dim**: dimension of new PSD variable.

**szName**: name of new PSD variable.

**Return**

PSD variable object.



#### 16.4.3.29 Model::AddPsdVars()

Add new PSD variables to model.

##### Synopsis

```
PsdVarArray AddPsdVars(  
    int count,  
    int *pDim,  
    const char *szPrefix)
```

##### Arguments

count: number of new PSD variables.  
pDim: array of dimensions of new PSD variables.  
szPrefix: name prefix of new PSD variables.

##### Return

array of PSD variable objects.

#### 16.4.3.30 Model::AddPsdVars()

Add new PSD variables to model.

##### Synopsis

```
PsdVarArray AddPsdVars(  
    int count,  
    int *pDim,  
    const char *szNames,  
    int len)
```

##### Arguments

count: number of new PSD variables.  
pDim: array of dimensions of new PSD variables.  
szNames: name buffer of new PSD variables.  
len: length of the name buffer.

##### Return

array of PSD variable objects.

#### 16.4.3.31 Model::AddQConstr()

Add a quadratic constraint to model.

##### Synopsis

```
QConstraint AddQConstr(  
    const QuadExpr &expr,  
    char sense,  
    double rhs,  
    const char *szName)
```

**Arguments**

**expr**: quadratic expression for the new constraint.  
**sense**: sense for new quadratic constraint.  
**rhs**: double value at right side of the new quadratic constraint.  
**szName**: optional, name of new quadratic constraint.

**Return**

new quadratic constraint object.

**16.4.3.32 Model::AddQConstr()**

Add a quadratic constraint to model.

**Synopsis**

```
QConstraint AddQConstr(  
    const QuadExpr &lhs,  
    char sense,  
    const QuadExpr &rhs,  
    const char *szName)
```

**Arguments**

**lhs**: quadratic expression at left side of the new quadratic constraint.  
**sense**: sense for new quadratic constraint.  
**rhs**: quadratic expression at right side of the new quadratic constraint.  
**szName**: optional, name of new quadratic constraint.

**Return**

new quadratic constraint object.

**16.4.3.33 Model::AddQConstr()**

Add a quadratic constraint to a model.

**Synopsis**

```
QConstraint AddQConstr(const QConstrBuilder &builder, const char  
    *szName)
```

**Arguments**

**builder**: builder for the new quadratic constraint.  
**szName**: optional, name of new quadratic constraint.

**Return**

new quadratic constraint object.

#### 16.4.3.34 Model::AddSos()

Add a SOS constraint to model.

##### Synopsis

```
Sos AddSos(const SosBuilder &builder)
```

##### Arguments

**builder:** builder for new SOS constraint.

##### Return

new SOS constraint object.

#### 16.4.3.35 Model::AddSos()

Add a SOS constraint to model.

##### Synopsis

```
Sos AddSos(  
    const VarArray &vars,  
    const double *pWeights,  
    int type)
```

##### Arguments

**vars:** variables that participate in the SOS constraint.

**pWeights:** optional, weights for variables in the SOS constraint.

**type:** type of SOS constraint.

##### Return

new SOS constraint object.

#### 16.4.3.36 Model::AddSparseMat()

Add a sparse symmetric matrix to a model.

##### Synopsis

```
SymMatrix AddSparseMat(  
    int dim,  
    int nElems,  
    int *pRows,  
    int *pCols,  
    double *pVals)
```

##### Arguments

**dim:** dimension of the sparse symmetric matrix.

**nElems:** number of non

**pRows:** array of row indexes of non

**pCols:** array of col indexes of non

**pVals:** array of values of non

**Return**

new symmetric matrix object.

**16.4.3.37 Model::AddSymMat()**

Given a symmetric matrix expression, add results matrix to model.

**Synopsis**

```
SymMatrix AddSymMat(const SymMatExpr &expr)
```

**Arguments**

expr: symmetric matrix expression object.

**Return**

results symmetric matrix object.

**16.4.3.38 Model::AddVar()**

Add a variable to model.

**Synopsis**

```
Var AddVar(  
    double lb,  
    double ub,  
    double obj,  
    char vtype,  
    const char *szName)
```

**Arguments**

lb: lower bound for new variable.

ub: upper bound for new variable.

obj: objective coefficient for new variable.

vtype: variable type for new variable.

szName: optional, name for new variable.

**Return**

new variable object.

**16.4.3.39 Model::AddVar()**

Add a variable and the associated non-zero coefficients as column.

**Synopsis**

```
Var AddVar(  
    double lb,  
    double ub,  
    double obj,  
    char vtype,
```

```
    const Column &col,  
    const char *szName)
```

**Arguments**

lb: lower bound for new variable.  
ub: upper bound for new variable.  
obj: objective coefficient for new variable.  
vtype: variable type for new variable.  
col: column object for specifying a set of constraints to which the variable belongs.  
szName: optional, name for new variable.

**Return**

new variable object.

**16.4.3.40 Model::AddVars()**

Add new variables to model.

**Synopsis**

```
VarArray AddVars(  
    int count,  
    char vtype,  
    const char *szPrefix)
```

**Arguments**

count: the number of variables to add.  
vtype: variable types for new variables.  
szPrefix: prefix part for names of new variables.

**Return**

array of new variable objects.

**16.4.3.41 Model::AddVars()**

Add new variables to model.

**Synopsis**

```
VarArray AddVars(  
    int count,  
    char vtype,  
    const char *szNames,  
    int len)
```

**Arguments**

count: the number of variables to add.  
vtype: variable types for new variables.  
szNames: name buffer for new variables.  
len: length of name buffer.

**Return**

array of new variable objects.

**16.4.3.42 Model::AddVars()**

Add new variables to model.

**Synopsis**

```
VarArray AddVars(  
    int count,  
    double lb,  
    double ub,  
    double obj,  
    char vtype,  
    const char *szPrefix)
```

**Arguments**

**count**: the number of variables to add.  
**lb**: lower bound for new variable.  
**ub**: upper bound for new variable.  
**obj**: objective coefficient for new variable.  
**vtype**: variable types for new variables.  
**szPrefix**: prefix part for names of new variables.

**Return**

array of new variable objects.

**16.4.3.43 Model::AddVars()**

Add new variables to model.

**Synopsis**

```
VarArray AddVars(  
    int count,  
    double lb,  
    double ub,  
    double obj,  
    char vtype,  
    const char *szNames,  
    int len)
```

**Arguments**

**count**: the number of variables to add.  
**lb**: lower bound for new variable.  
**ub**: upper bound for new variable.  
**obj**: objective coefficient for new variable.

vtype: variable types for new variables.

szNames: name buffer for new variables.

len: length of name buffer.

#### **Return**

array of new variable objects.

#### **16.4.3.44 Model::AddVars()**

Add new variables to model.

##### **Synopsis**

```
VarArray AddVars(  
    int count,  
    double *plb,  
    double *pub,  
    double *pobj,  
    char *pvtype,  
    const char *szPrefix)
```

##### **Arguments**

count: the number of variables to add.

plb: lower bounds for new variables. if NULL, lower bounds are 0.0.

pub: upper bounds for new variables. if NULL, upper bounds are infinity or 1 for binary variables.

pobj: objective coefficients for new variables. if NULL, objective coefficients are 0.0.

pvtype: variable types for new variables. if NULL, variable types are continuous.

szPrefix: prefix part for names of new variables.

#### **Return**

array of new variable objects.

#### **16.4.3.45 Model::AddVars()**

Add new decision variables to a model.

##### **Synopsis**

```
VarArray AddVars(  
    int count,  
    double *plb,  
    double *pub,  
    double *pobj,  
    char *pvtype,  
    const char *szNames,  
    int len)
```

**Arguments**

**count:** the number of variables to add.

**plb:** lower bounds for new variables. if NULL, lower bounds are 0.0.

**pub:** upper bounds for new variables. if NULL, upper bounds are infinity or 1 for binary variables.

**pobj:** objective coefficients for new variables. if NULL, objective coefficients are 0.0.

**pvtype:** variable types for new variables. if NULL, variable types are continuous.

**szNames:** name buffer for new variables.

**len:** length of name buffer.

**Return**

array of new variable objects.

**16.4.3.46 Model::AddVars()**

Add new variables to model.

**Synopsis**

```
VarArray AddVars(  
    int count,  
    double *plb,  
    double *pub,  
    double *pobj,  
    char *pvtype,  
    const ColumnArray &cols,  
    const char *szPrefix)
```

**Arguments**

**count:** the number of variables to add.

**plb:** lower bounds for new variables. if NULL, lower bounds are 0.0.

**pub:** upper bounds for new variables. if NULL, upper bounds are infinity or 1 for binary variables.

**pobj:** objective coefficients for new variables. if NULL, objective coefficients are 0.0.

**pvtype:** variable types for new variables. if NULL, variable types are continuous.

**cols:** column objects for specifying a set of constraints to which each new variable belongs.

**szPrefix:** prefix part for names of new variables.

**Return**

array of new variable objects.



**16.4.3.47 Model::Clear()**

Clear all settings including problem itself.

**Synopsis**

```
void Clear()
```

**16.4.3.48 Model::Clone()**

Deep copy a new model object.

**Synopsis**

```
Model Clone()
```

**Return**

cloned model object.

**16.4.3.49 Model::ComputeIIS()**

Compute IIS for infeasible model.

**Synopsis**

```
void ComputeIIS()
```

**16.4.3.50 Model::DelPsdObj()**

delete PSD part of objective in model.

**Synopsis**

```
void DelPsdObj()
```

**16.4.3.51 Model::DelQuadObj()**

delete quadratic part of objective in model.

**Synopsis**

```
void DelQuadObj()
```

**16.4.3.52 Model::FeasRelax()**

Compute feasibility relaxation for infeasible model.

**Synopsis**

```
void FeasRelax(  
    VarArray &vars,  
    double *pColLowPen,  
    double *pColUppPen,  
    ConstrArray &cons,  
    double *pRowBndPen,  
    double *pRowUppPen)
```

**Arguments**

`vars`: an array of variables.  
`pColLowPen`: penalties for lower bounds of variables.  
`pColUppPen`: penalties for upper bounds of variables.  
`cons`: an array of constraints.  
`pRowBndPen`: penalties for right hand sides of constraints.  
`pRowUppPen`: penalties for upper bounds of range constraints.

#### 16.4.3.53 **Model::FeasRelax()**

Compute feasibility relaxation for infeasible model.

##### Synopsis

```
void FeasRelax(int ifRelaxVars, int ifRelaxCons)
```

##### Arguments

`ifRelaxVars`: whether to relax variables.  
`ifRelaxCons`: whether to relax constraints.

#### 16.4.3.54 **Model::Get()**

Query values of double parameter or attribute, associated with variables.

##### Synopsis

```
int Get(  
    const char *szName,  
    const VarArray &vars,  
    double *pOut)
```

##### Arguments

`szName`: name of double parameter or double attribute.  
`vars`: a list of desired variables.  
`pOut`: output array of parameter or attribute values.

##### Return

the number of valid variables. If failed, return -1.

#### 16.4.3.55 **Model::Get()**

Query values of parameter or attribute, associated with constraints.

##### Synopsis

```
int Get(  
    const char *szName,  
    const ConstrArray &constrs,  
    double *pOut)
```

##### Arguments

**szName:** name of double parameter or double attribute.

**constrs:** a list of desired constraints.

**pOut:** output array of parameter or attribute values.

**Return**

the number of valid constraints. If failed, return -1.

**16.4.3.56 Model::Get()**

Query values of parameter or attribute, associated with quadratic constraints.

**Synopsis**

```
int Get(  
    const char *szName,  
    const QConstrArray &constrs,  
    double *pOut)
```

**Arguments**

**szName:** name of double parameter or double attribute.

**constrs:** a list of desired quadratic constraints.

**pOut:** output array of parameter or attribute values.

**Return**

the number of valid quadratic constraints. If failed, return -1.

**16.4.3.57 Model::Get()**

Query values of parameter or attribute, associated with PSD constraints.

**Synopsis**

```
int Get(  
    const char *szName,  
    const PsdConstrArray &constrs,  
    double *pOut)
```

**Arguments**

**szName:** name of double parameter or attribute.

**constrs:** a list of desired PSD constraints.

**pOut:** output array of parameter or attribute values.

**Return**

the number of valid PSD constraints. If failed, return -1.

#### 16.4.3.58 Model::GetCoeff()

Get the coefficient of variable in a linear constraint.

##### Synopsis

```
double GetCoeff(const Constraint &constr, const Var &var)
```

##### Arguments

**constr:** The requested constraint.

**var:** The requested variable.

##### Return

The requested coefficient.

#### 16.4.3.59 Model::GetCol()

Get a column object that have a list of constraints in which the variable participates.

##### Synopsis

```
Column GetCol(const Var &var)
```

##### Arguments

**var:** a variable object.

##### Return

a column object associated with a variable.

#### 16.4.3.60 Model::GetColBasis()

Get status of column basis.

##### Synopsis

```
int GetColBasis(int *pBasis)
```

##### Arguments

**pBasis:** integer pointer to basis status.

##### Return

number of columns.

#### 16.4.3.61 Model::GetCone()

Get a cone constraint of given index in model.

##### Synopsis

```
Cone GetCone(int idx)
```

##### Arguments

**idx:** index of the desired cone constraint.

##### Return

the desired cone constraint object.

**16.4.3.62 Model::GetConeBuilders()**

Get builders of all cone constraints in model.

**Synopsis**

```
ConeBuilderArray GetConeBuilders()
```

**Return**

array object of all cone constraint builders.

**16.4.3.63 Model::GetConeBuilders()**

Get builders of given cone constraints in model.

**Synopsis**

```
ConeBuilderArray GetConeBuilders(const ConeArray &cones)
```

**Arguments**

**cones:** array of cone constraints.

**Return**

array object of desired cone constraint builders.

**16.4.3.64 Model::GetCones()**

Get all cone constraints in model.

**Synopsis**

```
ConeArray GetCones()
```

**Return**

array object of cone constraints.

**16.4.3.65 Model::GetConstr()**

Get a constraint of given index in model.

**Synopsis**

```
Constraint GetConstr(int idx)
```

**Arguments**

**idx:** index of the desired constraint.

**Return**

the desired constraint object.

#### 16.4.3.66 **Model::GetConstrBuilder()**

Get builder of a constraint in model, including variables and associated coefficients, sense and RHS.

##### **Synopsis**

```
ConstrBuilder GetConstrBuilder(Constraint constr)
```

##### **Arguments**

`constr`: a constraint object.

##### **Return**

constraint builder object.

#### 16.4.3.67 **Model::GetConstrBuilders()**

Get builders of all constraints in model.

##### **Synopsis**

```
ConstrBuilderArray GetConstrBuilders()
```

##### **Return**

array object of constraint builders.

#### 16.4.3.68 **Model::GetConstrByName()**

Get a constraint of given name in model.

##### **Synopsis**

```
Constraint GetConstrByName(const char *szName)
```

##### **Arguments**

`szName`: name of the desired constraint.

##### **Return**

the desired constraint object.

#### 16.4.3.69 **Model::GetConstrLowerIIS()**

Get IIS status of lower bounds of constraints.

##### **Synopsis**

```
int GetConstrLowerIIS(const ConstrArray &constrs, int *pLowerIIS)
```

##### **Arguments**

`constrs`: Array of constraints.

`pLowerIIS`: IIS status of lower bounds of constraints.

##### **Return**

Number of constraints.

**16.4.3.70 Model::GetConstrs()**

Get all constraints in model.

**Synopsis**

```
ConstrArray GetConstrs()
```

**Return**

array object of constraints.

**16.4.3.71 Model::GetConstrUpperIIS()**

Get IIS status of upper bounds of constraints.

**Synopsis**

```
int GetConstrUpperIIS(const ConstrArray &constrs, int *pUpperIIS)
```

**Arguments**

**constrs:** Array of constraints.

**pUpperIIS:** IIS status of upper bounds of constraints.

**Return**

Number of constraints.

**16.4.3.72 Model::GetDblAttr()**

Get value of a COPT double attribute.

**Synopsis**

```
double GetDblAttr(const char *szAttr)
```

**Arguments**

**szAttr:** name of double attribute.

**Return**

value of double attribute.

**16.4.3.73 Model::GetDblParam()**

Get value of a COPT double parameter.

**Synopsis**

```
double GetDblParam(const char *szParam)
```

**Arguments**

**szParam:** name of integer parameter.

**Return**

value of double parameter.

#### 16.4.3.74 **Model::GetGenConstrIndicator()**

Get builder of given general constraint of type indicator.

##### **Synopsis**

```
GenConstrBuilder GetGenConstrIndicator(const GenConstr &indicator)
```

##### **Arguments**

indicator: a general constraint of type indicator.

##### **Return**

builder object of general constraint of type indicator.

#### 16.4.3.75 **Model::GetIndicatorIIS()**

Get IIS status of indicator constraints.

##### **Synopsis**

```
int GetIndicatorIIS(const GenConstrArray &genconstrs, int *pIIS)
```

##### **Arguments**

genconstrs: Array of indicator constraints.

pIIS: IIS status of indicator constraints.

##### **Return**

Number of indicator constraints.

#### 16.4.3.76 **Model::GetIntAttr()**

Get value of a COPT integer attribute.

##### **Synopsis**

```
int GetIntAttr(const char *szAttr)
```

##### **Arguments**

szAttr: name of integer attribute.

##### **Return**

value of integer attribute.

#### 16.4.3.77 **Model::GetIntParam()**

Get value of a COPT integer parameter.

##### **Synopsis**

```
int GetIntParam(const char *szParam)
```

##### **Arguments**

szParam: name of integer parameter.

##### **Return**

value of integer parameter.



#### 16.4.3.78 Model::GetLpSolution()

Get LP solution.

##### Synopsis

```
void GetLpSolution(  
    double *pValue,  
    double *pSlack,  
    double *pRowDual,  
    double *pRedCost)
```

##### Arguments

pValue: optional, double pointer to solution values.  
pSlack: optional, double pointer to slack values.  
pRowDual: optional, double pointer to dual values.  
pRedCost: optional, double pointer to reduced costs.

#### 16.4.3.79 Model::GetObjective()

Get linear expression of objective for model.

##### Synopsis

```
Expr GetObjective()
```

##### Return

a linear expression object.

#### 16.4.3.80 Model::GetParamAttrType()

Get type of a COPT parameter or attribute.

##### Synopsis

```
int GetParamAttrType(const char *szName)
```

##### Arguments

szName: name of parameter or attribute.

##### Return

type of parameter or attribute.

#### 16.4.3.81 Model::GetParamInfo()

Get current, default, minimum, maximum of COPT integer parameter.

##### Synopsis

```
void GetParamInfo(  
    const char *szParam,  
    int *pnCur,  
    int *pnDef,  
    int *pnMin,
```

```
int *pnMax)
```

**Arguments**

szParam: name of integer parameter.  
pnCur: out, current value of integer parameter.  
pnDef: out, default value of integer parameter.  
pnMin: out, minimum value of integer parameter.  
pnMax: out, maximum value of integer parameter.

**16.4.3.82 Model::GetParamInfo()**

Get current, default, minimum, maximum of COPT double parameter.

**Synopsis**

```
void GetParamInfo(  
    const char *szParam,  
    double *pdCur,  
    double *pdDef,  
    double *pdMin,  
    double *pdMax)
```

**Arguments**

szParam: name of double parameter.  
pdCur: out, current value of double parameter.  
pdDef: out, default value of double parameter.  
pdMin: out, minimum value of double parameter.  
pdMax: out, maximum value of double parameter.

**16.4.3.83 Model::GetPoolObjVal()**

Get the iSol-th objective value in solution pool.

**Synopsis**

```
double GetPoolObjVal(int iSol)
```

**Arguments**

iSol: Index of solution.

**Return**

The requested objective value.

**16.4.3.84 Model::GetPoolSolution()**

Get the iSol-th solution in solution pool.

**Synopsis**

```
int GetPoolSolution(  
    int iSol,  
    const VarArray &vars,  
    double *pColVals)
```

**Arguments**

iSol: Index of solution.

vars: The requested variables.

pColVals: Pointer to the requested solutions.

**Return**

The length of requested solution array.

**16.4.3.85 Model::GetPsdCoeff()**

Get the symmetric matrix of PSD variable in a PSD constraint.

**Synopsis**

```
SymMatrix GetPsdCoeff(const PsdConstraint &constr, const PsdVar  
    &var)
```

**Arguments**

constr: The desired PSD constraint.

var: The desired PSD variable.

**Return**

The associated coefficient matrix.

**16.4.3.86 Model::GetPsdConstr()**

Get a quadratic constraint of given index in model.

**Synopsis**

```
PsdConstraint GetPsdConstr(int idx)
```

**Arguments**

idx: index of the desired quadratic constraint.

**Return**

the desired quadratic constraint object.

**16.4.3.87 Model::GetPsdConstrBuilder()**

Get builder of a PSD constraint in model, including PSD variables, sense and associated symmetric matrix.

**Synopsis**

```
PsdConstrBuilder GetPsdConstrBuilder(const PsdConstraint &constr)
```

**Arguments**

constr: a PSD constraint object.

**Return**

PSD constraint builder object.

**16.4.3.88 Model::GetPsdConstrBuilders()**

Get builders of all PSD constraints in model.

**Synopsis**

```
PsdConstrBuilderArray GetPsdConstrBuilders()
```

**Return**

array object of PSD constraint builders.

**16.4.3.89 Model::GetPsdConstrByName()**

Get a quadratic constraint of given name in model.

**Synopsis**

```
PsdConstraint GetPsdConstrByName(const char *szName)
```

**Arguments**

szName: name of the desired constraint.

**Return**

the desired quadratic constraint object.

**16.4.3.90 Model::GetPsdConstrs()**

Get all PSD constraints in model.

**Synopsis**

```
PsdConstrArray GetPsdConstrs()
```

**Return**

array object of PSD constraints.

**16.4.3.91 Model::GetPsdObjective()**

Get PSD objective of model.

**Synopsis**

```
PsdExpr GetPsdObjective()
```

**Return**

a PSD expression object.

**16.4.3.92 Model::GetPsdRow()**

Get PSD variables and associated symmetric matrix that participate in a PSD constraint.

**Synopsis**

```
PsdExpr GetPsdRow(const PsdConstraint &constr)
```

**Arguments**

`constr`: a PSD constraint object.

**Return**

PSD expression object of the PSD constraint.

**16.4.3.93 Model::GetPsdRow()**

Get PSD variables, associated symmetric matrix, LB/UB that participate in a PSD constraint.

**Synopsis**

```
PsdExpr GetPsdRow(  
    const PsdConstraint &constr,  
    double *pLower,  
    double *pUpper)
```

**Arguments**

`constr`: a PSD constraint object.

`pLower`: pointer to double value of lower bound.

`pUpper`: pointer to double value of upper bound.

**Return**

PSD expression object of the PSD constraint.

**16.4.3.94 Model::GetPsdVar()**

Get a PSD variable of given index in model.

**Synopsis**

```
PsdVar GetPsdVar(int idx)
```

**Arguments**

`idx`: index of the desired PSD variable.

**Return**

the desired PSD variable object.

#### 16.4.3.95 **Model::GetPsdVarByName()**

Get a PSD variable of given name in model.

##### **Synopsis**

```
PsdVar GetPsdVarByName(const char *szName)
```

##### **Arguments**

`szName`: name of the desired PSD variable.

##### **Return**

the desired PSD variable object.

#### 16.4.3.96 **Model::GetPsdVars()**

Get all PSD variables in model.

##### **Synopsis**

```
PsdVarArray GetPsdVars()
```

##### **Return**

array object of PSD variables.

#### 16.4.3.97 **Model::GetQConstr()**

Get a quadratic constraint of given index in model.

##### **Synopsis**

```
QConstraint GetQConstr(int idx)
```

##### **Arguments**

`idx`: index of the desired quadratic constraint.

##### **Return**

the desired quadratic constraint object.

#### 16.4.3.98 **Model::GetQConstrBuilder()**

Get builder of a constraint in model, including variables and associated coefficients, sense and RHS.

##### **Synopsis**

```
QConstrBuilder GetQConstrBuilder(const QConstraint &constr)
```

##### **Arguments**

`constr`: a constraint object.

##### **Return**

constraint builder object.

**16.4.3.99 Model::GetQConstrBuilders()**

Get builders of all constraints in model.

**Synopsis**

```
QConstrBuilderArray GetQConstrBuilders()
```

**Return**

array object of constraint builders.

**16.4.3.100 Model::GetQConstrByName()**

Get a quadratic constraint of given name in model.

**Synopsis**

```
QConstraint GetQConstrByName(const char *szName)
```

**Arguments**

szName: name of the desired constraint.

**Return**

the desired quadratic constraint object.

**16.4.3.101 Model::GetQConstrs()**

Get all quadratic constraints in model.

**Synopsis**

```
QConstrArray GetQConstrs()
```

**Return**

array object of quadratic constraints.

**16.4.3.102 Model::GetQuadObjective()**

Get quadratic objective of model.

**Synopsis**

```
QuadExpr GetQuadObjective()
```

**Return**

a quadratic expression object.

**16.4.3.103 Model::GetQuadRow()**

Get two variables and associated coefficients that participate in a quadratic constraint.

**Synopsis**

```
QuadExpr GetQuadRow(const QConstraint &constr)
```

**Arguments**

constr: a quadratic constraint object.

**Return**

quadratic expression object of the constraint.

**16.4.3.104 Model::GetQuadRow()**

Get two variables and associated coefficients that participate in a quadratic constraint.

**Synopsis**

```
QuadExpr GetQuadRow(  
    const QConstraint &constr,  
    char *pSense,  
    double *pBound)
```

**Arguments**

constr: a quadratic constraint object.  
pSense: sense of quadratic constraint.  
pBound: right hand side of quadratic constraint.

**Return**

quadratic expression object of the constraint.

**16.4.3.105 Model::GetRow()**

Get variables that participate in a constraint, and the associated coefficients.

**Synopsis**

```
Expr GetRow(const Constraint &constr)
```

**Arguments**

constr: a constraint object.

**Return**

expression object of the constraint.

**16.4.3.106 Model::GetRowBasis()**

Get status of row basis.

**Synopsis**

```
int GetRowBasis(int *pBasis)
```

**Arguments**

pBasis: integer pointer to basis status.

**Return**

number of rows.



#### 16.4.3.107 Model::GetSolution()

Get MIP solution.

##### Synopsis

```
void GetSolution(double *pValue)
```

##### Arguments

pValue: double pointer to solution values.

#### 16.4.3.108 Model::GetSos()

Get a SOS constraint of given index in model.

##### Synopsis

```
Sos GetSos(int idx)
```

##### Arguments

idx: index of the desired SOS constraint.

##### Return

the desired SOS constraint object.

#### 16.4.3.109 Model::GetSosBuilders()

Get builders of all SOS constraints in model.

##### Synopsis

```
SosBuilderArray GetSosBuilders()
```

##### Return

array object of SOS constraint builders.

#### 16.4.3.110 Model::GetSosBuilders()

Get builders of given SOS constraints in model.

##### Synopsis

```
SosBuilderArray GetSosBuilders(const SosArray &ssoss)
```

##### Arguments

ssoss: array of SOS constraints.

##### Return

array object of desired SOS constraint builders.

**16.4.3.111 Model::GetSOSIIS()**

Get IIS status of SOS constraints.

**Synopsis**

```
int GetSOSIIS(const SosArray &ssoss, int *pIIS)
```

**Arguments**

ssoss: Array of SOS constraints.

pIIS: IIS status of SOS constraints.

**Return**

Number of SOS constraints.

**16.4.3.112 Model::GetSoss()**

Get all SOS constraints in model.

**Synopsis**

```
SosArray GetSoss()
```

**Return**

array object of SOS constraints.

**16.4.3.113 Model::GetSymMat()**

Get a symmetric matrix of given index in model.

**Synopsis**

```
SymMatrix GetSymMat(int idx)
```

**Arguments**

idx: index of the desired symmetric matrix.

**Return**

the desired symmetric matrix object.

**16.4.3.114 Model::GetVar()**

Get a variable of given index in model.

**Synopsis**

```
Var GetVar(int idx)
```

**Arguments**

idx: index of the desired variable.

**Return**

the desired variable object.

**16.4.3.115 Model::GetVarByName()**

Get a variable of given name in model.

**Synopsis**

```
Var GetVarByName(const char *szName)
```

**Arguments**

szName: name of the desired variable.

**Return**

the desired variable object.

**16.4.3.116 Model::GetVarLowerIIS()**

Get IIS status of lower bounds of variables.

**Synopsis**

```
int GetVarLowerIIS(const VarArray &vars, int *pLowerIIS)
```

**Arguments**

vars: Array of variables

pLowerIIS: IIS status of lower bounds of variables.

**Return**

Number of variables.

**16.4.3.117 Model::GetVars()**

Get all variables in model.

**Synopsis**

```
VarArray GetVars()
```

**Return**

variable array object.

**16.4.3.118 Model::GetVarUpperIIS()**

Get IIS status of upper bounds of variables.

**Synopsis**

```
int GetVarUpperIIS(const VarArray &vars, int *pUpperIIS)
```

**Arguments**

vars: Array of variables

pUpperIIS: IIS status of upper bounds of variables.

**Return**

Number of variables.

**16.4.3.119 Model::Interrupt()**

Interrupt optimization of current problem.

**Synopsis**

```
void Interrupt()
```

**16.4.3.120 Model::LoadMipStart()**

Load final initial values of variables to the problem.

**Synopsis**

```
void LoadMipStart()
```

**16.4.3.121 Model::LoadTuneParam()**

Load specified tuned parameters into model.

**Synopsis**

```
void LoadTuneParam(int idx)
```

**Arguments**

idx: Index of tuned parameters.

**16.4.3.122 Model::Read()**

Read problem, solution, basis, MIP start or COPT parameters from file.

**Synopsis**

```
void Read(const char *szFileName)
```

**Arguments**

szFileName: an input file name.

**16.4.3.123 Model::ReadBasis()**

Read basis from file.

**Synopsis**

```
void ReadBasis(const char *szFileName)
```

**Arguments**

szFileName: an input file name.

**16.4.3.124 Model::ReadBin()**

Read problem in COPT binary format from file.

**Synopsis**

```
void ReadBin(const char *szFileName)
```

**Arguments**

szFileName: an input file name.

**16.4.3.125 Model::ReadCbf()**

Read problem in CBF format from file.

**Synopsis**

```
void ReadCbf(const char *szFileName)
```

**Arguments**

szFileName: an input file name.

**16.4.3.126 Model::ReadLp()**

Read problem in LP format from file.

**Synopsis**

```
void ReadLp(const char *szFileName)
```

**Arguments**

szFileName: an input file name.

**16.4.3.127 Model::ReadMps()**

Read problem in MPS format from file.

**Synopsis**

```
void ReadMps(const char *szFileName)
```

**Arguments**

szFileName: an input file name.

**16.4.3.128 Model::ReadMst()**

Read MIP start information from file.

**Synopsis**

```
void ReadMst(const char *szFileName)
```

**Arguments**

szFileName: an input file name.

**16.4.3.129 Model::ReadParam()**

Read COPT parameters from file.

**Synopsis**

```
void ReadParam(const char *szFileName)
```

**Arguments**

szFileName: an input file name.

**16.4.3.130 Model::ReadSdpa()**

Read problem in SDPA format from file.

**Synopsis**

```
void ReadSdpa(const char *szFileName)
```

**Arguments**

szFileName: an input file name.

**16.4.3.131 Model::ReadSol()**

Read solution from file.

**Synopsis**

```
void ReadSol(const char *szFileName)
```

**Arguments**

szFileName: an input file name.

**16.4.3.132 Model::ReadTune()**

Read tuning parameters from file.

**Synopsis**

```
void ReadTune(const char *szFileName)
```

**Arguments**

szFileName: an input file name.

**16.4.3.133 Model::Remove()**

Remove a list of variables from model.

**Synopsis**

```
void Remove(VarArray &vars)
```

**Arguments**

vars: an array of variables.

**16.4.3.134 Model::Remove()**

Remove a list of constraints from model.

**Synopsis**

```
void Remove(ConstrArray &constrs)
```

**Arguments**

constrs: an array of constraints.

**16.4.3.135 Model::Remove()**

Remove a list of SOS constraints from model.

**Synopsis**

```
void Remove(SosArray &ssoss)
```

**Arguments**

**ssoss**: an array of SOS constraints.

**16.4.3.136 Model::Remove()**

Remove a list of gernal constraints from model.

**Synopsis**

```
void Remove(GenConstrArray &genConstrs)
```

**Arguments**

**genConstrs**: an array of general constraints.

**16.4.3.137 Model::Remove()**

Remove a list of Cone constraints from model.

**Synopsis**

```
void Remove(ConeArray &cones)
```

**Arguments**

**cones**: an array of Cone constraints.

**16.4.3.138 Model::Remove()**

Remove a list of quadratic constraints from model.

**Synopsis**

```
void Remove(QConstrArray &qconstrs)
```

**Arguments**

**qconstrs**: an array of quadratic constraints.

**16.4.3.139 Model::Remove()**

Remove a list of PSD variables from model.

**Synopsis**

```
void Remove(PsdVarArray &vars)
```

**Arguments**

**vars**: an array of PSD variables.

**16.4.3.140 Model::Remove()**

Remove a list of PSD constraints from model.

**Synopsis**

```
void Remove(PsdConstrArray &constrs)
```

**Arguments**

**constrs:** an array of PSD constraints.

**16.4.3.141 Model::Reset()**

Reset solution only.

**Synopsis**

```
void Reset()
```

**16.4.3.142 Model::ResetAll()**

Reset solution and additional information.

**Synopsis**

```
void ResetAll()
```

**16.4.3.143 Model::ResetParam()**

Reset parameters to default settings.

**Synopsis**

```
void ResetParam()
```

**16.4.3.144 Model::Set()**

Set values of double parameter, associated with variables.

**Synopsis**

```
void Set(  
    const char *szName,  
    const VarArray &vars,  
    double *pVals,  
    int len)
```

**Arguments**

**szName:** name of double parameter.

**vars:** a list of desired variables.

**pVals:** array of parameter values.

**len:** length of value array.



**16.4.3.145 Model::Set()**

Set values of parameter, associated with constraints.

**Synopsis**

```
void Set(  
    const char *szName,  
    const ConstrArray &constrs,  
    double *pVals,  
    int len)
```

**Arguments**

**szName:** name of double parameter.  
**constrs:** a list of desired constraints.  
**pVals:** array of parameter values.  
**len:** length of value array.

**16.4.3.146 Model::Set()**

Set values of parameter, associated with PSD constraints.

**Synopsis**

```
void Set(  
    const char *szName,  
    const PsdConstrArray &constrs,  
    double *pVals,  
    int len)
```

**Arguments**

**szName:** name of double parameter.  
**constrs:** a list of desired PSD constraints.  
**pVals:** array of values of parameter.  
**len:** length of value array.

**16.4.3.147 Model::SetBasis()**

Set column and row basis status to model.

**Synopsis**

```
void SetBasis(int *pColBasis, int *pRowBasis)
```

**Arguments**

**pColBasis:** pointer to status of column basis.  
**pRowBasis:** pointer to status of row basis.

**16.4.3.148 Model::SetCoeff()**

Set the coefficient of a variable in a linear constraint.

**Synopsis**

```
void SetCoeff(  
    const Constraint &constr,  
    const Var &var,  
    double newVal)
```

**Arguments**

constr: The requested constraint.

var: The requested variable.

newVal: New coefficient.

**16.4.3.149 Model::SetDbiParam()**

Set value of a COPT double parameter.

**Synopsis**

```
void SetDbiParam(const char *szParam, double dVal)
```

**Arguments**

szParam: name of integer parameter.

dVal: double value.

**16.4.3.150 Model::SetIntParam()**

Set value of a COPT integer parameter.

**Synopsis**

```
void SetIntParam(const char *szParam, int nVal)
```

**Arguments**

szParam: name of integer parameter.

nVal: integer value.

**16.4.3.151 Model::SetLpSolution()**

Set LP solution.

**Synopsis**

```
void SetLpSolution(  
    double *pValue,  
    double *pSlack,  
    double *pRowDual,  
    double *pRedCost)
```

**Arguments**

pValue: double pointer to solution values.  
pSlack: double pointer to slack values.  
pRowDual: double pointer to dual values.  
pRedCost: double pointer to reduced costs.

#### **16.4.3.152 Model::SetMipStart()**

Set initial values for variables of given number, starting from the first one.

##### **Synopsis**

```
void SetMipStart(int count, double *pVals)
```

##### **Arguments**

count: the number of variables to set.  
pVals: pointer to initial values of variables.

#### **16.4.3.153 Model::SetMipStart()**

Set initial value for the specified variable.

##### **Synopsis**

```
void SetMipStart(const Var &var, double val)
```

##### **Arguments**

var: an interested variable.  
val: initial value of the variable.

#### **16.4.3.154 Model::SetMipStart()**

Set initial values for an array of variables.

##### **Synopsis**

```
void SetMipStart(const VarArray &vars, double *pVals)
```

##### **Arguments**

vars: a list of interested variables.  
pVals: pointer to initial values of variables.

#### **16.4.3.155 Model::SetObjConst()**

Set objective constant.

##### **Synopsis**

```
void SetObjConst(double constant)
```

##### **Arguments**

constant: constant value to set.

**16.4.3.156 Model::SetObjective()**

Set objective for model.

**Synopsis**

```
void SetObjective(const Expr &expr, int sense)
```

**Arguments**

**expr:** expression of the objective.

**sense:** optional, default value 0 does not change COPT sense.

**16.4.3.157 Model::SetObjSense()**

Set objective sense for model.

**Synopsis**

```
void SetObjSense(int sense)
```

**Arguments**

**sense:** the objective sense.

**16.4.3.158 Model::SetPsdCoeff()**

Set the coefficient matrix of a PSD variable in a PSD constraint.

**Synopsis**

```
void SetPsdCoeff(  
    const PsdConstraint &constr,  
    const PsdVar &var,  
    const SymMatrix &mat)
```

**Arguments**

**constr:** The desired PSD constraint.

**var:** The desired PSD variable.

**mat:** new coefficient matrix.

**16.4.3.159 Model::SetPsdObjective()**

Set PSD objective for model.

**Synopsis**

```
void SetPsdObjective(const PsdExpr &expr, int sense)
```

**Arguments**

**expr:** PSD expression of the objective.

**sense:** optional, default value 0 does not change COPT sense.

**16.4.3.160 Model::SetQuadObjective()**

Set quadratic objective for model.

**Synopsis**

```
void SetQuadObjective(const QuadExpr &expr, int sense)
```

**Arguments**

**expr:** quadratic expression of the objective.

**sense:** optional, default value 0 does not change COPT sense.

**16.4.3.161 Model::SetSlackBasis()**

Set slack basis to model.

**Synopsis**

```
void SetSlackBasis()
```

**16.4.3.162 Model::SetSolverLogCallback()**

Set log callback for COPT.

**Synopsis**

```
void SetSolverLogCallback(ILogCallback *pcb)
```

**Arguments**

**pcb:** pointer to ILogCallback object.

**16.4.3.163 Model::SetSolverLogFile()**

Set log file for COPT.

**Synopsis**

```
void SetSolverLogFile(const char *szLogFile)
```

**Arguments**

**szLogFile:** log file name.

**16.4.3.164 Model::Solve()**

Solve the model as MIP.

**Synopsis**

```
void Solve()
```

**16.4.3.165 Model::SolveLp()**

Solve the model as LP.

**Synopsis**

```
void SolveLp()
```

**16.4.3.166 Model::Tune()**

Tune model.

**Synopsis**

```
void Tune()
```

**16.4.3.167 Model::Write()**

Output problem, solution, basis, MIP start or modified COPT parameters to file.

**Synopsis**

```
void Write(const char *szFileName)
```

**Arguments**

szFileName: an output file name.

**16.4.3.168 Model::WriteBasis()**

Output optimal basis to a file of type '.bas'.

**Synopsis**

```
void WriteBasis(const char *szFileName)
```

**Arguments**

szFileName: an output file name.

**16.4.3.169 Model::WriteBin()**

Output problem to a file as COPT binary format.

**Synopsis**

```
void WriteBin(const char *szFileName)
```

**Arguments**

szFileName: an output file name.

**16.4.3.170 Model::WriteIIS()**

Output IIS to file.

**Synopsis**

```
void WriteIIS(const char *szFileName)
```

**Arguments**

szFileName: Output file name.

**16.4.3.171 Model::WriteLp()**

Output problem to a file as LP format.

**Synopsis**

```
void WriteLp(const char *szFileName)
```

**Arguments**

szFileName: an output file name.

**16.4.3.172 Model::WriteMps()**

Output problem to a file as MPS format.

**Synopsis**

```
void WriteMps(const char *szFileName)
```

**Arguments**

szFileName: an output file name.

**16.4.3.173 Model::WriteMpsStr()**

Output problem to a buffer as MPS format.

**Synopsis**

```
ProbBuffer WriteMpsStr()
```

**Return**

output problem buffer.

**16.4.3.174 Model::WriteMst()**

Output MIP start information to a file of type 'mst'.

**Synopsis**

```
void WriteMst(const char *szFileName)
```

**Arguments**

szFileName: an output file name.

**16.4.3.175 Model::WriteParam()**

Output modified COPT parameters to a file of type 'par'.

**Synopsis**

```
void WriteParam(const char *szFileName)
```

**Arguments**

szFileName: an output file name.

#### 16.4.3.176 Model::WritePoolSol()

Output selected pool solution to a file of type '.sol'.

##### Synopsis

```
void WritePoolSol(int iSol, const char *szFileName)
```

##### Arguments

iSol: index of pool solution.

szFileName: an output file name.

#### 16.4.3.177 Model::WriteRelax()

Output feasibility relaxation problem to file.

##### Synopsis

```
void WriteRelax(const char *szFileName)
```

##### Arguments

szFileName: Output file name.

#### 16.4.3.178 Model::WriteSol()

Output solution to a file of type '.sol'.

##### Synopsis

```
void WriteSol(const char *szFileName)
```

##### Arguments

szFileName: an output file name.

#### 16.4.3.179 Model::WriteTuneParam()

Output specified tuned parameters to a file of type '.par'.

##### Synopsis

```
void WriteTuneParam(int idx, const char *szFileName)
```

##### Arguments

idx: Index of tuned parameters.

szFileName: Output file name.

### 16.4.4 Var

COPT variable object. Variables are always associated with a particular model. User creates a variable object by adding a variable to a model, rather than by using constructor of Var class.



#### **16.4.4.1 Var::Get()**

Get attribute value of the variable. Support “Value”, “RedCost”, “LB”, “UB”, and “Obj” attributes.

##### **Synopsis**

```
double Get(const char *szAttr)
```

##### **Arguments**

szAttr: attribute name.

##### **Return**

attribute value

#### **16.4.4.2 Var::GetIdx()**

Get index of the variable.

##### **Synopsis**

```
inline int GetIdx()
```

##### **Return**

variable index.

#### **16.4.4.3 Var::GetLowerIIS()**

Get IIS status for lower bound of the variable.

##### **Synopsis**

```
int GetLowerIIS()
```

##### **Return**

IIS status.

#### **16.4.4.4 Var::GetName()**

Get name of the variable.

##### **Synopsis**

```
const char *GetName()
```

##### **Return**

variable name.

#### **16.4.4.5 Var::GetType()**

Get type of the variable.

##### **Synopsis**

```
char GetType()
```

##### **Return**

variable type.

#### 16.4.4.6 Var::GetUpperIIS()

Get IIS status for upper bound of the variable.

##### Synopsis

```
int GetUpperIIS()
```

##### Return

IIS status.

#### 16.4.4.7 Var::Remove()

Remove variable from model.

##### Synopsis

```
void Remove()
```

#### 16.4.4.8 Var::Set()

Set attribute value of the variable. Support “LB”, “UB” and “Obj” attributes.

##### Synopsis

```
void Set(const char *szAttr, double value)
```

##### Arguments

szAttr: attribute name.

value: new value.

#### 16.4.4.9 Var::SetName()

Set name of the variable.

##### Synopsis

```
void SetName(const char *szName)
```

##### Arguments

szName: variable name.

#### 16.4.4.10 Var::SetType()

Set type of the variable.

##### Synopsis

```
void SetType(char type)
```

##### Arguments

type: variable type.

### 16.4.5 VarArray

COPT variable array object. To store and access a set of C++ *Var* objects, Cardinal Optimizer provides C++ VarArray class, which defines the following methods.

#### 16.4.5.1 VarArray::GetVar()

Get i-th variable object.

##### Synopsis

```
Var &GetVar(int i)
```

##### Arguments

i: index of the variable.

##### Return

variable object with index i.

#### 16.4.5.2 VarArray::PushBack()

Add a variable object to variable array.

##### Synopsis

```
void PushBack(const Var &var)
```

##### Arguments

var: a variable object.

#### 16.4.5.3 VarArray::Reserve()

Reserve capacity to contain at least n items.

##### Synopsis

```
void Reserve(int n)
```

##### Arguments

n: minimum capacity for variable object.

#### 16.4.5.4 VarArray::Size()

Get the number of variable objects.

##### Synopsis

```
int Size()
```

##### Return

number of variable objects.

### 16.4.6 Expr

COPT linear expression object. A linear expression consists of a constant term, a list of terms of variables and associated coefficients. Linear expressions are used to build constraints.

#### 16.4.6.1 Expr::Expr()

Constructor of a constant linear expression.

##### Synopsis

```
Expr(double constant)
```

##### Arguments

**constant:** constant value in expression object.

#### 16.4.6.2 Expr::Expr()

Constructor of a linear expression with one term.

##### Synopsis

```
Expr(const Var &var, double coeff)
```

##### Arguments

**var:** variable for the added term.

**coeff:** coefficient for the added term.

#### 16.4.6.3 Expr::AddConstant()

Add constant for the expression.

##### Synopsis

```
void AddConstant(double constant)
```

##### Arguments

**constant:** the value of the constant.

#### 16.4.6.4 Expr::AddExpr()

Add an expression to self.

##### Synopsis

```
void AddExpr(const Expr &expr, double mult)
```

##### Arguments

**expr:** expression to be added.

**mult:** optional, constant multiplier, default value is 1.0.

#### **16.4.6.5 Expr::AddTerm()**

Add a term to expression object.

##### **Synopsis**

```
void AddTerm(const Var &var, double coeff)
```

##### **Arguments**

**var**: a variable for new term.

**coeff**: coefficient for new term.

#### **16.4.6.6 Expr::AddTerms()**

Add terms to expression object.

##### **Synopsis**

```
int AddTerms(  
    const VarArray &vars,  
    double *pCoeff,  
    int len)
```

##### **Arguments**

**vars**: variables for added terms.

**pCoeff**: coefficient array for added terms.

**len**: length of coefficient array.

##### **Return**

number of added terms.

#### **16.4.6.7 Expr::Clone()**

Deep copy linear expression object.

##### **Synopsis**

```
Expr Clone()
```

##### **Return**

cloned expression object.

#### **16.4.6.8 Expr::Evaluate()**

evaluate linear expression after solving

##### **Synopsis**

```
double Evaluate()
```

##### **Return**

value of linear expression

#### 16.4.6.9 Expr::GetCoeff()

Get coefficient from the i-th term in expression.

##### Synopsis

```
double GetCoeff(int i)
```

##### Arguments

i: index of the term.

##### Return

coefficient of the i-th term in expression object.

#### 16.4.6.10 Expr::GetConstant()

Get constant in expression.

##### Synopsis

```
double GetConstant()
```

##### Return

constant in expression.

#### 16.4.6.11 Expr::GetVar()

Get variable from the i-th term in expression.

##### Synopsis

```
Var &GetVar(int i)
```

##### Arguments

i: index of the term.

##### Return

variable of the i-th term in expression object.

#### 16.4.6.12 Expr::operator\*=( )

Multiply a constant to self.

##### Synopsis

```
void operator*=(double c)
```

##### Arguments

c: constant multiplier.

**16.4.6.13 Expr::operator\*()**

Multiply constant and return new expression.

**Synopsis**

```
Expr operator*(double c)
```

**Arguments**

c: constant multiplier.

**Return**

result expression.

**16.4.6.14 Expr::operator\*()**

Multiply a variable and return new quadratic expression object.

**Synopsis**

```
QuadExpr operator*(const Var &var)
```

**Arguments**

var: variable object.

**Return**

result quadratic expression.

**16.4.6.15 Expr::operator\*()**

Multiply a linear expression and return new quadratic expression object.

**Synopsis**

```
QuadExpr operator*(const Expr &other)
```

**Arguments**

other: linear expression object.

**Return**

result quadratic expression.

**16.4.6.16 Expr::operator+=()**

Add an expression to self.

**Synopsis**

```
void operator+=(const Expr &expr)
```

**Arguments**

expr: expression to be added.

**16.4.6.17 Expr::operator+()**

Add expression and return new expression.

**Synopsis**

```
Expr operator+(const Expr &other)
```

**Arguments**

**other:** other expression to add.

**Return**

result expression.

**16.4.6.18 Expr::operator-=(())**

Subtract an expression from self.

**Synopsis**

```
void operator-=(const Expr &expr)
```

**Arguments**

**expr:** expression to be subtracted.

**16.4.6.19 Expr::operator-()**

Subtract expression and return new expression.

**Synopsis**

```
Expr operator-(const Expr &other)
```

**Arguments**

**other:** other expression to subtract.

**Return**

result expression.

**16.4.6.20 Expr::Remove()**

Remove i-th term from expression object.

**Synopsis**

```
void Remove(int i)
```

**Arguments**

**i:** index of the term to be removed.



**16.4.6.21 Expr::Remove()**

Remove the term associated with variable from expression.

**Synopsis**

```
void Remove(const Var &var)
```

**Arguments**

**var:** a variable whose term should be removed.

**16.4.6.22 Expr::Reserve()**

Reserve capacity to contain at least n items.

**Synopsis**

```
void Reserve(size_t n)
```

**Arguments**

**n:** minimum capacity for linear expression object.

**16.4.6.23 Expr::SetCoeff()**

Set coefficient for the i-th term in expression.

**Synopsis**

```
void SetCoeff(int i, double val)
```

**Arguments**

**i:** index of the term.

**val:** coefficient of the term.

**16.4.6.24 Expr::SetConstant()**

Set constant for the expression.

**Synopsis**

```
void SetConstant(double constant)
```

**Arguments**

**constant:** the value of the constant.

**16.4.6.25 Expr::Size()**

Get number of terms in expression.

**Synopsis**

```
size_t Size()
```

**Return**

number of terms.

### 16.4.7 Constraint

COPT constraint object. Constraints are always associated with a particular model. User creates a constraint object by adding a constraint to a model, rather than by using constructor of Constraint class.

#### 16.4.7.1 Constraint::Get()

Get attribute value of the constraint. Support “Dual”, “Slack”, “LB”, “UB” attributes.

##### Synopsis

```
double Get(const char *szAttr)
```

##### Arguments

szAttr: name of the attribute being queried.

##### Return

attribute value.

#### 16.4.7.2 Constraint::GetBasis()

Get basis status of this constraint.

##### Synopsis

```
int GetBasis()
```

##### Return

basis status.

#### 16.4.7.3 Constraint::GetIdx()

Get index of the constraint.

##### Synopsis

```
int GetIdx()
```

##### Return

the index of the constraint.

#### 16.4.7.4 Constraint::GetLowerIIS()

Get IIS status for lower bound of the constraint.

##### Synopsis

```
int GetLowerIIS()
```

##### Return

IIS status.

**16.4.7.5 Constraint::GetName()**

Get name of the constraint.

**Synopsis**

```
const char *GetName()
```

**Return**

the name of the constraint.

**16.4.7.6 Constraint::GetUpperIIS()**

Get IIS status for upper bound of the constraint.

**Synopsis**

```
int GetUpperIIS()
```

**Return**

IIS status.

**16.4.7.7 Constraint::Remove()**

Remove this constraint from model.

**Synopsis**

```
void Remove()
```

**16.4.7.8 Constraint::Set()**

Set attribute value of the constraint. Support “LB” and “UB” attributes.

**Synopsis**

```
void Set(const char *szAttr, double value)
```

**Arguments**

szAttr: name of the attribute.

value: new value.

**16.4.7.9 Constraint::SetName()**

Set name for the constraint.

**Synopsis**

```
void SetName(const char *szName)
```

**Arguments**

szName: the name to set.

## 16.4.8 ConstrArray

COPT constraint array object. To store and access a set of C++ *Constraint* objects, Cardinal Optimizer provides C++ ConstrArray class, which defines the following methods.

### 16.4.8.1 ConstrArray::GetConstr()

Get i-th constraint object.

#### Synopsis

```
Constraint &GetConstr(int i)
```

#### Arguments

i: index of the constraint.

#### Return

constraint object with index i.

### 16.4.8.2 ConstrArray::PushBack()

Add a constraint object to constraint array.

#### Synopsis

```
void PushBack(const Constraint &constr)
```

#### Arguments

constr: a constraint object.

### 16.4.8.3 ConstrArray::Reserve()

Reserve capacity to contain at least n items.

#### Synopsis

```
void Reserve(int n)
```

#### Arguments

n: minimum capacity for Constraint object.

### 16.4.8.4 ConstrArray::Size()

Get the number of constraint objects.

#### Synopsis

```
int Size()
```

#### Return

number of constraint objects.

### 16.4.9 ConstrBuilder

COPT constraint builder object. To help building a constraint, given a linear expression, constraint sense and right-hand side value, Cardinal Optimizer provides C++ ConstrBuilder class, which defines the following methods.

#### 16.4.9.1 ConstrBuilder::GetExpr()

Get expression associated with constraint.

**Synopsis**

```
const Expr &GetExpr()
```

**Return**

expression object.

#### 16.4.9.2 ConstrBuilder::GetRange()

Get range from lower bound to upper bound of range constraint.

**Synopsis**

```
double GetRange()
```

**Return**

length from lower bound to upper bound of the constraint.

#### 16.4.9.3 ConstrBuilder::GetSense()

Get sense associated with constraint.

**Synopsis**

```
char GetSense()
```

**Return**

constraint sense.

#### 16.4.9.4 ConstrBuilder::Set()

Set detail of a constraint to its builder object.

**Synopsis**

```
void Set(  
    const Expr &expr,  
    char sense,  
    double rhs)
```

**Arguments**

**expr:** expression object at one side of the constraint

**sense:** constraint sense other than COPT\_RANGE.

**rhs:** constant of right side of the constraint.

#### 16.4.9.5 ConstrBuilder::SetRange()

Set a range constraint to its builder.

##### Synopsis

```
void SetRange(const Expr &expr, double range)
```

##### Arguments

**expr**: expression object, whose constant is negative upper bound.

**range**: length from lower bound to upper bound of the constraint. Must greater than 0.

### 16.4.10 ConstrBuilderArray

COPT constraint builder array object. To store and access a set of C++ *ConstrBuilder* objects, Cardinal Optimizer provides C++ *ConstrBuilderArray* class, which defines the following methods.

#### 16.4.10.1 ConstrBuilderArray::GetBuilder()

Get i-th constraint builder object.

##### Synopsis

```
ConstrBuilder &GetBuilder(int i)
```

##### Arguments

**i**: index of the constraint builder.

##### Return

constraint builder object with index i.

#### 16.4.10.2 ConstrBuilderArray::PushBack()

Add a constraint builder object to constraint builder array.

##### Synopsis

```
void PushBack(const ConstrBuilder &builder)
```

##### Arguments

**builder**: a constraint builder object.

#### 16.4.10.3 ConstrBuilderArray::Reserve()

Reserve capacity to contain at least n items.

##### Synopsis

```
void Reserve(int n)
```

##### Arguments

**n**: minimum capacity for constraint builder object.

#### **16.4.10.4 ConstrBuilderArray::Size()**

Get the number of constraint builder objects.

##### **Synopsis**

```
int Size()
```

##### **Return**

number of constraint builder objects.

#### **16.4.11 Column**

COPT column object. A column consists of a list of constraints and associated coefficients. Columns are used to represent the set of constraints in which a variable participates, and the associated coefficients.

##### **16.4.11.1 Column::Column()**

Constructor of column.

##### **Synopsis**

```
Column()
```

##### **16.4.11.2 Column::AddColumn()**

Add a column to self.

##### **Synopsis**

```
void AddColumn(const Column &col, double mult)
```

##### **Arguments**

col: column object to be added.

mult: multiply constant.

##### **16.4.11.3 Column::AddTerm()**

Add a term to column object.

##### **Synopsis**

```
void AddTerm(const Constraint &constr, double coeff)
```

##### **Arguments**

constr: a constraint for new term.

coeff: coefficient for new term.

#### 16.4.11.4 Column::AddTerms()

Add terms to column object.

##### Synopsis

```
int AddTerms(  
    const ConstrArray &constrs,  
    double *pCoeff,  
    int len)
```

##### Arguments

constrs: constraints for added terms.

pCoeff: coefficients for added terms.

len: number of terms to be added.

##### Return

number of added terms.

#### 16.4.11.5 Column::Clear()

Clear all terms.

##### Synopsis

```
void Clear()
```

#### 16.4.11.6 Column::Clone()

Deep copy column object.

##### Synopsis

```
Column Clone()
```

##### Return

cloned column object.

#### 16.4.11.7 Column::GetCoeff()

Get coefficient from the i-th term in column object.

##### Synopsis

```
double GetCoeff(int i)
```

##### Arguments

i: index of the term.

##### Return

coefficient of the i-th term in column object.



**16.4.11.8 Column::GetConstr()**

Get constraint from the i-th term in column object.

**Synopsis**

```
Constraint GetConstr(int i)
```

**Arguments**

i: index of the term.

**Return**

constraint of the i-th term in column object.

**16.4.11.9 Column::Remove()**

Remove i-th term from column object.

**Synopsis**

```
void Remove(int i)
```

**Arguments**

i: index of the term to be removed.

**16.4.11.10 Column::Remove()**

Remove the term associated with constraint from column object.

**Synopsis**

```
bool Remove(const Constraint &constr)
```

**Arguments**

constr: a constraint whose term should be removed.

**Return**

true if constraint exists in column object.

**16.4.11.11 Column::Reserve()**

Reserve capacity to contain at least n items.

**Synopsis**

```
void Reserve(int n)
```

**Arguments**

n: minimum capacity for Column object.

#### 16.4.11.12 Column::Size()

Get number of terms in column object.

##### Synopsis

```
int Size()
```

##### Return

number of terms.

### 16.4.12 ColumnArray

COPT column array object. To store and access a set of C++ *Column* objects, Cardinal Optimizer provides C++ ColumnArray class, which defines the following methods.

#### 16.4.12.1 ColumnArray::Clear()

Clear all column objects.

##### Synopsis

```
void Clear()
```

#### 16.4.12.2 ColumnArray::GetColumn()

Get i-th column object.

##### Synopsis

```
Column &GetColumn(int i)
```

##### Arguments

i: index of the column.

##### Return

column object with index i.

#### 16.4.12.3 ColumnArray::PushBack()

Add a column object to column array.

##### Synopsis

```
void PushBack(const Column &col)
```

##### Arguments

col: a column object.

#### **16.4.12.4 ColumnArray::Reserve()**

Reserve capacity to contain at least n items.

##### **Synopsis**

```
void Reserve(int n)
```

##### **Arguments**

n: minimum capacity for linear expression object.

#### **16.4.12.5 ColumnArray::Size()**

Get the number of column objects.

##### **Synopsis**

```
int Size()
```

##### **Return**

number of column objects.

### **16.4.13 Sos**

COPT SOS constraint object. SOS constraints are always associated with a particular model. User creates an SOS constraint object by adding an SOS constraint to a model, rather than by using constructor of Sos class.

An SOS constraint can be type 1 or 2 (COPT\_SOS\_TYPE1 or COPT\_SOS\_TYPE2).

#### **16.4.13.1 Sos::GetIdx()**

Get the index of SOS constraint.

##### **Synopsis**

```
int GetIdx()
```

##### **Return**

index of SOS constraint.

#### **16.4.13.2 Sos::GetIIS()**

Get IIS status of the SOS constraint.

##### **Synopsis**

```
int GetIIS()
```

##### **Return**

IIS status.

#### 16.4.13.3 `Sos::Remove()`

Remove the SOS constraint from model.

##### Synopsis

```
void Remove()
```

#### 16.4.14 `SosArray`

COPT SOS constraint array object. To store and access a set of C++ *Sos* objects, Cardinal Optimizer provides C++ `SosArray` class, which defines the following methods.

##### 16.4.14.1 `SosArray::GetSos()`

Get i-th SOS constraint object.

##### Synopsis

```
Sos &GetSos(int i)
```

##### Arguments

i: index of the SOS constraint.

##### Return

SOS constraint object with index i.

##### 16.4.14.2 `SosArray::PushBack()`

Add a SOS constraint object to SOS constraint array.

##### Synopsis

```
void PushBack(const Sos &sos)
```

##### Arguments

sos: a SOS constraint object.

##### 16.4.14.3 `SosArray::Size()`

Get the number of SOS constraint objects.

##### Synopsis

```
int Size()
```

##### Return

number of SOS constraint objects.

### 16.4.15 SosBuilder

COPT SOS constraint builder object. To help building an SOS constraint, given the SOS type, a set of variables and associated weights, Cardinal Optimizer provides C++ SosBuilder class, which defines the following methods.

#### 16.4.15.1 SosBuilder::GetSize()

Get number of terms in SOS constraint.

**Synopsis**

```
int GetSize()
```

**Return**

number of terms.

#### 16.4.15.2 SosBuilder::GetType()

Get type of SOS constraint.

**Synopsis**

```
int GetType()
```

**Return**

type of SOS constraint.

#### 16.4.15.3 SosBuilder::GetVar()

Get variable from the i-th term in SOS constraint.

**Synopsis**

```
Var GetVar(int i)
```

**Arguments**

i: index of the term.

**Return**

variable of the i-th term in SOS constraint.

#### 16.4.15.4 SosBuilder::GetVars()

Get variables of all terms in SOS constraint.

**Synopsis**

```
VarArray GetVars()
```

**Return**

variable array object.

#### 16.4.15.5 `SosBuilder::GetWeight()`

Get weight from the i-th term in SOS constraint.

##### Synopsis

```
double GetWeight(int i)
```

##### Arguments

i: index of the term.

##### Return

weight of the i-th term in SOS constraint.

#### 16.4.15.6 `SosBuilder::GetWeights()`

Get weights of all terms in SOS constraint.

##### Synopsis

```
double GetWeights()
```

##### Return

pointer to array of weights.

#### 16.4.15.7 `SosBuilder::Set()`

Set variables and weights of SOS constraint.

##### Synopsis

```
void Set(  
    const VarArray &vars,  
    const double *pWeights,  
    int type)
```

##### Arguments

vars: variable array object.

pWeights: pointer to array of weights.

type: type of SOS constraint.

#### 16.4.16 `SosBuilderArray`

COPT SOS constraint builder array object. To store and access a set of C++ *SosBuilder* objects, Cardinal Optimizer provides C++ `SosBuilderArray` class, which defines the following methods.

#### **16.4.16.1 SosBuilderArray::GetBuilder()**

Get i-th SOS constraint builder object.

##### **Synopsis**

```
SosBuilder &GetBuilder(int i)
```

##### **Arguments**

i: index of the SOS constraint builder.

##### **Return**

SOS constraint builder object with index i.

#### **16.4.16.2 SosBuilderArray::PushBack()**

Add a SOS constraint builder object to SOS constraint builder array.

##### **Synopsis**

```
void PushBack(const SosBuilder &builder)
```

##### **Arguments**

builder: a SOS constraint builder object.

#### **16.4.16.3 SosBuilderArray::Size()**

Get the number of SOS constraint builder objects.

##### **Synopsis**

```
int Size()
```

##### **Return**

number of SOS constraint builder objects.

### **16.4.17 GenConstr**

COPT general constraint object. General constraints are always associated with a particular model. User creates a general constraint object by adding a general constraint to a model, rather than by using constructor of GenConstr class.

#### **16.4.17.1 GenConstr::GetIdx()**

Get the index of the general constraint.

##### **Synopsis**

```
int GetIdx()
```

##### **Return**

index of the general constraint.

#### 16.4.17.2 `GenConstr::GetIIS()`

Get IIS status of the general constraint.

##### Synopsis

```
int GetIIS()
```

##### Return

IIS status.

#### 16.4.17.3 `GenConstr::Remove()`

Remove the general constraint from model.

##### Synopsis

```
void Remove()
```

### 16.4.18 `GenConstrArray`

COPT general constraint array object. To store and access a set of C++ *GenConstr* objects, Cardinal Optimizer provides C++ `GenConstrArray` class, which defines the following methods.

#### 16.4.18.1 `GenConstrArray::GetGenConstr()`

Get i-th general constraint object.

##### Synopsis

```
GenConstr &GetGenConstr(int i)
```

##### Arguments

i: index of the general constraint.

##### Return

general constraint object with index i.

#### 16.4.18.2 `GenConstrArray::PushBack()`

Add a general constraint object to general constraint array.

##### Synopsis

```
void PushBack(const GenConstr &constr)
```

##### Arguments

constr: a general constraint object.



#### **16.4.18.3 GenConstrArray::Size()**

Get the number of general constraint objects.

##### **Synopsis**

```
int Size()
```

##### **Return**

number of general constraint objects.

### **16.4.19 GenConstrBuilder**

COPT general constraint builder object. To help building a general constraint, given a binary variable and associated value, a linear expression and constraint sense, Cardinal Optimizer provides C++ GenConstrBuilder class, which defines the following methods.

#### **16.4.19.1 GenConstrBuilder::GetBinVal()**

Get binary value associated with general constraint.

##### **Synopsis**

```
int GetBinVal()
```

##### **Return**

binary value.

#### **16.4.19.2 GenConstrBuilder::GetBinVar()**

Get binary variable associated with general constraint.

##### **Synopsis**

```
Var GetBinVar()
```

##### **Return**

binary variable object.

#### **16.4.19.3 GenConstrBuilder::GetExpr()**

Get expression associated with general constraint.

##### **Synopsis**

```
const Expr &GetExpr()
```

##### **Return**

expression object.

#### 16.4.19.4 GenConstrBuilder::GetSense()

Get sense associated with general constraint.

##### Synopsis

```
char GetSense()
```

##### Return

constraint sense.

#### 16.4.19.5 GenConstrBuilder::Set()

Set binary variable, binary value, expression and sense of general constraint.

##### Synopsis

```
void Set(  
    Var var,  
    int val,  
    const Expr &expr,  
    char sense)
```

##### Arguments

**var**: binary variable.

**val**: binary value.

**expr**: expression object.

**sense**: general constraint sense.

#### 16.4.20 GenConstrBuilderArray

COPT general constraint builder array object. To store and access a set of C++ *GenConstrBuilder* objects, Cardinal Optimizer provides C++ *GenConstrBuilderArray* class, which defines the following methods.

##### 16.4.20.1 GenConstrBuilderArray::GetBuilder()

Get i-th general constraint builder object.

##### Synopsis

```
GenConstrBuilder &GetBuilder(int i)
```

##### Arguments

**i**: index of the general constraint builder.

##### Return

general constraint builder object with index i.

#### **16.4.20.2 GenConstrBuilderArray::PushBack()**

Add a general constraint builder object to general constraint builder array.

##### **Synopsis**

```
void PushBack(const GenConstrBuilder &builder)
```

##### **Arguments**

**builder:** a general constraint builder object.

#### **16.4.20.3 GenConstrBuilderArray::Size()**

Get the number of general constraint builder objects.

##### **Synopsis**

```
int Size()
```

##### **Return**

number of general constraint builder objects.

### **16.4.21 Cone**

COPT cone constraint object. Cone constraints are always associated with a particular model. User creates a cone constraint object by adding a cone constraint to a model, rather than by using constructor of Cone class.

A cone constraint can be regular or rotated (COPT\_CONE\_QUAD or COPT\_CONE\_RQUAD).

#### **16.4.21.1 Cone::GetIdx()**

Get the index of a cone constraint.

##### **Synopsis**

```
int GetIdx()
```

##### **Return**

index of a cone constraint.

#### **16.4.21.2 Cone::Remove()**

Remove the cone constraint from model.

##### **Synopsis**

```
void Remove()
```

### 16.4.22 ConeArray

COPT cone constraint array object. To store and access a set of C++ *Cone* objects, Cardinal Optimizer provides C++ ConeArray class, which defines the following methods.

#### 16.4.22.1 ConeArray::GetCone()

Get i-th cone constraint object.

##### Synopsis

```
Cone &GetCone(int i)
```

##### Arguments

i: index of the cone constraint.

##### Return

cone constraint object with index i.

#### 16.4.22.2 ConeArray::PushBack()

Add a cone constraint object to cone constraint array.

##### Synopsis

```
void PushBack(const Cone &cone)
```

##### Arguments

cone: a cone constraint object.

#### 16.4.22.3 ConeArray::Size()

Get the number of cone constraint objects.

##### Synopsis

```
int Size()
```

##### Return

number of cone constraint objects.

### 16.4.23 ConeBuilder

COPT cone constraint builder object. To help building a cone constraint, given the cone type and a set of variables, Cardinal Optimizer provides C++ ConeBuilder class, which defines the following methods.

#### 16.4.23.1 ConeBuilder::GetSize()

Get number of vars in a cone constraint.

##### Synopsis

```
int GetSize()
```

##### Return

number of vars.

#### 16.4.23.2 ConeBuilder::GetType()

Get type of a cone constraint.

##### Synopsis

```
int GetType()
```

##### Return

type of a cone constraint.

#### 16.4.23.3 ConeBuilder::GetVar()

Get the i-th variable in a cone constraint.

##### Synopsis

```
Var GetVar(int i)
```

##### Arguments

i: index of vars in a cone constraint.

##### Return

the i-th variable in a cone constraint.

#### 16.4.23.4 ConeBuilder::GetVars()

Get all variables in a cone constraint.

##### Synopsis

```
VarArray GetVars()
```

##### Return

variable array object.

#### 16.4.23.5 ConeBuilder::Set()

Set variables of a cone constraint.

##### Synopsis

```
void Set(const VarArray &vars, int type)
```

##### Arguments

vars: variable array object.

type: type of cone constraint.

### 16.4.24 ConeBuilderArray

COPT cone constraint builder array object. To store and access a set of C++ *ConeBuilder* objects, Cardinal Optimizer provides C++ *ConeBuilderArray* class, which defines the following methods.

#### 16.4.24.1 ConeBuilderArray::GetBuilder()

Get i-th cone constraint builder object.

##### Synopsis

```
ConeBuilder &GetBuilder(int i)
```

##### Arguments

i: index of the cone constraint builder.

##### Return

cone constraint builder object with index i.

#### 16.4.24.2 ConeBuilderArray::PushBack()

Add a cone constraint builder object to cone constraint builder array.

##### Synopsis

```
void PushBack(const ConeBuilder &builder)
```

##### Arguments

builder: a cone constraint builder object.

#### 16.4.24.3 ConeBuilderArray::Size()

Get the number of cone constraint builder objects.

##### Synopsis

```
int Size()
```

##### Return

number of cone constraint builder objects.

### 16.4.25 QuadExpr

COPT quadratic expression object. A quadratic expression consists of a linear expression, a list of variable pairs and associated coefficients of quadratic terms. Quadratic expressions are used to build quadratic constraints and objectives.

#### 16.4.25.1 QuadExpr::QuadExpr()

Constructor of a quadratic expression with a constant.

##### Synopsis

```
QuadExpr(double constant)
```

##### Arguments

constant: constant value in quadratic expression object.

#### 16.4.25.2 QuadExpr::QuadExpr()

Constructor of a quadratic expression with one term.

##### Synopsis

```
QuadExpr(const Var &var, double coeff)
```

##### Arguments

**var**: variable for the added term.

**coeff**: coefficient for the added term.

#### 16.4.25.3 QuadExpr::QuadExpr()

Constructor of a quadratic expression with a linear expression.

##### Synopsis

```
QuadExpr(const Expr &expr)
```

##### Arguments

**expr**: input linear expression.

#### 16.4.25.4 QuadExpr::QuadExpr()

Constructor of a quadratic expression with two linear expression.

##### Synopsis

```
QuadExpr(const Expr &expr, const Var &var)
```

##### Arguments

**expr**: one linear expression.

**var**: another variable.

#### 16.4.25.5 QuadExpr::QuadExpr()

Constructor of a quadratic expression with two linear expression.

##### Synopsis

```
QuadExpr(const Expr &left, const Expr &right)
```

##### Arguments

**left**: one linear expression.

**right**: another linear expression.

#### 16.4.25.6 QuadExpr::AddConstant()

Add constant for the expression.

##### Synopsis

```
void AddConstant(double constant)
```

##### Arguments

**constant**: the value of the constant.

#### 16.4.25.7 QuadExpr::AddLinExpr()

Add a linear expression to self.

##### Synopsis

```
void AddLinExpr(const Expr &expr, double mult)
```

##### Arguments

**expr**: linear expression to be added.

**mult**: optional, constant multiplier, default value is 1.0.

#### 16.4.25.8 QuadExpr::AddQuadExpr()

Add a quadratic expression to self.

##### Synopsis

```
void AddQuadExpr(const QuadExpr &expr, double mult)
```

##### Arguments

**expr**: quadratic expression to be added.

**mult**: optional, constant multiplier, default value is 1.0.

#### 16.4.25.9 QuadExpr::AddTerm()

Add a linear term to expression object.

##### Synopsis

```
void AddTerm(const Var &var, double coeff)
```

##### Arguments

**var**: variable of new linear term.

**coeff**: coefficient of new linear term.

#### 16.4.25.10 QuadExpr::AddTerm()

Add a quadratic term to expression object.

##### Synopsis

```
void AddTerm(  
    const Var &var1,  
    const Var &var2,  
    double coeff)
```

##### Arguments

**var1**: first variable of new quadratic term.

**var2**: second variable of new quadratic term.

**coeff**: coefficient of new quadratic term.



#### 16.4.25.11 QuadExpr::AddTerms()

Add linear terms to expression object.

##### Synopsis

```
int AddTerms(  
    const VarArray &vars,  
    double *pCoeff,  
    int len)
```

##### Arguments

**vars**: variables for added linear terms.

**pCoeff**: coefficient array for added linear terms.

**len**: length of coefficient array.

##### Return

number of added linear terms.

#### 16.4.25.12 QuadExpr::AddTerms()

Add quadratic terms to expression object.

##### Synopsis

```
int AddTerms(  
    const VarArray &vars1,  
    const VarArray &vars2,  
    double *pCoeff,  
    int len)
```

##### Arguments

**vars1**: first set of variables for added quadratic terms.

**vars2**: second set of variables for added quadratic terms.

**pCoeff**: coefficient array for added quadratic terms.

**len**: length of coefficient array.

##### Return

number of added quadratic terms.

#### 16.4.25.13 QuadExpr::Clone()

Deep copy quadratic expression object.

##### Synopsis

```
QuadExpr Clone()
```

##### Return

cloned quadratic expression object.

**16.4.25.14 QuadExpr::Evaluate()**

evaluate quadratic expression after solving

**Synopsis**

```
double Evaluate()
```

**Return**

value of quadratic expression

**16.4.25.15 QuadExpr::GetCoeff()**

Get coefficient from the i-th term in quadratic expression.

**Synopsis**

```
double GetCoeff(int i)
```

**Arguments**

i: index of the quadratic term.

**Return**

coefficient of the i-th quadratic term in quadratic expression object.

**16.4.25.16 QuadExpr::GetConstant()**

Get constant in quadratic expression.

**Synopsis**

```
double GetConstant()
```

**Return**

constant in quadratic expression.

**16.4.25.17 QuadExpr::GetLinExpr()**

Get linear expression in quadratic expression.

**Synopsis**

```
Expr &GetLinExpr()
```

**Return**

linear expression object.

**16.4.25.18 QuadExpr::GetVar1()**

Get the first variable from the i-th term in quadratic expression.

**Synopsis**

```
Var &GetVar1(int i)
```

**Arguments**

i: index of the term.

**Return**

the first variable of the i-th term in quadratic expression object.

**16.4.25.19 QuadExpr::GetVar2()**

Get the second variable from the i-th term in quadratic expression.

**Synopsis**

```
Var &GetVar2(int i)
```

**Arguments**

i: index of the term.

**Return**

the second variable of the i-th term in quadratic expression object.

**16.4.25.20 QuadExpr::operator\*=(())**

Multiply a constant to self.

**Synopsis**

```
void operator*=(double c)
```

**Arguments**

c: constant multiplier.

**16.4.25.21 QuadExpr::operator\*()**

Multiply constant and return new expression.

**Synopsis**

```
QuadExpr operator*(double c)
```

**Arguments**

c: constant multiplier.

**Return**

result expression.

**16.4.25.22 QuadExpr::operator+=(())**

Add an expression to self.

**Synopsis**

```
void operator+=(const QuadExpr &expr)
```

**Arguments**

expr: expression to be added.

**16.4.25.23 QuadExpr::operator+()**

Add expression and return new expression.

**Synopsis**

```
QuadExpr operator+(const QuadExpr &other)
```

**Arguments**

**other:** other expression to add.

**Return**

result expression.

**16.4.25.24 QuadExpr::operator-=(())**

Subtract an expression from self.

**Synopsis**

```
void operator-=(const QuadExpr &expr)
```

**Arguments**

**expr:** expression to be subtracted.

**16.4.25.25 QuadExpr::operator-()**

Subtract expression and return new expression.

**Synopsis**

```
QuadExpr operator-(const QuadExpr &other)
```

**Arguments**

**other:** other expression to subtract.

**Return**

result expression.

**16.4.25.26 QuadExpr::Remove()**

Remove i-th term from expression object.

**Synopsis**

```
void Remove(int i)
```

**Arguments**

**i:** index of the term to be removed.

**16.4.25.27 QuadExpr::Remove()**

Remove the term associated with variable from expression.

**Synopsis**

```
void Remove(const Var &var)
```

**Arguments**

**var**: a variable whose term should be removed.

**16.4.25.28 QuadExpr::Reserve()**

Reserve capacity to contain at least n items.

**Synopsis**

```
void Reserve(size_t n)
```

**Arguments**

**n**: minimum capacity for quadratic expression object.

**16.4.25.29 QuadExpr::SetCoeff()**

Set coefficient of the i-th term in quadratic expression.

**Synopsis**

```
void SetCoeff(int i, double val)
```

**Arguments**

**i**: index of the quadratic term.

**val**: coefficient of the term.

**16.4.25.30 QuadExpr::SetConstant()**

Set constant for the expression.

**Synopsis**

```
void SetConstant(double constant)
```

**Arguments**

**constant**: the value of the constant.

**16.4.25.31 QuadExpr::Size()**

Get number of terms in expression.

**Synopsis**

```
size_t Size()
```

**Return**

number of terms.

### 16.4.26 QConstraint

COPT quadratic constraint object. Quadratic constraints are always associated with a particular model. User creates a quadratic constraint object by adding a quadratic constraint to a model, rather than by using constructor of QConstraint class.

#### 16.4.26.1 QConstraint::Get()

Get attribute value of the quadratic constraint. Support related quadratic attributes.

##### Synopsis

```
double Get(const char *szAttr)
```

##### Arguments

szAttr: name of the attribute being queried.

##### Return

attribute value.

#### 16.4.26.2 QConstraint::GetIdx()

Get index of the quadratic constraint.

##### Synopsis

```
int GetIdx()
```

##### Return

the index of the quadratic constraint.

#### 16.4.26.3 QConstraint::GetName()

Get name of the quadratic constraint.

##### Synopsis

```
const char *GetName()
```

##### Return

the name of the quadratic constraint.

#### 16.4.26.4 QConstraint::GetRhs()

Get rhs of quadratic constraint.

##### Synopsis

```
double GetRhs()
```

##### Return

rhs of quadratic constraint.

**16.4.26.5 QConstraint::GetSense()**

Get sense of quadratic constraint.

**Synopsis**

```
char GetSense()
```

**Return**

sense of quadratic constraint.

**16.4.26.6 QConstraint::Remove()**

Remove this quadratic constraint from model.

**Synopsis**

```
void Remove()
```

**16.4.26.7 QConstraint::Set()**

Set attribute value of the quadratic constraint. Support related quadratic attributes.

**Synopsis**

```
void Set(const char *szAttr, double value)
```

**Arguments**

szAttr: name of the attribute.

value: new value.

**16.4.26.8 QConstraint::SetName()**

Set name of a quadratic constraint.

**Synopsis**

```
void SetName(const char *szName)
```

**Arguments**

szName: the name to set.

**16.4.26.9 QConstraint::SetRhs()**

Set rhs of quadratic constraint.

**Synopsis**

```
void SetRhs(double rhs)
```

**Arguments**

rhs: rhs of quadratic constraint.

#### 16.4.26.10 QConstraint::SetSense()

Set sense of quadratic constraint.

##### Synopsis

```
void SetSense(char sense)
```

##### Arguments

**sense:** sense of quadratic constraint.

#### 16.4.27 QConstrArray

COPT quadratic constraint array object. To store and access a set of C++ *QConstraint* objects, Cardinal Optimizer provides C++ QConstrArray class, which defines the following methods.

##### 16.4.27.1 QConstrArray::GetQConstr()

Get i-th quadratic constraint object.

##### Synopsis

```
QConstraint &GetQConstr(int idx)
```

##### Arguments

**idx:** index of the quadratic constraint.

##### Return

quadratic constraint object with index i.

##### 16.4.27.2 QConstrArray::PushBack()

Add a quadratic constraint object to constraint array.

##### Synopsis

```
void PushBack(const QConstraint &constr)
```

##### Arguments

**constr:** a quadratic constraint object.

##### 16.4.27.3 QConstrArray::Reserve()

Reserve capacity to contain at least n items.

##### Synopsis

```
void Reserve(int n)
```

##### Arguments

**n:** minimum capacity for quadratic constraint objects.



#### **16.4.27.4 QConstrArray::Size()**

Get the number of quadratic constraint objects.

##### **Synopsis**

```
int Size()
```

##### **Return**

number of quadratic constraint objects.

#### **16.4.28 QConstrBuilder**

COPT quadratic constraint builder object. To help building a quadratic constraint, given a quadratic expression, constraint sense and right-hand side value, Cardinal Optimizer provides C++ QConstrBuilder class, which defines the following methods.

##### **16.4.28.1 QConstrBuilder::GetQuadExpr()**

Get expression associated with quadratic constraint.

##### **Synopsis**

```
const QuadExpr &GetQuadExpr()
```

##### **Return**

quadratic expression object.

##### **16.4.28.2 QConstrBuilder::GetSense()**

Get sense associated with quadratic constraint.

##### **Synopsis**

```
char GetSense()
```

##### **Return**

quadratic constraint sense.

##### **16.4.28.3 QConstrBuilder::Set()**

Set detail of a quadratic constraint to its builder object.

##### **Synopsis**

```
void Set(  
    const QuadExpr &expr,  
    char sense,  
    double rhs)
```

##### **Arguments**

**expr:** expression object at one side of the quadratic constraint.

**sense:** quadratic constraint sense.

**rhs:** quadratic constant of right side of the constraint.

### 16.4.29 QConstrBuilderArray

COPT quadratic constraint builder array object. To store and access a set of C++ *QConstrBuilder* objects, Cardinal Optimizer provides C++ *QConstrBuilderArray* class, which defines the following methods.

#### 16.4.29.1 QConstrBuilderArray::GetBuilder()

Get i-th quadratic constraint builder object.

##### Synopsis

```
QConstrBuilder &GetBuilder(int idx)
```

##### Arguments

idx: index of the quadratic constraint builder.

##### Return

quadratic constraint builder object with index i.

#### 16.4.29.2 QConstrBuilderArray::PushBack()

Add a quadratic constraint builder object to quadratic constraint builder array.

##### Synopsis

```
void PushBack(const QConstrBuilder &builder)
```

##### Arguments

builder: a quadratic constraint builder object.

#### 16.4.29.3 QConstrBuilderArray::Reserve()

Reserve capacity to contain at least n items.

##### Synopsis

```
void Reserve(int n)
```

##### Arguments

n: minimum capacity for quadratic constraint builder object.

#### 16.4.29.4 QConstrBuilderArray::Size()

Get the number of quadratic constraint builder objects.

##### Synopsis

```
int Size()
```

##### Return

number of quadratic constraint builder objects.

### 16.4.30 PsdVar

COPT PSD variable object. PSD variables are always associated with a particular model. User creates a PSD variable object by adding a PSD variable to model, rather than by constructor of PsdVar class.

#### 16.4.30.1 PsdVar::Get()

Get attribute values of PSD variable.

##### Synopsis

```
double Get(const char *szAttr, int sz)
```

##### Arguments

szAttr: attribute name.

sz: length of the output array.

##### Return

output array of attribute values.

#### 16.4.30.2 PsdVar::GetDim()

Get dimension of PSD variable.

##### Synopsis

```
int GetDim()
```

##### Return

dimension of PSD variable.

#### 16.4.30.3 PsdVar::GetIdx()

Get index of PSD variable.

##### Synopsis

```
int GetIdx()
```

##### Return

index of PSD variable.

#### 16.4.30.4 PsdVar::GetLen()

Get length of PSD variable.

##### Synopsis

```
int GetLen()
```

##### Return

length of PSD variable.

#### 16.4.30.5 `PsdVar::GetName()`

Get name of PSD variable.

##### Synopsis

```
const char *GetName()
```

##### Return

name of PSD variable.

#### 16.4.30.6 `PsdVar::Remove()`

Remove PSD variable from model.

##### Synopsis

```
void Remove()
```

#### 16.4.30.7 `PsdVar::SetName()`

Set name of PSD variable.

##### Synopsis

```
void SetName(const char *szName)
```

##### Arguments

`szName`: name of PSD variable.

### 16.4.31 `PsdVarArray`

COPT PSD variable array object. To store and access a set of *PsdVar* objects, Cardinal Optimizer provides `PsdVarArray` class, which defines the following methods.

#### 16.4.31.1 `PsdVarArray::GetPsdVar()`

Get `idx`-th PSD variable object.

##### Synopsis

```
PsdVar &GetPsdVar(int idx)
```

##### Arguments

`idx`: index of the PSD variable.

##### Return

PSD variable object with index `idx`.

#### **16.4.31.2 PsdVarArray::PushBack()**

Add a PSD variable object to PSD variable array.

##### **Synopsis**

```
void PushBack(const PsdVar &var)
```

##### **Arguments**

**var:** a PSD variable object.

#### **16.4.31.3 PsdVarArray::Reserve()**

Reserve capacity to contain at least n items.

##### **Synopsis**

```
void Reserve(int n)
```

##### **Arguments**

**n:** minimum capacity for PSD variable object.

#### **16.4.31.4 PsdVarArray::Size()**

Get the number of PSD variable objects.

##### **Synopsis**

```
int Size()
```

##### **Return**

number of PSD variable objects.

### **16.4.32 PsdExpr**

COPT PSD expression object. A PSD expression consists of a linear expression, a list of PSD variables and associated coefficient matrices of PSD terms. PSD expressions are used to build PSD constraints and objectives.

#### **16.4.32.1 PsdExpr::PsdExpr()**

Constructor of a PSD expression with a constant.

##### **Synopsis**

```
PsdExpr(double constant)
```

##### **Arguments**

**constant:** constant value in PSD expression object.

#### 16.4.32.2 `PsdExpr::PsdExpr()`

Constructor of a PSD expression with one term.

##### Synopsis

```
PsdExpr(const Var &var, double coeff)
```

##### Arguments

`var`: variable for the added term.

`coeff`: coefficient for the added term.

#### 16.4.32.3 `PsdExpr::PsdExpr()`

Constructor of a PSD expression with a linear expression.

##### Synopsis

```
PsdExpr(const Expr &expr)
```

##### Arguments

`expr`: input linear expression.

#### 16.4.32.4 `PsdExpr::PsdExpr()`

Constructor of a PSD expression with one term.

##### Synopsis

```
PsdExpr(const PsdVar &var, const SymMatrix &mat)
```

##### Arguments

`var`: PSD variable for the added term.

`mat`: coefficient matrix for the added term.

#### 16.4.32.5 `PsdExpr::PsdExpr()`

Constructor of a PSD expression with one term.

##### Synopsis

```
PsdExpr(const PsdVar &var, const SymMatExpr &expr)
```

##### Arguments

`var`: PSD variable for the added term.

`expr`: coefficient expression of symmetric matrices for the added term.

#### 16.4.32.6 `PsdExpr::AddConstant()`

Add constant to the PSD expression.

##### Synopsis

```
void AddConstant(double constant)
```

##### Arguments

`constant`: value to be added.

**16.4.32.7 PsdExpr::AddLinExpr()**

Add a linear expression to self.

**Synopsis**

```
void AddLinExpr(const Expr &expr, double mult)
```

**Arguments**

**expr:** linear expression to be added.

**mult:** optional, constant multiplier, default value is 1.0.

**16.4.32.8 PsdExpr::AddPsdExpr()**

Add a PSD expression to self.

**Synopsis**

```
void AddPsdExpr(const PsdExpr &expr, double mult)
```

**Arguments**

**expr:** PSD expression to be added.

**mult:** optional, constant multiplier, default value is 1.0.

**16.4.32.9 PsdExpr::AddTerm()**

Add a linear term to PSD expression object.

**Synopsis**

```
void AddTerm(const Var &var, double coeff)
```

**Arguments**

**var:** variable of new linear term.

**coeff:** coefficient of new linear term.

**16.4.32.10 PsdExpr::AddTerm()**

Add a PSD term to PSD expression object.

**Synopsis**

```
void AddTerm(const PsdVar &var, const SymMatrix &mat)
```

**Arguments**

**var:** PSD variable of new PSD term.

**mat:** coefficient matrix of new PSD term.

#### 16.4.32.11 PsdExpr::AddTerm()

Add a PSD term to PSD expression object.

##### Synopsis

```
void AddTerm(const PsdVar &var, const SymMatExpr &expr)
```

##### Arguments

**var**: PSD variable of new PSD term.

**expr**: coefficient expression of symmetric matrices of new PSD term.

#### 16.4.32.12 PsdExpr::AddTerms()

Add linear terms to PSD expression object.

##### Synopsis

```
int AddTerms(  
    const VarArray &vars,  
    double *pCoeff,  
    int len)
```

##### Arguments

**vars**: variables for added linear terms.

**pCoeff**: coefficient array for added linear terms.

**len**: length of coefficient array.

##### Return

number of added linear terms.

#### 16.4.32.13 PsdExpr::AddTerms()

Add PSD terms to PSD expression object.

##### Synopsis

```
int AddTerms(const PsdVarArray &vars, const SymMatrixArray &mats)
```

##### Arguments

**vars**: PSD variables for added PSD terms.

**mats**: coefficient matrixes for added PSD terms.

##### Return

number of added PSD terms.



**16.4.32.14 PsdExpr::Clone()**

Deep copy PSD expression object.

**Synopsis**

```
PsdExpr Clone()
```

**Return**

cloned PSD expression object.

**16.4.32.15 PsdExpr::Evaluate()**

evaluate PSD expression after solving

**Synopsis**

```
double Evaluate()
```

**Return**

value of PSD expression

**16.4.32.16 PsdExpr::GetCoeff()**

Get coefficient from the i-th term in PSD expression.

**Synopsis**

```
SymMatExpr &GetCoeff(int i)
```

**Arguments**

i: index of the PSD term.

**Return**

coefficient of the i-th PSD term in PSD expression object.

**16.4.32.17 PsdExpr::GetConstant()**

Get constant in PSD expression.

**Synopsis**

```
double GetConstant()
```

**Return**

constant in PSD expression.

**16.4.32.18 PsdExpr::GetLinExpr()**

Get linear expression in PSD expression.

**Synopsis**

```
Expr &GetLinExpr()
```

**Return**

linear expression object.

**16.4.32.19 PsdExpr::GetPsdVar()**

Get the PSD variable from the i-th term in PSD expression.

**Synopsis**

```
PsdVar &GetPsdVar(int i)
```

**Arguments**

i: index of the term.

**Return**

the first variable of the i-th term in PSD expression object.

**16.4.32.20 PsdExpr::operator\*=( )**

Multiply a constant to self.

**Synopsis**

```
void operator*=(double c)
```

**Arguments**

c: constant multiplier.

**16.4.32.21 PsdExpr::operator\*( )**

Multiply constant and return new expression.

**Synopsis**

```
PsdExpr operator*(double c)
```

**Arguments**

c: constant multiplier.

**Return**

result expression.

**16.4.32.22 PsdExpr::operator+=( )**

Add an expression to self.

**Synopsis**

```
void operator+=(const PsdExpr &expr)
```

**Arguments**

expr: expression to be added.

**16.4.32.23 PsdExpr::operator+()**

Add expression and return new expression.

**Synopsis**

```
PsdExpr operator+(const PsdExpr &other)
```

**Arguments**

**other:** other expression to add.

**Return**

result expression.

**16.4.32.24 PsdExpr::operator-=(())**

Subtract an expression from self.

**Synopsis**

```
void operator-=(const PsdExpr &expr)
```

**Arguments**

**expr:** expression to be subtracted.

**16.4.32.25 PsdExpr::operator-()**

Subtract expression and return new expression.

**Synopsis**

```
PsdExpr operator-(const PsdExpr &other)
```

**Arguments**

**other:** other expression to subtract.

**Return**

result expression.

**16.4.32.26 PsdExpr::Remove()**

Remove i-th term from PSD expression object.

**Synopsis**

```
void Remove(int idx)
```

**Arguments**

**idx:** index of the term to be removed.

**16.4.32.27 PsdExpr::Remove()**

Remove the term associated with variable from PSD expression.

**Synopsis**

```
void Remove(const Var &var)
```

**Arguments**

**var:** a variable whose term should be removed.

**16.4.32.28 PsdExpr::Remove()**

Remove the term associated with PSD variable from PSD expression.

**Synopsis**

```
void Remove(const PsdVar &var)
```

**Arguments**

**var:** a PSD variable whose term should be removed.

**16.4.32.29 PsdExpr::Reserve()**

Reserve capacity to contain at least n items.

**Synopsis**

```
void Reserve(size_t n)
```

**Arguments**

**n:** minimum capacity for PSD expression object.

**16.4.32.30 PsdExpr::SetCoeff()**

Set coefficient matrix of the i-th term in PSD expression.

**Synopsis**

```
void SetCoeff(int i, const SymMatrix &mat)
```

**Arguments**

**i:** index of the PSD term.

**mat:** coefficient matrix of the term.

**16.4.32.31 PsdExpr::SetConstant()**

Set constant for the PSD expression.

**Synopsis**

```
void SetConstant(double constant)
```

**Arguments**

**constant:** the value of the constant.

#### **16.4.32.32 PsdExpr::Size()**

Get number of PSD terms in expression.

##### **Synopsis**

```
size_t Size()
```

##### **Return**

number of PSD terms.

#### **16.4.33 PsdConstraint**

COPT PSD constraint object. PSD constraints are always associated with a particular model. User creates a PSD constraint object by adding a PSD constraint to model, rather than by constructor of PsdConstraint class.

##### **16.4.33.1 PsdConstraint::Get()**

Get attribute value of the PSD constraint. Support related PSd attributes.

##### **Synopsis**

```
double Get(const char *szAttr)
```

##### **Arguments**

szAttr: name of queried attribute.

##### **Return**

attribute value.

##### **16.4.33.2 PsdConstraint::GetIdx()**

Get index of the PSD constraint.

##### **Synopsis**

```
int GetIdx()
```

##### **Return**

the index of the PSD constraint.

##### **16.4.33.3 PsdConstraint::GetName()**

Get name of the PSD constraint.

##### **Synopsis**

```
const char *GetName()
```

##### **Return**

the name of the PSD constraint.

#### 16.4.33.4 `PsdConstraint::Remove()`

Remove this PSD constraint from model.

##### Synopsis

```
void Remove()
```

#### 16.4.33.5 `PsdConstraint::Set()`

Set attribute value of the PSD constraint. Support related PSD attributes.

##### Synopsis

```
void Set(const char *szAttr, double value)
```

##### Arguments

`szAttr`: name of queried attribute.

`value`: new value.

#### 16.4.33.6 `PsdConstraint::SetName()`

Set name of a PSD constraint.

##### Synopsis

```
void SetName(const char *szName)
```

##### Arguments

`szName`: the name to set.

### 16.4.34 `PsdConstrArray`

COPT PSD constraint array object. To store and access a set of *PsdConstraint* objects, Cardinal Optimizer provides `PsdConstrArray` class, which defines the following methods.

#### 16.4.34.1 `PsdConstrArray::GetPsdConstr()`

Get idx-th PSD constraint object.

##### Synopsis

```
PsdConstraint &GetPsdConstr(int idx)
```

##### Arguments

`idx`: index of the PSD constraint.

##### Return

PSD constraint object with index `idx`.

#### **16.4.34.2 PsdConstrArray::PushBack()**

Add a PSD constraint object to PSD constraint array.

##### **Synopsis**

```
void PushBack(const PsdConstraint &constr)
```

##### **Arguments**

constr: a PSD constraint object.

#### **16.4.34.3 PsdConstrArray::Reserve()**

Reserve capacity to contain at least n items.

##### **Synopsis**

```
void Reserve(int n)
```

##### **Arguments**

n: minimum capacity for PSD constraint objects.

#### **16.4.34.4 PsdConstrArray::Size()**

Get the number of PSD constraint objects.

##### **Synopsis**

```
int Size()
```

##### **Return**

number of PSD constraint objects.

### **16.4.35 PsdConstrBuilder**

COPT PSD constraint builder object. To help building a PSD constraint, given a PSD expression, constraint sense and right-hand side value, Cardinal Optimizer provides PsdConstrBuilder class, which defines the following methods.

#### **16.4.35.1 PsdConstrBuilder::GetPsdExpr()**

Get expression associated with PSD constraint.

##### **Synopsis**

```
const PsdExpr &GetPsdExpr()
```

##### **Return**

PSD expression object.

#### 16.4.35.2 PsdConstrBuilder::GetRange()

Get range from lower bound to upper bound of range constraint.

##### Synopsis

```
double GetRange()
```

##### Return

length from lower bound to upper bound of the constraint.

#### 16.4.35.3 PsdConstrBuilder::GetSense()

Get sense associated with PSD constraint.

##### Synopsis

```
char GetSense()
```

##### Return

PSD constraint sense.

#### 16.4.35.4 PsdConstrBuilder::Set()

Set detail of a PSD constraint to its builder object.

##### Synopsis

```
void Set(  
    const PsdExpr &expr,  
    char sense,  
    double rhs)
```

##### Arguments

**expr**: expression object at one side of the PSD constraint.

**sense**: PSD constraint sense, other than COPT\_RANGE.

**rhs**: constant at right side of the PSD constraint.

#### 16.4.35.5 PsdConstrBuilder::SetRange()

Set a range constraint to its builder.

##### Synopsis

```
void SetRange(const PsdExpr &expr, double range)
```

##### Arguments

**expr**: PSD expression object, whose constant is negative upper bound.

**range**: length from lower bound to upper bound of the constraint. Must greater than 0.



### 16.4.36 PsdConstrBuilderArray

COPT PSD constraint builder array object. To store and access a set of *PsdConstrBuilder* objects, Cardinal Optimizer provides PsdConstrBuilderArray class, which defines the following methods.

#### 16.4.36.1 PsdConstrBuilderArray::GetBuilder()

Get idx-th PSD constraint builder object.

##### Synopsis

```
PsdConstrBuilder &GetBuilder(int idx)
```

##### Arguments

idx: index of the PSD constraint builder.

##### Return

PSD constraint builder object with index idx.

#### 16.4.36.2 PsdConstrBuilderArray::PushBack()

Add a PSD constraint builder object to PSD constraint builder array.

##### Synopsis

```
void PushBack(const PsdConstrBuilder &builder)
```

##### Arguments

builder: a PSD constraint builder object.

#### 16.4.36.3 PsdConstrBuilderArray::Reserve()

Reserve capacity to contain at least n items.

##### Synopsis

```
void Reserve(int n)
```

##### Arguments

n: minimum capacity for PSD constraint builder object.

#### 16.4.36.4 PsdConstrBuilderArray::Size()

Get the number of PSD constraint builder objects.

##### Synopsis

```
int Size()
```

##### Return

number of PSD constraint builder objects.

### 16.4.37 SymMatrix

COPT symmetric matrix object. Symmetric matrices are always associated with a particular model. User creates a symmetric matrix object by adding a symmetric matrix to model, rather than by constructor of SymMatrix class.

Symmetric matrices are used as coefficient matrices of PSD terms in PSD expressions, PSD constraints or PSD objectives.

#### 16.4.37.1 SymMatrix::GetDim()

Get the dimension of a symmetric matrix.

##### Synopsis

```
int GetDim()
```

##### Return

dimension of a symmetric matrix.

#### 16.4.37.2 SymMatrix::GetIdx()

Get the index of a symmetric matrix.

##### Synopsis

```
int GetIdx()
```

##### Return

index of a symmetric matrix.

### 16.4.38 SymMatrixArray

COPT symmetric matrix object. To store and access a set of *SymMatrix* objects, Cardinal Optimizer provides SymMatrixArray class, which defines the following methods.

#### 16.4.38.1 SymMatrixArray::GetMatrix()

Get i-th SymMatrix object.

##### Synopsis

```
SymMatrix &GetMatrix(int idx)
```

##### Arguments

idx: index of the SymMatrix object.

##### Return

SymMatrix object with index idx.

#### 16.4.38.2 SymMatrixArray::PushBack()

Add a SymMatrix object to SymMatrix array.

##### Synopsis

```
void PushBack(const SymMatrix &mat)
```

##### Arguments

mat: a SymMatrix object.

#### 16.4.38.3 SymMatrixArray::Reserve()

Reserve capacity to contain at least n items.

##### Synopsis

```
void Reserve(int n)
```

##### Arguments

n: minimum capacity for symmetric matrix object.

#### 16.4.38.4 SymMatrixArray::Size()

Get the number of SymMatrix objects.

##### Synopsis

```
int Size()
```

##### Return

number of SymMatrix objects.

### 16.4.39 SymMatExpr

COPT symmetric matrix expression object. A symmetric matrix expression is a linear combination of symmetric matrices, which is still a symmetric matrix. However, by doing so, we are able to delay computing the final matrix until setting PSD constraints or PSD objective.

#### 16.4.39.1 SymMatExpr::SymMatExpr()

Constructor of a symmetric matrix expression.

##### Synopsis

```
SymMatExpr()
```

#### 16.4.39.2 SymMatExpr::SymMatExpr()

Constructor of a symmetric matrix expression with one term.

##### Synopsis

```
SymMatExpr(const SymMatrix &mat, double coeff)
```

##### Arguments

mat: symmetric matrix of the added term.

coeff: optional, coefficient for the added term. Its default value is 1.0.

#### 16.4.39.3 SymMatExpr::AddSymMatExpr()

Add a symmetric matrix expression to self.

##### Synopsis

```
void AddSymMatExpr(const SymMatExpr &expr, double mult)
```

##### Arguments

**expr**: symmetric matrix expression to be added.

**mult**: optional, constant multiplier, default value is 1.0.

#### 16.4.39.4 SymMatExpr::AddTerm()

Add a term to symmetric matrix expression object.

##### Synopsis

```
bool AddTerm(const SymMatrix &mat, double coeff)
```

##### Arguments

**mat**: symmetric matrix of the new term.

**coeff**: coefficient of the new term.

##### Return

True if the term is added successfully.

#### 16.4.39.5 SymMatExpr::AddTerms()

Add multiple terms to expression object.

##### Synopsis

```
int AddTerms(  
    const SymMatrixArray &mats,  
    double *pCoeff,  
    int len)
```

##### Arguments

**mats**: symmetric matrix array object for added terms.

**pCoeff**: coefficient array for added terms.

**len**: length of coefficient array.

##### Return

Number of added terms. If negative, fail to add one of terms.

**16.4.39.6 SymMatExpr::Clone()**

Deep copy symmetric matrix expression object.

**Synopsis**

```
SymMatExpr Clone()
```

**Return**

cloned expression object.

**16.4.39.7 SymMatExpr::GetCoeff()**

Get coefficient of the i-th term in expression object.

**Synopsis**

```
double GetCoeff(int i)
```

**Arguments**

i: index of the term.

**Return**

coefficient of the i-th term.

**16.4.39.8 SymMatExpr::GetDim()**

Get dimension of symmetric matrix in expression.

**Synopsis**

```
int GetDim()
```

**Return**

dimension of symmetric matrix.

**16.4.39.9 SymMatExpr::GetSymMat()**

Get symmetric matrix of the i-th term in expression object.

**Synopsis**

```
SymMatrix &GetSymMat(int i)
```

**Arguments**

i: index of the term.

**Return**

the symmetric matrix of the i-th term.

**16.4.39.10 SymMatExpr::operator\*=( )**

Multiply a constant to self.

**Synopsis**

```
void operator*=(double c)
```

**Arguments**

c: constant multiplier.

**16.4.39.11 SymMatExpr::operator\*( )**

Multiply constant and return new expression.

**Synopsis**

```
SymMatExpr operator*(double c)
```

**Arguments**

c: constant multiplier.

**Return**

result expression.

**16.4.39.12 SymMatExpr::operator+=( )**

Add a symmetric matrix expression to self.

**Synopsis**

```
void operator+=(const SymMatExpr &expr)
```

**Arguments**

expr: symmetric matrix expression to be added.

**16.4.39.13 SymMatExpr::operator+( )**

Add expression and return new expression.

**Synopsis**

```
SymMatExpr operator+(const SymMatExpr &other)
```

**Arguments**

other: other expression to add.

**Return**

result expression.

**16.4.39.14 SymMatExpr::operator-=( )**

Subtract a symmetric matrix expression from self.

**Synopsis**

```
void operator-=(const SymMatExpr &expr)
```

**Arguments**

**expr**: symmetric matrix to be subtracted.

**16.4.39.15 SymMatExpr::operator-( )**

Subtract expression and return new expression.

**Synopsis**

```
SymMatExpr operator-(const SymMatExpr &other)
```

**Arguments**

**other**: other expression to subtract.

**Return**

result expression.

**16.4.39.16 SymMatExpr::Remove( )**

Remove i-th term from expression object.

**Synopsis**

```
void Remove(int idx)
```

**Arguments**

**idx**: index of the term to be removed.

**16.4.39.17 SymMatExpr::Remove( )**

Remove the term associated with the symmetric matrix.

**Synopsis**

```
void Remove(const SymMatrix &mat)
```

**Arguments**

**mat**: a symmetric matrix whose term should be removed.

**16.4.39.18 SymMatExpr::Reserve( )**

Reserve capacity to contain at least n items.

**Synopsis**

```
void Reserve(size_t n)
```

**Arguments**

**n**: minimum capacity for expression object.

#### 16.4.39.19 SymMatExpr::SetCoeff()

Set coefficient for the i-th term in expression object.

##### Synopsis

```
void SetCoeff(int i, double val)
```

##### Arguments

i: index of the term.

val: coefficient of the term.

#### 16.4.39.20 SymMatExpr::Size()

Get number of terms in expression.

##### Synopsis

```
size_t Size()
```

##### Return

number of terms.

### 16.4.40 ProbBuffer

Buffer object for COPT problem. ProbBuffer object holds the (MPS) problem in string format.

#### 16.4.40.1 ProbBuffer::ProbBuffer()

Constructor of ProbBuffer object.

##### Synopsis

```
ProbBuffer(int sz)
```

##### Arguments

sz: initial size of the problem buffer.

#### 16.4.40.2 ProbBuffer::GetData()

Get string of problem in problem buffer.

##### Synopsis

```
char *GetData()
```

##### Return

string of problem in problem buffer.



#### 16.4.40.3 ProbBuffer::Resize()

Resize buffer to given size, and zero-ended

##### Synopsis

```
void Resize(int sz)
```

##### Arguments

**sz**: new buffer size.

#### 16.4.40.4 ProbBuffer::Size()

Get the size of problem buffer.

##### Synopsis

```
int Size()
```

##### Return

size of problem buffer.

# Chapter 17

## C# API Reference

The **Cardinal Optimizer** provides C# API library. This chapter documents all COPT C# constants and API functions for C# applications.

### 17.1 Constants

There are four types of constants defined in **Cardinal Optimizer**. They are general constants, information constants, attributes and parameters.

#### 17.1.1 General Constants

For the contents of C# general constants, see *General Constants*.

General constants are defined in `Consts` class. User may refer general constants with namespace, that is, `Copt.Consts.XXXX`.

#### 17.1.2 Attributes

For the contents of C# attribute constants, see *Attributes*.

All COPT C# attributes are defined in `DbAttr` and `IntAttr` classes. User may refer double attributes by `Copt.DbAttr.XXXX`, and integer attributes by `Copt.IntAttr.XXXX`.

In the C# API, user can get the attribute value by specifying the attribute name. The two functions of obtaining attribute values are as follows, please refer to *C# API: Model Class* for details.

- `Model.GetIntAttr()`: Get value of a COPT integer attribute.
- `Model.GetDbAttr()`: Get value of a COPT double attribute.

#### 17.1.3 Information

For the contents of C# information constants, see *Information*.

All COPT C# Information constants are defined in `DbInfo` class. User may refer information constants with namespace, that is, `Copt.DbInfo.XXXX`.

### 17.1.4 Parameters

For the contents of C# parameters constants, see *Parameters*.

All COPT C# parameters are defined in `DbiParam` and `IntParam` classes. User may refer double parameters by `Copt.DblParam.XXXX`, and integer parameters by `Copt.IntParam.XXXX`.

In the C# API, user can get and set the parameter value by specifying the parameter name. The provided functions are as follows, please refer to *C# API: Model Class* for details.

- Get detailed information of the specified parameter (current value/max/min): `Model.GetParamInfo()`
- Get the current value of the specified integer/double parameter: `Model.GetIntParam()` / `Model.GetDblParam()`
- Set the specified integer/double parameter value: `Model.SetIntParam()` / `Model.SetDblParam()`

## 17.2 C# Modeling Classes

This chapter documents COPT C# interface. Users may refer to C# classes described below for details of how to construct and solve C# models.

### 17.2.1 Envr

Essentially, any C# application using Cardinal Optimizer should start with a COPT environment. COPT models are always associated with a COPT environment. User must create an environment object before populating models. User generally only need a single environment object in program.

#### 17.2.1.1 Envr.Envr()

Constructor of COPT Envr object.

##### Synopsis

```
Envr()
```

#### 17.2.1.2 Envr.Envr()

Constructor of COPT Envr object, given a license folder.

##### Synopsis

```
Envr(string licDir)
```

##### Arguments

`licDir`: directory having local license or client config file.

### 17.2.1.3 `Envr.Envr()`

Constructor of COPT `Envr` object, given an `Envr` config object.

#### Synopsis

```
Envr(EnvrConfig config)
```

#### Arguments

`config`: `Envr` config object holding settings for remote connection.

### 17.2.1.4 `Envr.Close()`

close remote connection and token becomes invalid for all problems in current `envr`.

#### Synopsis

```
void Close()
```

### 17.2.1.5 `Envr.CreateModel()`

Create a model object.

#### Synopsis

```
Model CreateModel(string name)
```

#### Arguments

`name`: customized model name.

#### Return

a model object.

## 17.2.2 `EnvrConfig`

If user connects to COPT remote services, such as floating token server or compute cluster, it is necessary to add config settings with `EnvrConfig` object.

### 17.2.2.1 `EnvrConfig.EnvrConfig()`

Constructor of `envr` config object.

#### Synopsis

```
EnvrConfig()
```

### 17.2.2.2 `EnvrConfig.Set()`

Set config settings in terms of name-value pair.

#### Synopsis

```
void Set(string name, string value)
```

#### Arguments

`name`: keyword of a config setting.

`value`: value of a config setting.

### 17.2.3 Model

In general, a COPT model consists of a set of variables, a (linear) objective function on these variables, a set of constraints on these variables, etc. COPT model class encapsulates all required methods for constructing a COPT model.

#### 17.2.3.1 Model.Model()

Constructor of model.

##### Synopsis

```
Model(Envr env, string name)
```

##### Arguments

**env:** associated environment object.

**name:** string of model name.

#### 17.2.3.2 Model.AddCone()

Add a cone constraint to model.

##### Synopsis

```
Cone AddCone(ConeBuilder builder)
```

##### Arguments

**builder:** builder for new cone constraint.

##### Return

new cone constraint object.

#### 17.2.3.3 Model.AddCone()

Add a cone constraint to model.

##### Synopsis

```
Cone AddCone(Var[] vars, int type)
```

##### Arguments

**vars:** variables that participate in the cone constraint.

**type:** type of the cone constraint.

##### Return

new cone constraint object.

#### 17.2.3.4 Model.AddCone()

Add a cone constraint to model.

##### Synopsis

```
Cone AddCone(VarArray vars, int type)
```

##### Arguments

**vars:** variables that participate in the cone constraint.

**type:** type of a cone constraint.

##### Return

new cone constraint object.

#### 17.2.3.5 Model.AddCone()

Add a cone constraint to model.

##### Synopsis

```
Cone AddCone(  
    int dim,  
    int type,  
    char[] pvtype,  
    string prefix)
```

##### Arguments

**dim:** dimension of the cone constraint.

**type:** type of the cone constraint.

**pvtype:** type of variables in the cone.

**prefix:** optional, name prefix of variables in the cone, default value is "ConeV".

##### Return

new cone constraint object.

#### 17.2.3.6 Model.AddConstr()

Add a linear constraint to model.

##### Synopsis

```
Constraint AddConstr(  
    Expr expr,  
    char sense,  
    double rhs,  
    string name)
```

##### Arguments

**expr:** expression for the new constraint.

**sense:** sense for new linear constraint, other than range sense.

**rhs:** right hand side value for the new constraint.

name: optional, name of new constraint.

**Return**

new constraint object.

**17.2.3.7 Model.AddConstr()**

Add a linear constraint to model.

**Synopsis**

```
Constraint AddConstr(  
    Expr expr,  
    char sense,  
    Var var,  
    string name)
```

**Arguments**

expr: expression for the new constraint.

sense: sense for new linear constraint, other than range sense.

var: variable as right hand side for the new constraint.

name: optional, name of new constraint.

**Return**

new constraint object.

**17.2.3.8 Model.AddConstr()**

Add a linear constraint to model.

**Synopsis**

```
Constraint AddConstr(  
    Expr lhs,  
    char sense,  
    Expr rhs,  
    string name)
```

**Arguments**

lhs: left hand side expression for the new constraint.

sense: sense for new linear constraint, other than range sense.

rhs: right hand side expression for the new constraint.

name: optional, name of new constraint.

**Return**

new constraint object.

#### 17.2.3.9 Model.AddConstr()

Add a linear constraint to model.

##### Synopsis

```
Constraint AddConstr(  
    Expr expr,  
    double lb,  
    double rb,  
    string name)
```

##### Arguments

**expr:** expression for the new constraint.  
**lb:** lower bound for the new constraint.  
**rb:** upper bound for the new constraint  
**name:** optional, name of new constraint.

##### Return

new constraint object.

#### 17.2.3.10 Model.AddConstr()

Add a linear constraint to a model.

##### Synopsis

```
Constraint AddConstr(ConstrBuilder builder, string name)
```

##### Arguments

**builder:** builder for the new constraint.  
**name:** optional, name of new constraint.

##### Return

new constraint object.

#### 17.2.3.11 Model.AddConstrs()

Add linear constraints to model.

##### Synopsis

```
ConstrArray AddConstrs(  
    int count,  
    char[] senses,  
    double[] rhss,  
    string prefix)
```

##### Arguments

**count:** number of constraints added to model.  
**senses:** sense array for new linear constraints, other than range sense.  
**rhss:** right hand side values for new variables.



prefix: optional, name prefix for new constraints, default value is 'R'.

**Return**

array of new constraint objects.

**17.2.3.12 Model.AddConstrs()**

Add linear constraints to a model.

**Synopsis**

```
ConstrArray AddConstrs(  
    int count,  
    double[] lbs,  
    double[] ubs,  
    string prefix)
```

**Arguments**

count: number of constraints added to the model.

lbs: lower bounds of new constraints.

ubs: upper bounds of new constraints.

prefix: optional, name prefix for new constraints, default value is 'R'.

**Return**

array of new constraint objects.

**17.2.3.13 Model.AddConstrs()**

Add linear constraints to a model.

**Synopsis**

```
ConstrArray AddConstrs(ConstrBuilderArray builders, string prefix)
```

**Arguments**

builders: builders for new constraints.

prefix: optional, name prefix for new constraints, default value is 'R'.

**Return**

array of new constraint objects.

**17.2.3.14 Model.AddDenseMat()**

Add a dense symmetric matrix to a model.

**Synopsis**

```
SymMatrix AddDenseMat(int dim, double[] vals)
```

**Arguments**

dim: dimension of the dense symmetric matrix.

vals: array of non

**Return**

new symmetric matrix object.

#### 17.2.3.15 **Model.AddDenseMat()**

Add a dense symmetric matrix to a model.

##### **Synopsis**

```
SymMatrix AddDenseMat(int dim, double val)
```

##### **Arguments**

**dim**: dimension of dense symmetric matrix.

**val**: value to fill dense symmetric matrix.

##### **Return**

new symmetric matrix object.

#### 17.2.3.16 **Model.AddDiagMat()**

Add a diagonal matrix to a model.

##### **Synopsis**

```
SymMatrix AddDiagMat(int dim, double val)
```

##### **Arguments**

**dim**: dimension of diagonal matrix.

**val**: value to fill diagonal elements.

##### **Return**

new diagonal matrix object.

#### 17.2.3.17 **Model.AddDiagMat()**

Add a diagonal matrix to a model.

##### **Synopsis**

```
SymMatrix AddDiagMat(int dim, double[] vals)
```

##### **Arguments**

**dim**: dimension of diagonal matrix.

**vals**: array of values of diagonal elements.

##### **Return**

new diagonal matrix object.

**17.2.3.18 Model.AddDiagMat()**

Add a diagonal matrix to a model.

**Synopsis**

```
SymMatrix AddDiagMat(  
    int dim,  
    double val,  
    int offset)
```

**Arguments**

**dim:** dimension of diagonal matrix.

**val:** value to fill diagonal elements.

**offset:** shift distance against diagonal line.

**Return**

new diagonal matrix object.

**17.2.3.19 Model.AddDiagMat()**

Add a diagonal matrix to a model.

**Synopsis**

```
SymMatrix AddDiagMat(  
    int dim,  
    double[] vals,  
    int offset)
```

**Arguments**

**dim:** dimension of diagonal matrix.

**vals:** array of values of diagonal elements.

**offset:** shift distance against diagonal line.

**Return**

new diagonal matrix object.

**17.2.3.20 Model.AddEyeMat()**

Add an identity matrix to a model.

**Synopsis**

```
SymMatrix AddEyeMat(int dim)
```

**Arguments**

**dim:** dimension of identity matrix.

**Return**

new identity matrix object.

#### 17.2.3.21 Model.AddGenConstrIndicator()

Add a general constraint of type indicator to model.

##### Synopsis

```
GenConstr AddGenConstrIndicator(GenConstrBuilder builder)
```

##### Arguments

**builder:** builder for the general constraint.

##### Return

new general constraint object of type indicator.

#### 17.2.3.22 Model.AddGenConstrIndicator()

Add a general constraint of type indicator to model.

##### Synopsis

```
GenConstr AddGenConstrIndicator(  
    Var binvar,  
    int binval,  
    ConstrBuilder builder)
```

##### Arguments

**binvar:** binary indicator variable.

**binval:** value for binary indicator variable that force a linear constraint to be satisfied(0 or 1).

**builder:** builder for linear constraint.

##### Return

new general constraint object of type indicator.

#### 17.2.3.23 Model.AddGenConstrIndicator()

Add a general constraint of type indicator to model.

##### Synopsis

```
GenConstr AddGenConstrIndicator(  
    Var binvar,  
    int binval,  
    Expr expr,  
    char sense,  
    double rhs)
```

##### Arguments

**binvar:** binary indicator variable.

**binval:** value for binary indicator variable that force a linear constraint to be satisfied(0 or 1).

**expr:** expression for new linear constraint.

**sense:** sense for new linear constraint.

rhs: right hand side value for new linear constraint.

**Return**

new general constraint object of type indicator.

**17.2.3.24 Model.AddOnesMat()**

Add a dense symmetric matrix of value one to a model.

**Synopsis**

```
SymMatrix AddOnesMat(int dim)
```

**Arguments**

dim: dimension of dense symmetric matrix.

**Return**

new symmetric matrix object.

**17.2.3.25 Model.AddPsdConstr()**

Add a PSD constraint to model.

**Synopsis**

```
PsdConstraint AddPsdConstr(  
    PsdExpr expr,  
    char sense,  
    double rhs,  
    string name)
```

**Arguments**

expr: PSD expression for new PSD constraint.

sense: sense for new PSD constraint.

rhs: double value at right side of the new PSD constraint.

name: optional, name of new PSD constraint.

**Return**

new PSD constraint object.

**17.2.3.26 Model.AddPsdConstr()**

Add a PSD constraint to model.

**Synopsis**

```
PsdConstraint AddPsdConstr(  
    PsdExpr expr,  
    double lb,  
    double ub,  
    string name)
```

**Arguments**

**expr:** expression for new PSD constraint.  
**lb:** lower bound for ew PSD constraint.  
**ub:** upper bound for new PSD constraint  
**name:** optional, name of new PSD constraint.

**Return**

new PSD constraint object.

**17.2.3.27 Model.AddPsdConstr()**

Add a PSD constraint to model.

**Synopsis**

```
PsdConstraint AddPsdConstr(  
    PsdExpr lhs,  
    char sense,  
    PsdExpr rhs,  
    string name)
```

**Arguments**

**lhs:** PSD expression at left side of new PSD constraint.  
**sense:** sense for new PSD constraint.  
**rhs:** PSD expression at right side of new PSD constraint.  
**name:** optional, name of new PSD constraint.

**Return**

new PSD constraint object.

**17.2.3.28 Model.AddPsdConstr()**

Add a PSD constraint to a model.

**Synopsis**

```
PsdConstraint AddPsdConstr(PsdConstrBuilder builder, string name)
```

**Arguments**

**builder:** builder for new PSD constraint.  
**name:** optional, name of new PSD constraint.

**Return**

new PSD constraint object.

#### 17.2.3.29 Model.AddPsdVar()

Add a new PSD variable to model.

##### Synopsis

```
PsdVar AddPsdVar(int dim, string name)
```

##### Arguments

**dim:** dimension of new PSD variable.

**name:** name of new PSD variable.

##### Return

PSD variable object.

#### 17.2.3.30 Model.AddPsdVars()

Add new PSD variables to model.

##### Synopsis

```
PsdVarArray AddPsdVars(  
    int count,  
    int[] dims,  
    string prefix)
```

##### Arguments

**count:** number of new PSD variables.

**dims:** array of dimensions of new PSD variables.

**prefix:** name prefix of new PSD variables, default prefix is PSD\_V.

##### Return

array of PSD variable objects.

#### 17.2.3.31 Model.AddQConstr()

Add a quadratic constraint to model.

##### Synopsis

```
QConstraint AddQConstr(  
    QuadExpr expr,  
    char sense,  
    double rhs,  
    string name)
```

##### Arguments

**expr:** quadratic expression for the new constraint.

**sense:** sense for new quadratic constraint.

**rhs:** double value at right side of the new quadratic constraint.

**name:** optional, name of new quadratic constraint.

##### Return

new quadratic constraint object.

#### 17.2.3.32 **Model.AddQConstr()**

Add a quadratic constraint to model.

##### **Synopsis**

```
QConstraint AddQConstr(  
    QuadExpr lhs,  
    char sense,  
    QuadExpr rhs,  
    string name)
```

##### **Arguments**

**lhs**: quadratic expression at left side of the new quadratic constraint.

**sense**: sense for new quadratic constraint.

**rhs**: quadratic expression at right side of the new quadratic constraint.

**name**: optional, name of new quadratic constraint.

##### **Return**

new quadratic constraint object.

#### 17.2.3.33 **Model.AddQConstr()**

Add a quadratic constraint to a model.

##### **Synopsis**

```
QConstraint AddQConstr(QConstrBuilder builder, string name)
```

##### **Arguments**

**builder**: builder for the new quadratic constraint.

**name**: optional, name of new quadratic constraint.

##### **Return**

new quadratic constraint object.

#### 17.2.3.34 **Model.AddSos()**

Add a SOS constraint to model.

##### **Synopsis**

```
Sos AddSos(SosBuilder builder)
```

##### **Arguments**

**builder**: builder for new SOS constraint.

##### **Return**

new SOS constraint object.



**17.2.3.35 Model.AddSos()**

Add a SOS constraint to model.

**Synopsis**

```
Sos AddSos(  
    Var[] vars,  
    double[] weights,  
    int type)
```

**Arguments**

**vars:** variables that participate in the SOS constraint.

**weights:** weights for variables in the SOS constraint.

**type:** type of SOS constraint.

**Return**

new SOS constraint object.

**17.2.3.36 Model.AddSos()**

Add a SOS constraint to model.

**Synopsis**

```
Sos AddSos(  
    VarArray vars,  
    double[] weights,  
    int type)
```

**Arguments**

**vars:** variables that participate in the SOS constraint.

**weights:** weights for variables in the SOS constraint.

**type:** type of SOS constraint.

**Return**

new SOS constraint object.

**17.2.3.37 Model.AddSparseMat()**

Add a sparse symmetric matrix to a model.

**Synopsis**

```
SymMatrix AddSparseMat(  
    int dim,  
    int nElems,  
    int[] rows,  
    int[] cols,  
    double[] vals)
```

**Arguments**

**dim:** dimension of the sparse symmetric matrix.

**nElems:** number of non

**rows:** array of row indexes of non

**cols:** array of col indexes of non

**vals:** array of values of non

#### **Return**

new symmetric matrix object.

### **17.2.3.38 Model.AddSymMat()**

Given a symmetric matrix expression, add results matrix to model.

#### **Synopsis**

```
SymMatrix AddSymMat(SymMatExpr expr)
```

#### **Arguments**

**expr:** symmetric matrix expression object.

#### **Return**

results symmetric matrix object.

### **17.2.3.39 Model.AddVar()**

Add a variable and the associated non-zero coefficients as column.

#### **Synopsis**

```
Var AddVar(  
    double lb,  
    double ub,  
    double obj,  
    char vtype,  
    string name)
```

#### **Arguments**

**lb:** lower bound for new variable.

**ub:** upper bound for new variable.

**obj:** objective coefficient for new variable.

**vtype:** variable type for new variable.

**name:** optional, name for new variable.

#### **Return**

new variable object.

**17.2.3.40 Model.AddVar()**

Add a variable and the associated non-zero coefficients as column.

**Synopsis**

```
Var AddVar(  
    double lb,  
    double ub,  
    double obj,  
    char vtype,  
    Column col,  
    string name)
```

**Arguments**

lb: lower bound for new variable.

ub: upper bound for new variable.

obj: objective coefficient for new variable.

vtype: variable type for new variable.

col: column object for specifying a set of constraints to which the variable belongs.

name: optional, name for new variable.

**Return**

new variable object.

**17.2.3.41 Model.AddVars()**

Add new variables to model.

**Synopsis**

```
VarArray AddVars(  
    int count,  
    char vtype,  
    string prefix)
```

**Arguments**

count: the number of variables to add.

vtype: variable types for new variables.

prefix: optional, prefix part for names of new variables, default value is 'C'.

**Return**

array of new variable objects.

**17.2.3.42 Model.AddVars()**

Add new variables to model.

**Synopsis**

```
VarArray AddVars(
    int count,
    double lb,
    double ub,
    double obj,
    char vtype,
    string prefix)
```

**Arguments**

**count:** the number of variables to add.

**lb:** lower bound for new variables.

**ub:** upper bound for new variables.

**obj:** objective coefficient for new variables.

**vtype:** variable type for new variables.

**prefix:** optional, prefix part for names of new variables, default value is 'C'.

**Return**

array of new variable objects.

**17.2.3.43 Model.AddVars()**

Add new variables to model.

**Synopsis**

```
VarArray AddVars(
    int count,
    double[] lbs,
    double[] ubs,
    double[] objs,
    char[] types,
    string prefix)
```

**Arguments**

**count:** the number of variables to add.

**lbs:** lower bounds for new variables. if NULL, lower bounds are 0.0.

**ubs:** upper bounds for new variables. if NULL, upper bounds are infinity or 1 for binary variables.

**objs:** objective coefficients for new variables. if NULL, objective coefficients are 0.0.

**types:** variable types for new variables. if NULL, variable types are continuous.

**prefix:** optional, prefix part for names of new variables, default value is 'C'.

**Return**

array of new variable objects.

**17.2.3.44 Model.AddVars()**

Add new variables to model.

**Synopsis**

```
VarArray AddVars(  
    double[] lbs,  
    double[] ubs,  
    double[] objs,  
    char[] types,  
    Column[] cols,  
    string prefix)
```

**Arguments**

**lbs:** lower bounds for new variables. if NULL, lower bounds are 0.0.

**ubs:** upper bounds for new variables. if NULL, upper bounds are infinity or 1 for binary variables.

**objs:** objective coefficients for new variables. if NULL, objective coefficients are 0.0.

**types:** variable types for new variables. if NULL, variable types are continuous.

**cols:** column objects for specifying a set of constraints to which each new variable belongs.

**prefix:** optional, prefix part for names of new variables, default value is 'C'.

**Return**

array of new variable objects.

**17.2.3.45 Model.AddVars()**

Add new variables to model.

**Synopsis**

```
VarArray AddVars(  
    double[] lbs,  
    double[] ubs,  
    double[] objs,  
    char[] types,  
    ColumnArray cols,  
    string prefix)
```

**Arguments**

**lbs:** lower bounds for new variables. if NULL, lower bounds are 0.0.

**ubs:** upper bounds for new variables. if NULL, upper bounds are infinity or 1 for binary variables.

**objs:** objective coefficients for new variables. if NULL, objective coefficients are 0.0.

**types:** variable types for new variables. if NULL, variable types are continuous.

**cols:** columnarray for specifying a set of constraints to which each new variable belongs.

**prefix:** optional, prefix part for names of new variables, default value is 'C'.

**Return**

array of new variable objects.

#### **17.2.3.46 Model.Clear()**

Clear all settings including problem itself.

**Synopsis**

```
void Clear()
```

#### **17.2.3.47 Model.Clone()**

Deep copy a new model object.

**Synopsis**

```
Model Clone()
```

**Return**

cloned model object.

#### **17.2.3.48 Model.ComputeIIS()**

Compute IIS for model

**Synopsis**

```
void ComputeIIS()
```

#### **17.2.3.49 Model.DelPsdObj()**

delete PSD part of objective in model.

**Synopsis**

```
void DelPsdObj()
```

#### 17.2.3.50 Model.DelQuadObj()

delete quadratic part of objective in model.

##### Synopsis

```
void DelQuadObj()
```

#### 17.2.3.51 Model.FeasRelax()

Compute feasibility relaxation for infeasible model.

##### Synopsis

```
void FeasRelax(  
    VarArray vars,  
    double[] colLowPen,  
    double[] colUppPen,  
    ConstrArray cons,  
    double[] rowBndPen,  
    double[] rowUppPen)
```

##### Arguments

**vars**: an array of variables.  
**colLowPen**: penalties for lower bounds of variables.  
**colUppPen**: penalties for upper bounds of variables.  
**cons**: an array of constraints.  
**rowBndPen**: penalties for right hand sides of constraints.  
**rowUppPen**: penalties for upper bounds of range constraints.

#### 17.2.3.52 Model.FeasRelax()

Compute feasibility relaxation for infeasible model.

##### Synopsis

```
void FeasRelax(int ifRelaxVars, int ifRelaxCons)
```

##### Arguments

**ifRelaxVars**: whether to relax variables.  
**ifRelaxCons**: whether to relax constraints.

#### 17.2.3.53 Model.Get()

Query values of double parameter or double attribute, associated with variables.

##### Synopsis

```
double[] Get(string name, Var[] vars)
```

##### Arguments

**name**: name of double parameter or double attribute.  
**vars**: a list of interested variables.

**Return**

values of parameter or attribute.

**17.2.3.54 Model.Get()**

Query values of double parameter or double attribute, associated with variables.

**Synopsis**

```
double[] Get(string name, VarArray vars)
```

**Arguments**

**name:** name of double parameter or double attribute.

**vars:** array of interested variables.

**Return**

values of parameter or attribute.

**17.2.3.55 Model.Get()**

Query values of parameter or attribute, associated with constraints.

**Synopsis**

```
double[] Get(string name, Constraint[] constrs)
```

**Arguments**

**name:** name of double parameter or double attribute.

**constrs:** a list of interested constraints.

**Return**

values of parameter or attribute.

**17.2.3.56 Model.Get()**

Query values of parameter or attribute, associated with constraints.

**Synopsis**

```
double[] Get(string name, ConstrArray constrs)
```

**Arguments**

**name:** name of double parameter or double attribute.

**constrs:** array of interested constraints.

**Return**

values of parameter or attribute.



**17.2.3.57 Model.Get()**

Query values of parameter or attribute, associated with quadratic constraints.

**Synopsis**

```
double[] Get(string name, QConstraint[] constrs)
```

**Arguments**

**name:** name of double parameter or double attribute.

**constrs:** a list of interested quadratic constraints.

**Return**

values of parameter or attribute.

**17.2.3.58 Model.Get()**

Query values of parameter or attribute, associated with quadratic constraints.

**Synopsis**

```
double[] Get(string name, QConstrArray constrs)
```

**Arguments**

**name:** name of double parameter or double attribute.

**constrs:** array of interested quadratic constraints.

**Return**

values of parameter or attribute.

**17.2.3.59 Model.Get()**

Query values of parameter or attribute, associated with PSD constraints.

**Synopsis**

```
double[] Get(string name, PsdConstraint[] constrs)
```

**Arguments**

**name:** name of double parameter or attribute.

**constrs:** a list of desired PSD constraints.

**Return**

output array of parameter or attribute values.

**17.2.3.60 Model.Get()**

Query values of parameter or attribute, associated with PSD constraints.

**Synopsis**

```
double[] Get(string name, PsdConstrArray constrs)
```

**Arguments**

**name:** name of double parameter or attribute.

**constrs:** a list of desired PSD constraints.

**Return**

output array of parameter or attribute values.

#### 17.2.3.61 **Model.GetCoeff()**

Get the coefficient of variable in linear constraint.

##### **Synopsis**

```
double GetCoeff(Constraint constr, Var var)
```

##### **Arguments**

**constr:** The requested constraint.

**var:** The requested variable.

##### **Return**

The requested coefficient.

#### 17.2.3.62 **Model.GetCol()**

Get a column object that have a list of constraints in which the variable participates.

##### **Synopsis**

```
Column GetCol(Var var)
```

##### **Arguments**

**var:** a variable object.

##### **Return**

a column object associated with a variable.

#### 17.2.3.63 **Model.GetColBasis()**

Get status of column basis.

##### **Synopsis**

```
int[] GetColBasis()
```

##### **Return**

basis status.

#### 17.2.3.64 **Model.GetCone()**

Get a cone constraint of given index in model.

##### **Synopsis**

```
Cone GetCone(int idx)
```

##### **Arguments**

**idx:** index of the desired cone constraint.

##### **Return**

the desired cone constraint object.

**17.2.3.65 Model.GetConeBuilders()**

Get builders of all cone constraints in model.

**Synopsis**

```
ConeBuilderArray GetConeBuilders()
```

**Return**

array object of cone constraint builders.

**17.2.3.66 Model.GetConeBuilders()**

Get builders of given cone constraints in model.

**Synopsis**

```
ConeBuilderArray GetConeBuilders(Cone[] cones)
```

**Arguments**

**cones:** array of cone constraints.

**Return**

array object of desired cone constraint builders.

**17.2.3.67 Model.GetConeBuilders()**

Get builders of given cone constraints in model.

**Synopsis**

```
ConeBuilderArray GetConeBuilders(ConeArray cones)
```

**Arguments**

**cones:** array of cone constraints.

**Return**

array object of desired cone constraint builders.

**17.2.3.68 Model.GetCones()**

Get all cone constraints in model.

**Synopsis**

```
ConeArray GetCones()
```

**Return**

array object of cone constraints.

**17.2.3.69 Model.GetConstr()**

Get a constraint of given index in model.

**Synopsis**

```
Constraint GetConstr(int idx)
```

**Arguments**

idx: index of the desired constraint.

**Return**

the desired constraint object.

**17.2.3.70 Model.GetConstrBuilder()**

Get builder of a constraint in model, including variables and associated coefficients, sense and RHS.

**Synopsis**

```
ConstrBuilder GetConstrBuilder(Constraint constr)
```

**Arguments**

constr: a constraint object.

**Return**

constraint builder object.

**17.2.3.71 Model.GetConstrBuilders()**

Get builders of all constraints in model.

**Synopsis**

```
ConstrBuilderArray GetConstrBuilders()
```

**Return**

array object of constraint builders.

**17.2.3.72 Model.GetConstrByName()**

Get a constraint of given name in model.

**Synopsis**

```
Constraint GetConstrByName(string name)
```

**Arguments**

name: name of the desired constraint.

**Return**

the desired constraint object.

**17.2.3.73 Model.GetConstrLowerIIS()**

Get IIS status of lower bounds of constraints.

**Synopsis**

```
int[] GetConstrLowerIIS(ConstrArray constrs)
```

**Arguments**

constrs: Array of constraints.

**Return**

IIS status of lower bounds of constraints.

**17.2.3.74 Model.GetConstrLowerIIS()**

Get IIS status of lower bounds of constraints.

**Synopsis**

```
int[] GetConstrLowerIIS(Constraint[] constrs)
```

**Arguments**

constrs: Array of constraints.

**Return**

IIS status of lower bounds of constraints.

**17.2.3.75 Model.GetConstrs()**

Get all constraints in model.

**Synopsis**

```
ConstrArray GetConstrs()
```

**Return**

array object of constraints.

**17.2.3.76 Model.GetConstrUpperIIS()**

Get IIS status of upper bounds of constraints.

**Synopsis**

```
int[] GetConstrUpperIIS(ConstrArray constrs)
```

**Arguments**

constrs: Array of constraints.

**Return**

IIS status of upper bounds of constraints.

**17.2.3.77 Model.GetConstrUpperIIS()**

Get IIS status of upper bounds of constraints.

**Synopsis**

```
int[] GetConstrUpperIIS(Constraint[] constrs)
```

**Arguments**

constrs: Array of constraints.

**Return**

IIS status of upper bounds of constraints.

**17.2.3.78 Model.GetDblAttr()**

Get value of a COPT double attribute.

**Synopsis**

```
double GetDblAttr(string attr)
```

**Arguments**

attr: name of double attribute.

**Return**

value of double attribute.

**17.2.3.79 Model.GetDblParam()**

Get value of a COPT double parameter.

**Synopsis**

```
double GetDblParam(string param)
```

**Arguments**

param: name of integer parameter.

**Return**

value of double parameter.

**17.2.3.80 Model.GetGenConstrIndicator()**

Get builder of given general constraint of type indicator.

**Synopsis**

```
GenConstrBuilder GetGenConstrIndicator(GenConstr indicator)
```

**Arguments**

indicator: a general constraint of type indicator.

**Return**

builder object of general constraint of type indicator.

**17.2.3.81 Model.GetIndicatorIIS()**

Get IIS status of indicator constraints.

**Synopsis**

```
int[] GetIndicatorIIS(GenConstrArray genconstrs)
```

**Arguments**

genconstrs: Array of indicator constraints.

**Return**

IIS status of indicator constraints.

**17.2.3.82 Model.GetIndicatorIIS()**

Get IIS status of indicator constraints.

**Synopsis**

```
int[] GetIndicatorIIS(GenConstr[] genconstrs)
```

**Arguments**

genconstrs: Array of indicator constraints.

**Return**

IIS status of indicator constraints.

**17.2.3.83 Model.GetIntAttr()**

Get value of a COPT integer attribute.

**Synopsis**

```
int GetIntAttr(string attr)
```

**Arguments**

attr: name of integer attribute.

**Return**

value of integer attribute.

**17.2.3.84 Model.GetIntParam()**

Get value of a COPT integer parameter.

**Synopsis**

```
int GetIntParam(string param)
```

**Arguments**

param: name of integer parameter.

**Return**

value of integer parameter.

**17.2.3.85 Model.GetLpSolution()**

Get LP solution.

**Synopsis**

```
void GetLpSolution(  
    out double[] value,  
    out double[] slack,  
    out double[] rowDual,  
    out double[] redCost)
```

**Arguments**

value: out, solution values.

slack: out, slack values.

rowDual: out, dual values.

redCost: out, reduced costs.

**17.2.3.86 Model.GetObjective()**

Get linear expression of objective for model.

**Synopsis**

```
Expr GetObjective()
```

**Return**

an linear expression object.

**17.2.3.87 Model.GetParamInfo()**

Get current, default, minimum, maximum of COPT integer parameter.

**Synopsis**

```
void GetParamInfo(  
    string name,  
    out int cur,  
    out int def,  
    out int min,  
    out int max)
```

**Arguments**

name: name of integer parameter.

cur: out, current value of integer parameter.

def: out, default value of integer parameter.

min: out, minimum value of integer parameter.

max: out, maximum value of integer parameter.



**17.2.3.88 Model.GetParamInfo()**

Get current, default, minimum, maximum of COPT double parameter.

**Synopsis**

```
void GetParamInfo(  
    string name,  
    out double cur,  
    out double def,  
    out double min,  
    out double max)
```

**Arguments**

**name:** name of integer parameter.  
**cur:** out, current value of double parameter.  
**def:** out, default value of double parameter.  
**min:** out, minimum value of double parameter.  
**max:** out, maximum value of double parameter.

**17.2.3.89 Model.GetPoolObjVal()**

Get the idx-th objective value in solution pool.

**Synopsis**

```
double GetPoolObjVal(int idx)
```

**Arguments**

**idx:** Index of solution.

**Return**

The requested objective value.

**17.2.3.90 Model.GetPoolSolution()**

Get the idx-th solution in solution pool.

**Synopsis**

```
double[] GetPoolSolution(int idx, VarArray vars)
```

**Arguments**

**idx:** Index of solution.  
**vars:** The requested variables.

**Return**

The requested solution.

#### 17.2.3.91 Model.GetPoolSolution()

Get the idx-th solution in solution pool.

##### Synopsis

```
double[] GetPoolSolution(int idx, Var[] vars)
```

##### Arguments

idx: Index of solution.

vars: The requested variables.

##### Return

The requested solution.

#### 17.2.3.92 Model.GetPsdCoeff()

Get the symmetric matrix of PSD variable in a PSD constraint.

##### Synopsis

```
SymMatrix GetPsdCoeff(PsdConstraint constr, PsdVar var)
```

##### Arguments

constr: The desired PSD constraint.

var: The desired PSD variable.

##### Return

The associated coefficient matrix.

#### 17.2.3.93 Model.GetPsdConstr()

Get a quadratic constraint of given index in model.

##### Synopsis

```
PsdConstraint GetPsdConstr(int idx)
```

##### Arguments

idx: index of the desired quadratic constraint.

##### Return

the desired quadratic constraint object.

#### 17.2.3.94 Model.GetPsdConstrBuilder()

Get builder of a PSD constraint in model, including PSD variables, sense and associated symmetric matrix.

##### Synopsis

```
PsdConstrBuilder GetPsdConstrBuilder(PsdConstraint constr)
```

##### Arguments

constr: a PSD constraint object.

##### Return

PSD constraint builder object.

**17.2.3.95 Model.GetPsdConstrBuilders()**

Get builders of all PSD constraints in model.

**Synopsis**

```
PsdConstrBuilderArray GetPsdConstrBuilders()
```

**Return**

array object of PSD constraint builders.

**17.2.3.96 Model.GetPsdConstrByName()**

Get a quadratic constraint of given name in model.

**Synopsis**

```
PsdConstraint GetPsdConstrByName(string name)
```

**Arguments**

name: name of the desired constraint.

**Return**

the desired quadratic constraint object.

**17.2.3.97 Model.GetPsdConstrs()**

Get all PSD constraints in model.

**Synopsis**

```
PsdConstrArray GetPsdConstrs()
```

**Return**

array object of PSD constraints.

**17.2.3.98 Model.GetPsdObjective()**

Get PSD objective of model.

**Synopsis**

```
PsdExpr GetPsdObjective()
```

**Return**

a PSD expression object.

**17.2.3.99 Model.GetPsdRow()**

Get PSD variables and associated symmetric matrix that participate in a PSD constraint.

**Synopsis**

```
PsdExpr GetPsdRow(PsdConstraint constr)
```

**Arguments**

constr: a PSD constraint object.

**Return**

PSD expression object of the PSD constraint.

**17.2.3.100 Model.GetPsdVar()**

Get a PSD variable of given index in model.

**Synopsis**

```
PsdVar GetPsdVar(int idx)
```

**Arguments**

idx: index of the desired PSD variable.

**Return**

the desired PSD variable object.

**17.2.3.101 Model.GetPsdVarByName()**

Get a PSD variable of given name in model.

**Synopsis**

```
PsdVar GetPsdVarByName(string name)
```

**Arguments**

name: name of the desired PSD variable.

**Return**

the desired PSD variable object.

**17.2.3.102 Model.GetPsdVars()**

Get all PSD variables in model.

**Synopsis**

```
PsdVarArray GetPsdVars()
```

**Return**

array object of PSD variables.

**17.2.3.103 Model.GetQConstr()**

Get a quadratic constraint of given index in model.

**Synopsis**

```
QConstraint GetQConstr(int idx)
```

**Arguments**

idx: index of the desired quadratic constraint.

**Return**

the desired quadratic constraint object.

**17.2.3.104 Model.GetQConstrBuilder()**

Get builder of a constraint in model, including variables and associated coefficients, sense and RHS.

**Synopsis**

```
QConstrBuilder GetQConstrBuilder(QConstraint constr)
```

**Arguments**

`constr`: a constraint object.

**Return**

constraint builder object.

**17.2.3.105 Model.GetQConstrBuilders()**

Get builders of all constraints in model.

**Synopsis**

```
QConstrBuilderArray GetQConstrBuilders()
```

**Return**

array object of constraint builders.

**17.2.3.106 Model.GetQConstrByName()**

Get a quadratic constraint of given name in model.

**Synopsis**

```
QConstraint GetQConstrByName(string name)
```

**Arguments**

`name`: name of the desired constraint.

**Return**

the desired quadratic constraint object.

**17.2.3.107 Model.GetQConstrs()**

Get all quadratic constraints in model.

**Synopsis**

```
QConstrArray GetQConstrs()
```

**Return**

array object of quadratic constraints.

**17.2.3.108 Model.GetQuadObjective()**

Get quadratic objective of model.

**Synopsis**

```
QuadExpr GetQuadObjective()
```

**Return**

a quadratic expression object.

**17.2.3.109 Model.GetQuadRow()**

Get two variables and associated coefficients that participate in a quadratic constraint.

**Synopsis**

```
QuadExpr GetQuadRow(QConstraint constr)
```

**Arguments**

constr: a quadratic constraint object.

**Return**

quadratic expression object of the constraint.

**17.2.3.110 Model.GetRow()**

Get variables that participate in a constraint, and the associated coefficients.

**Synopsis**

```
Expr GetRow(Constraint constr)
```

**Arguments**

constr: a constraint object.

**Return**

expression object of the constraint.

**17.2.3.111 Model.GetRowBasis()**

Get status of row basis.

**Synopsis**

```
int[] GetRowBasis()
```

**Return**

basis status.

**17.2.3.112 Model.GetSolution()**

Get MIP solution.

**Synopsis**

```
double[] GetSolution()
```

**Return**

solution values.

**17.2.3.113 Model.GetSos()**

Get a SOS constraint of given index in model.

**Synopsis**

```
Sos GetSos(int idx)
```

**Arguments**

idx: index of the desired SOS constraint.

**Return**

the desired SOS constraint object.

**17.2.3.114 Model.GetSosBuilders()**

Get builders of all SOS constraints in model.

**Synopsis**

```
SosBuilderArray GetSosBuilders()
```

**Return**

array object of SOS constraint builders.

**17.2.3.115 Model.GetSosBuilders()**

Get builders of given SOS constraints in model.

**Synopsis**

```
SosBuilderArray GetSosBuilders(Sos[] soss)
```

**Arguments**

soss: array of SOS constraints.

**Return**

array object of desired SOS constraint builders.

**17.2.3.116 Model.GetSosBuilders()**

Get builders of given SOS constraints in model.

**Synopsis**

```
SosBuilderArray GetSosBuilders(SosArray soss)
```

**Arguments**

soss: array of SOS constraints.

**Return**

array object of desired SOS constraint builders.

**17.2.3.117 Model.GetSOSIIS()**

Get IIS status of SOS constraints.

**Synopsis**

```
int[] GetSOSIIS(SosArray soss)
```

**Arguments**

soss: Array of SOS constraints.

**Return**

IIS status of SOS constraints.

**17.2.3.118 Model.GetSOSIIS()**

Get IIS status of SOS constraints.

**Synopsis**

```
int[] GetSOSIIS(Sos[] soss)
```

**Arguments**

soss: Array of SOS constraints.

**Return**

IIS status of SOS constraints.

**17.2.3.119 Model.GetSoss()**

Get all SOS constraints in model.

**Synopsis**

```
SosArray GetSoss()
```

**Return**

array object of SOS constraints.



**17.2.3.120 Model.GetSymMat()**

Get a symmetric matrix of given index in model.

**Synopsis**

```
SymMatrix GetSymMat(int idx)
```

**Arguments**

idx: index of the desired symmetric matrix.

**Return**

the desired symmetric matrix object.

**17.2.3.121 Model.GetVar()**

Get a variable of given index in model.

**Synopsis**

```
Var GetVar(int idx)
```

**Arguments**

idx: index of the desired variable.

**Return**

the desired variable object.

**17.2.3.122 Model.GetVarByName()**

Get a variable of given name in model.

**Synopsis**

```
Var GetVarByName(string name)
```

**Arguments**

name: name of the desired variable.

**Return**

the desired variable object.

**17.2.3.123 Model.GetVarLowerIIS()**

Get IIS status of lower bounds of variables.

**Synopsis**

```
int[] GetVarLowerIIS(VarArray vars)
```

**Arguments**

vars: Array of variables.

**Return**

IIS status of lower bounds of variables.

**17.2.3.124 Model.GetVarLowerIIS()**

Get IIS status of lower bounds of variables.

**Synopsis**

```
int[] GetVarLowerIIS(Var[] vars)
```

**Arguments**

**vars:** Array of variables.

**Return**

IIS status of lower bounds of variables.

**17.2.3.125 Model.GetVars()**

Get all variables in model.

**Synopsis**

```
VarArray GetVars()
```

**Return**

variable array object.

**17.2.3.126 Model.GetVarUpperIIS()**

Get IIS status of upper bounds of variables.

**Synopsis**

```
int[] GetVarUpperIIS(VarArray vars)
```

**Arguments**

**vars:** Array of variables.

**Return**

IIS status of upper bounds of variables.

**17.2.3.127 Model.GetVarUpperIIS()**

Get IIS status of upper bounds of variables.

**Synopsis**

```
int[] GetVarUpperIIS(Var[] vars)
```

**Arguments**

**vars:** Array of variables.

**Return**

IIS status of upper bounds of variables.

**17.2.3.128 Model.Interrupt()**

Interrupt optimization of current problem.

**Synopsis**

```
void Interrupt()
```

**17.2.3.129 Model.LoadMipStart()**

Load final initial values of variables to the problem.

**Synopsis**

```
void LoadMipStart()
```

**17.2.3.130 Model.LoadTuneParam()**

Load specified tuned parameters into model.

**Synopsis**

```
void LoadTuneParam(int idx)
```

**Arguments**

idx: Index of tuned parameters.

**17.2.3.131 Model.Read()**

Read problem, solution, basis, MIP start or COPT parameters from file.

**Synopsis**

```
void Read(string filename)
```

**Arguments**

filename: an input file name.

**17.2.3.132 Model.ReadBasis()**

Read basis from file.

**Synopsis**

```
void ReadBasis(string filename)
```

**Arguments**

filename: an input file name

**17.2.3.133 Model.ReadBin()**

Read problem in COPT binary format from file.

**Synopsis**

```
void ReadBin(string filename)
```

**Arguments**

filename: an input file name.

**17.2.3.134 Model.ReadCbf()**

Read problem in CBF format from file.

**Synopsis**

```
void ReadCbf(string filename)
```

**Arguments**

filename: an input file name.

**17.2.3.135 Model.ReadLp()**

Read problem in LP format from file.

**Synopsis**

```
void ReadLp(string filename)
```

**Arguments**

filename: an input file name.

**17.2.3.136 Model.ReadMps()**

Read problem in MPS format from file.

**Synopsis**

```
void ReadMps(string filename)
```

**Arguments**

filename: an input file name.

**17.2.3.137 Model.ReadMst()**

Read MIP start information from file.

**Synopsis**

```
void ReadMst(string filename)
```

**Arguments**

filename: an input file name.

**17.2.3.138 Model.ReadParam()**

Read COPT parameters from file.

**Synopsis**

```
void ReadParam(string filename)
```

**Arguments**

filename: an input file name.

**17.2.3.139 Model.ReadSdpa()**

Read problem in SDPA format from file.

**Synopsis**

```
void ReadSdpa(string filename)
```

**Arguments**

filename: an input file name.

**17.2.3.140 Model.ReadSol()**

Read solution from file.

**Synopsis**

```
void ReadSol(string filename)
```

**Arguments**

filename: an input file name.

**17.2.3.141 Model.ReadTune()**

Read tuning parameters from file.

**Synopsis**

```
void ReadTune(string filename)
```

**Arguments**

filename: an input file name.

**17.2.3.142 Model.Remove()**

Remove an array of variables from model.

**Synopsis**

```
void Remove(Var[] vars)
```

**Arguments**

vars: a list of variables.

**17.2.3.143 Model.Remove()**

Remove an array of variables from model.

**Synopsis**

```
void Remove(VarArray vars)
```

**Arguments**

vars: array of variables.

**17.2.3.144 Model.Remove()**

Remove a list of constraints from model.

**Synopsis**

```
void Remove(Constraint[] constrs)
```

**Arguments**

**constrs:** a list of constraints.

**17.2.3.145 Model.Remove()**

Remove a list of constraints from model.

**Synopsis**

```
void Remove(ConstrArray constrs)
```

**Arguments**

**constrs:** an array of constraints.

**17.2.3.146 Model.Remove()**

Remove a list of SOS constraints from model.

**Synopsis**

```
void Remove(Sos[] soss)
```

**Arguments**

**soss:** a list of SOS constraints.

**17.2.3.147 Model.Remove()**

Remove a list of SOS constraints from model.

**Synopsis**

```
void Remove(SosArray soss)
```

**Arguments**

**soss:** an array of SOS constraints.

**17.2.3.148 Model.Remove()**

Remove a list of Cone constraints from model.

**Synopsis**

```
void Remove(Cone[] cones)
```

**Arguments**

**cones:** a list of Cone constraints.

**17.2.3.149 Model.Remove()**

Remove a list of Cone constraints from model.

**Synopsis**

```
void Remove(ConeArray cones)
```

**Arguments**

cones: an array of Cone constraints.

**17.2.3.150 Model.Remove()**

Remove a list of gernal constraints from model.

**Synopsis**

```
void Remove(GenConstr[] genConstrs)
```

**Arguments**

genConstrs: a list of general constraints.

**17.2.3.151 Model.Remove()**

Remove a list of gernal constraints from model.

**Synopsis**

```
void Remove(GenConstrArray genConstrs)
```

**Arguments**

genConstrs: an array of general constraints.

**17.2.3.152 Model.Remove()**

Remove a list of quadratic constraints from model.

**Synopsis**

```
void Remove(QConstraint[] qconstrs)
```

**Arguments**

qconstrs: an array of quadratic constraints.

**17.2.3.153 Model.Remove()**

Remove a list of quadratic constraints from model.

**Synopsis**

```
void Remove(QConstrArray qconstrs)
```

**Arguments**

qconstrs: an array of quadratic constraints.

**17.2.3.154 Model.Remove()**

Remove a list of PSD variables from model.

**Synopsis**

```
void Remove(PsdVar[] vars)
```

**Arguments**

**vars:** an array of PSD variables.

**17.2.3.155 Model.Remove()**

Remove a list of PSD variables from model.

**Synopsis**

```
void Remove(PsdVarArray vars)
```

**Arguments**

**vars:** an array of PSD variables.

**17.2.3.156 Model.Remove()**

Remove a list of PSD constraints from model.

**Synopsis**

```
void Remove(PsdConstraint[] constrs)
```

**Arguments**

**constrs:** an array of PSD constraints.

**17.2.3.157 Model.Remove()**

Remove a list of PSD constraints from model.

**Synopsis**

```
void Remove(PsdConstrArray constrs)
```

**Arguments**

**constrs:** an array of PSD constraints.

**17.2.3.158 Model.Reset()**

Reset solution only.

**Synopsis**

```
void Reset()
```



**17.2.3.159 Model.ResetAll()**

Reset solution and additional information.

**Synopsis**

```
void ResetAll()
```

**17.2.3.160 Model.ResetParam()**

Reset parameters to default settings.

**Synopsis**

```
void ResetParam()
```

**17.2.3.161 Model.Set()**

Set values of double parameter or double attribute, associated with variables.

**Synopsis**

```
void Set(  
    string name,  
    Var[] vars,  
    double[] vals)
```

**Arguments**

**name:** name of double parameter or double attribute.

**vars:** a list of interested variables.

**vals:** values of parameter or attribute.

**17.2.3.162 Model.Set()**

Set values of double parameter or double attribute, associated with variables.

**Synopsis**

```
void Set(  
    string name,  
    VarArray vars,  
    double[] vals)
```

**Arguments**

**name:** name of double parameter or double attribute.

**vars:** array of interested variables.

**vals:** values of parameter or attribute.

**17.2.3.163 Model.Set()**

Set values of parameter or attribute, associated with constraints.

**Synopsis**

```
void Set(  
    string name,  
    Constraint[] constrs,  
    double[] vals)
```

**Arguments**

**name:** name of double parameter or double attribute.

**constrs:** a list of interested constraints.

**vals:** values of parameter or attribute.

**17.2.3.164 Model.Set()**

Set values of parameter or attribute, associated with constraints.

**Synopsis**

```
void Set(  
    string name,  
    ConstrArray constrs,  
    double[] vals)
```

**Arguments**

**name:** name of double parameter or double attribute.

**constrs:** array of interested constraints.

**vals:** values of parameter or attribute.

**17.2.3.165 Model.Set()**

Set values of parameter, associated with PSD constraints.

**Synopsis**

```
void Set(  
    string name,  
    PsdConstraint[] constrs,  
    double[] vals)
```

**Arguments**

**name:** name of double parameter.

**constrs:** a list of desired PSD constraints.

**vals:** array of values of parameter.

**17.2.3.166 Model.Set()**

Set values of parameter, associated with PSD constraints.

**Synopsis**

```
void Set(  
    string name,  
    PsdConstrArray constrs,  
    double[] vals)
```

**Arguments**

**name:** name of double parameter.

**constrs:** a list of desired PSD constraints.

**vals:** array of values of parameter.

**17.2.3.167 Model.SetBasis()**

Set column and row basis status to model.

**Synopsis**

```
void SetBasis(int[] colbasis, int[] rowbasis)
```

**Arguments**

**colbasis:** status of column basis.

**rowbasis:** status of row basis.

**17.2.3.168 Model.SetCoeff()**

Set the coefficient of a variable in a linear constraint.

**Synopsis**

```
void SetCoeff(  
    Constraint constr,  
    Var var,  
    double newVal)
```

**Arguments**

**constr:** The requested constraint.

**var:** The requested variable.

**newVal:** New coefficient.

**17.2.3.169 Model.SetDbiParam()**

Set value of a COPT double parameter.

**Synopsis**

```
void SetDbiParam(string param, double val)
```

**Arguments**

**param:** name of integer parameter.

**val:** double value.

**17.2.3.170 Model.SetIntParam()**

Set value of a COPT integer parameter.

**Synopsis**

```
void SetIntParam(string param, int val)
```

**Arguments**

**param:** name of integer parameter.

**val:** integer value.

**17.2.3.171 Model.SetLpSolution()**

Set LP solution.

**Synopsis**

```
void SetLpSolution(  
    double[] value,  
    double[] slack,  
    double[] rowDual,  
    double[] redCost)
```

**Arguments**

**value:** solution values.

**slack:** slack values.

**rowDual:** dual values.

**redCost:** reduced costs.

**17.2.3.172 Model.SetMipStart()**

Set initial values for variables of given number, starting from the first one.

**Synopsis**

```
void SetMipStart(int count, double[] vals)
```

**Arguments**

**count:** the number of variables to set.

**vals:** values of variables.

**17.2.3.173 Model.SetMipStart()**

Set initial value for the specified variable.

**Synopsis**

```
void SetMipStart(Var var, double val)
```

**Arguments**

**var**: an interested variable.

**val**: initial value of the variable.

**17.2.3.174 Model.SetMipStart()**

Set initial value for the specified variable.

**Synopsis**

```
void SetMipStart(Var[] vars, double[] vals)
```

**Arguments**

**vars**: a list of interested variables.

**vals**: initial values of the variables.

**17.2.3.175 Model.SetMipStart()**

Set initial value for the specified variable.

**Synopsis**

```
void SetMipStart(VarArray vars, double[] vals)
```

**Arguments**

**vars**: a list of interested variables.

**vals**: initial values of the variables.

**17.2.3.176 Model.SetObjConst()**

Set objective constant.

**Synopsis**

```
void SetObjConst(double constant)
```

**Arguments**

**constant**: constant value to set.

**17.2.3.177 Model.SetObjective()**

Set objective for model.

**Synopsis**

```
void SetObjective(Expr expr, int sense)
```

**Arguments**

**expr**: expression of the objective.

**sense**: optional, default value 0 does not change COPT sense

**17.2.3.178 Model.SetObjSense()**

Set objective sense for model.

**Synopsis**

```
void SetObjSense(int sense)
```

**Arguments**

**sense:** the objective sense.

**17.2.3.179 Model.SetPsdCoeff()**

Set the coefficient matrix of a PSD variable in a PSD constraint.

**Synopsis**

```
void SetPsdCoeff(  
    PsdConstraint constr,  
    PsdVar var,  
    SymMatrix mat)
```

**Arguments**

**constr:** The desired PSD constraint.

**var:** The desired PSD variable.

**mat:** new coefficient matrix.

**17.2.3.180 Model.SetPsdObjective()**

Set PSD objective for model.

**Synopsis**

```
void SetPsdObjective(PsdExpr expr, int sense)
```

**Arguments**

**expr:** PSD expression of the objective.

**sense:** optional, default value 0 does not change COPT sense.

**17.2.3.181 Model.SetQuadObjective()**

Set quadratic objective for model.

**Synopsis**

```
void SetQuadObjective(QuadExpr expr, int sense)
```

**Arguments**

**expr:** quadratic expression of the objective.

**sense:** default value 0 does not change COPT sense.

#### 17.2.3.182 **Model.SetSlackBasis()**

Set slack basis to model.

##### **Synopsis**

```
void SetSlackBasis()
```

#### 17.2.3.183 **Model.SetSolverLogFile()**

Set log file for COPT.

##### **Synopsis**

```
void SetSolverLogFile(string filename)
```

##### **Arguments**

filename: log file name.

#### 17.2.3.184 **Model.Solve()**

Solve the model as MIP.

##### **Synopsis**

```
void Solve()
```

#### 17.2.3.185 **Model.SolveLp()**

Solve the model as LP.

##### **Synopsis**

```
void SolveLp()
```

#### 17.2.3.186 **Model.Tune()**

Tune model.

##### **Synopsis**

```
void Tune()
```

#### 17.2.3.187 **Model.Write()**

Output problem, solution, basis, MIP start or modified COPT parameters to file.

##### **Synopsis**

```
void Write(string filename)
```

##### **Arguments**

filename: an output file name.

**17.2.3.188 Model.WriteBasis()**

Output optimal basis to a file of type '.bas'.

**Synopsis**

```
void WriteBasis(string filename)
```

**Arguments**

filename: an output file name.

**17.2.3.189 Model.WriteBin()**

Output problem to a file as COPT binary format.

**Synopsis**

```
void WriteBin(string filename)
```

**Arguments**

filename: an output file name.

**17.2.3.190 Model.WriteIIS()**

Output IIS to file.

**Synopsis**

```
void WriteIIS(string filename)
```

**Arguments**

filename: Output file name.

**17.2.3.191 Model.WriteLp()**

Output problem to a file as LP format.

**Synopsis**

```
void WriteLp(string filename)
```

**Arguments**

filename: an output file name.

**17.2.3.192 Model.WriteMps()**

Output problem to a file as MPS format.

**Synopsis**

```
void WriteMps(string filename)
```

**Arguments**

filename: an output file name.



**17.2.3.193 Model.WriteMpsStr()**

Output MPS problem to problem buffer.

**Synopsis**

```
ProbBuffer WriteMpsStr()
```

**Return**

problem buffer for string of MPS problem.

**17.2.3.194 Model.WriteMst()**

Output MIP start information to a file of type '.mst'.

**Synopsis**

```
void WriteMst(string filename)
```

**Arguments**

filename: an output file name.

**17.2.3.195 Model.WriteParam()**

Output modified COPT parameters to a file of type '.par'.

**Synopsis**

```
void WriteParam(string filename)
```

**Arguments**

filename: an output file name.

**17.2.3.196 Model.WritePoolSol()**

Output selected pool solution to a file of type '.sol'.

**Synopsis**

```
void WritePoolSol(int idx, string filename)
```

**Arguments**

idx: index of pool solution.

filename: an output file name.

**17.2.3.197 Model.WriteRelax()**

Output feasibility relaxation problem to file.

**Synopsis**

```
void WriteRelax(string filename)
```

**Arguments**

filename: Output file name.

#### 17.2.3.198 Model.WriteSol()

Output solution to a file of type '.sol'.

##### Synopsis

```
void WriteSol(string filename)
```

##### Arguments

filename: an output file name.

#### 17.2.3.199 Model.WriteTuneParam()

Output specified tuned parameters to a file of type '.par'.

##### Synopsis

```
void WriteTuneParam(int idx, string filename)
```

##### Arguments

idx: Index of tuned parameters.

filename: Output file name.

### 17.2.4 Var

COPT variable object. Variables are always associated with a particular model. User creates a variable object by adding a variable to a model, rather than by using constructor of Var class.

#### 17.2.4.1 Var.Get()

Get attribute value of the variable. Support "Value", "RedCost", "LB", "UB", and "Obj" attributes.

##### Synopsis

```
double Get(string attr)
```

##### Arguments

attr: attribute name.

##### Return

attribute value.

#### 17.2.4.2 Var.GetBasis()

Get basis status of the variable.

##### Synopsis

```
int GetBasis()
```

##### Return

Basis status.

#### 17.2.4.3 Var.GetIdx()

Get index of the variable.

##### Synopsis

```
int GetIdx()
```

##### Return

variable index.

#### 17.2.4.4 Var.GetLowerIIS()

Get IIS status for lower bound of the variable.

##### Synopsis

```
int GetLowerIIS()
```

##### Return

IIS status.

#### 17.2.4.5 Var.GetName()

Get name of the variable.

##### Synopsis

```
string GetName()
```

##### Return

variable name.

#### 17.2.4.6 Var.GetType()

Get type of the variable.

##### Synopsis

```
char GetType()
```

##### Return

variable type.

#### 17.2.4.7 Var.GetUpperIIS()

Get IIS status for upper bound of the variable.

##### Synopsis

```
int GetUpperIIS()
```

##### Return

IIS status.

#### 17.2.4.8 Var.Remove()

Remove variable from model.

##### Synopsis

```
void Remove()
```

#### 17.2.4.9 Var.Set()

Set attribute value of the variable. Support “LB”, “UB” and “Obj” attributes.

##### Synopsis

```
void Set(string attr, double val)
```

##### Arguments

**attr**: attribute name.

**val**: new value.

#### 17.2.4.10 Var.SetName()

Set name of the variable.

##### Synopsis

```
void SetName(string name)
```

##### Arguments

**name**: variable name.

#### 17.2.4.11 Var.SetType()

Set type of the variable.

##### Synopsis

```
void SetType(char vtype)
```

##### Arguments

**vtype**: variable type.

### 17.2.5 VarArray

COPT variable array object. To store and access a set of C# *Var* objects, Cardinal Optimizer provides C# *VarArray* class, which defines the following methods.

#### 17.2.5.1 VarArray.VarArray()

Constructor of vararray.

##### Synopsis

```
VarArray()
```

#### **17.2.5.2 VarArray.GetVar()**

Get idx-th variable object.

##### **Synopsis**

```
Var GetVar(int idx)
```

##### **Arguments**

idx: index of the variable.

##### **Return**

variable object with index idx.

#### **17.2.5.3 VarArray.PushBack()**

Add a variable object to variable array.

##### **Synopsis**

```
void PushBack(Var var)
```

##### **Arguments**

var: a variable object.

#### **17.2.5.4 VarArray.Size()**

Get the number of variable objects.

##### **Synopsis**

```
int Size()
```

##### **Return**

number of variable objects.

### **17.2.6 Expr**

COPT linear expression object. A linear expression consists of a constant term, a list of terms of variables and associated coefficients. Linear expressions are used to build constraints.

#### **17.2.6.1 Expr.Expr()**

Constructor of a constant linear expression with default constant value 0.

##### **Synopsis**

```
Expr(double constant)
```

##### **Arguments**

constant: optional, constant value in expression object.

#### 17.2.6.2 Expr.Expr()

Constructor of a linear expression with one term.

##### Synopsis

```
Expr(Var var, double coeff)
```

##### Arguments

**var**: variable for the added term.

**coeff**: coefficient for the added term with default value 1.0.

#### 17.2.6.3 Expr.AddConstant()

Add extra constant to the expression.

##### Synopsis

```
void AddConstant(double constant)
```

##### Arguments

**constant**: delta value to be added to expression constant.

#### 17.2.6.4 Expr.AddExpr()

Add an expression to self.

##### Synopsis

```
void AddExpr(Expr expr, double mult)
```

##### Arguments

**expr**: expression to be added.

**mult**: multiply constant.

#### 17.2.6.5 Expr.AddTerm()

Add a term to expression object.

##### Synopsis

```
void AddTerm(Var var, double coeff)
```

##### Arguments

**var**: a variable for new term.

**coeff**: coefficient for new term.

#### 17.2.6.6 Expr.AddTerms()

Add terms to expression object.

##### Synopsis

```
void AddTerms(Var[] vars, double coeff)
```

##### Arguments

**vars**: variables for added terms.

**coeff**: coefficient array for added terms with default value 1.0.

**17.2.6.7 Expr.AddTerms()**

Add terms to expression object.

**Synopsis**

```
void AddTerms(Var[] vars, double[] coeffs)
```

**Arguments**

**vars:** variables for added terms.

**coeffs:** coefficients array for added terms.

**17.2.6.8 Expr.AddTerms()**

Add terms to expression object.

**Synopsis**

```
void AddTerms(VarArray vars, double coeff)
```

**Arguments**

**vars:** variables for added terms.

**coeff:** coefficient array for added terms with default value 1.0.

**17.2.6.9 Expr.AddTerms()**

Add terms to expression object.

**Synopsis**

```
void AddTerms(VarArray vars, double[] coeffs)
```

**Arguments**

**vars:** variables for added terms.

**coeffs:** coefficients array for added terms.

**17.2.6.10 Expr.Clone()**

Deep copy linear expression object.

**Synopsis**

```
Expr Clone()
```

**Return**

cloned linear expression object.

**17.2.6.11 Expr.GetCoeff()**

Get coefficient from the i-th term in expression.

**Synopsis**

```
double GetCoeff(int i)
```

**Arguments**

**i:** index of the term.

**Return**

coefficient of the i-th term in expression object.

#### 17.2.6.12 Expr.GetConstant()

Get constant in expression.

##### Synopsis

```
double GetConstant()
```

##### Return

constant in expression.

#### 17.2.6.13 Expr.GetVar()

Get variable from the i-th term in expression.

##### Synopsis

```
Var GetVar(int i)
```

##### Arguments

i: index of the term.

##### Return

variable of the i-th term in expression object.

#### 17.2.6.14 Expr.Remove()

Remove idx-th term from expression object.

##### Synopsis

```
void Remove(int idx)
```

##### Arguments

idx: index of the term to be removed.

#### 17.2.6.15 Expr.Remove()

Remove the term associated with variable from expression.

##### Synopsis

```
void Remove(Var var)
```

##### Arguments

var: a variable whose term should be removed.



#### **17.2.6.16 Expr.SetCoeff()**

Set coefficient for the i-th term in expression.

##### **Synopsis**

```
void SetCoeff(int i, double val)
```

##### **Arguments**

**i**: index of the term.

**val**: coefficient of the term.

#### **17.2.6.17 Expr.SetConstant()**

Set constant for the expression.

##### **Synopsis**

```
void SetConstant(double constant)
```

##### **Arguments**

**constant**: the value of the constant.

#### **17.2.6.18 Expr.Size()**

Get number of terms in expression.

##### **Synopsis**

```
long Size()
```

##### **Return**

number of terms.

### **17.2.7 Constraint**

COPT constraint object. Constraints are always associated with a particular model. User creates a constraint object by adding a constraint to a model, rather than by using constructor of Constraint class.

#### **17.2.7.1 Constraint.Get()**

Get attribute value of the constraint. Support “Dual”, “Slack”, “LB”, “UB” attributes.

##### **Synopsis**

```
double Get(string attr)
```

##### **Arguments**

**attr**: name of the attribute being queried.

##### **Return**

attribute value.

#### 17.2.7.2 **Constraint.GetBasis()**

Get basis status of this constraint.

##### **Synopsis**

```
int GetBasis()
```

##### **Return**

basis status.

#### 17.2.7.3 **Constraint.GetIdx()**

Get index of the constraint.

##### **Synopsis**

```
int GetIdx()
```

##### **Return**

the index of the constraint.

#### 17.2.7.4 **Constraint.GetLowerIIS()**

Get IIS status for lower bound of the constraint.

##### **Synopsis**

```
int GetLowerIIS()
```

##### **Return**

IIS status.

#### 17.2.7.5 **Constraint.GetName()**

Get name of the constraint.

##### **Synopsis**

```
string GetName()
```

##### **Return**

the name of the constraint.

#### 17.2.7.6 **Constraint.GetUpperIIS()**

Get IIS status for upper bound of the constraint.

##### **Synopsis**

```
int GetUpperIIS()
```

##### **Return**

IIS status.

#### **17.2.7.7 Constraint.Remove()**

Remove this constraint from model.

##### **Synopsis**

```
void Remove()
```

#### **17.2.7.8 Constraint.Set()**

Set attribute value of the constraint. Support “LB” and “UB” attributes.

##### **Synopsis**

```
void Set(string attr, double val)
```

##### **Arguments**

**attr**: name of the attribute.

**val**: new value.

#### **17.2.7.9 Constraint.SetName()**

Set name for the constraint.

##### **Synopsis**

```
void SetName(string name)
```

##### **Arguments**

**name**: the name to set.

### **17.2.8 ConstrArray**

COPT constraint array object. To store and access a set of C# *Constraint* objects, Cardinal Optimizer provides C# *ConstrArray* class, which defines the following methods.

#### **17.2.8.1 ConstrArray.ConstrArray()**

Constructor of constrarray object.

##### **Synopsis**

```
ConstrArray()
```

#### **17.2.8.2 ConstrArray.GetConstr()**

Get idx-th constraint object.

##### **Synopsis**

```
Constraint GetConstr(int idx)
```

##### **Arguments**

**idx**: index of the constraint.

##### **Return**

constraint object with index idx.

#### 17.2.8.3 ConstrArray.PushBack()

Add a constraint object to constraint array.

##### Synopsis

```
void PushBack(Constraint constr)
```

##### Arguments

**constr:** a constraint object.

#### 17.2.8.4 ConstrArray.Size()

Get the number of constraint objects.

##### Synopsis

```
int Size()
```

##### Return

number of constraint objects.

### 17.2.9 ConstrBuilder

COPT constraint builder object. To help building a constraint, given a linear expression, constraint sense and right-hand side value, Cardinal Optimizer provides C# ConstrBuilder class, which defines the following methods.

#### 17.2.9.1 ConstrBuilder.ConstrBuilder()

Constructor of constrbuilder object.

##### Synopsis

```
ConstrBuilder()
```

#### 17.2.9.2 ConstrBuilder.GetExpr()

Get expression associated with constraint.

##### Synopsis

```
Expr GetExpr()
```

##### Return

expression object.

#### 17.2.9.3 ConstrBuilder.GetRange()

Get range from lower bound to upper bound of range constraint.

##### Synopsis

```
double GetRange()
```

##### Return

length from lower bound to upper bound of the constraint.

#### 17.2.9.4 ConstrBuilder.GetSense()

Get sense associated with constraint.

##### Synopsis

```
char GetSense()
```

##### Return

constraint sense.

#### 17.2.9.5 ConstrBuilder.Set()

Set detail of a constraint to its builder object.

##### Synopsis

```
void Set(  
    Expr expr,  
    char sense,  
    double rhs)
```

##### Arguments

**expr**: expression object at one side of the constraint

**sense**: constraint sense other than COPT\_RANGE.

**rhs**: constant of right side of the constraint.

#### 17.2.9.6 ConstrBuilder.SetRange()

Set a range constraint to its builder.

##### Synopsis

```
void SetRange(Expr expr, double range)
```

##### Arguments

**expr**: expression object, whose constant is negative upper bound.

**range**: length from lower bound to upper bound of the constraint. Must greater than 0.

#### 17.2.10 ConstrBuilderArray

COPT constraint builder array object. To store and access a set of C# *ConstrBuilder* objects, Cardinal Optimizer provides C# *ConstrBuilderArray* class, which defines the following methods.

#### 17.2.10.1 ConstrBuilderArray.ConstrBuilderArray()

Constructor of constrbuilderarray object.

##### Synopsis

```
ConstrBuilderArray()
```

#### 17.2.10.2 ConstrBuilderArray.GetBuilder()

Get idx-th constraint builder object.

##### Synopsis

```
ConstrBuilder GetBuilder(int idx)
```

##### Arguments

idx: index of the constraint builder.

##### Return

constraint builder object with index idx.

#### 17.2.10.3 ConstrBuilderArray.PushBack()

Add a constraint builder object to constraint builder array.

##### Synopsis

```
void PushBack(ConstrBuilder builder)
```

##### Arguments

builder: a constraint builder object.

#### 17.2.10.4 ConstrBuilderArray.Size()

Get the number of constraint builder objects.

##### Synopsis

```
int Size()
```

##### Return

number of constraint builder objects.

### 17.2.11 Column

COPT column object. A column consists of a list of constraints and associated coefficients. Columns are used to represent the set of constraints in which a variable participates, and the associated coefficients.

#### **17.2.11.1 Column.Column()**

Constructor of column.

##### **Synopsis**

```
Column()
```

#### **17.2.11.2 Column.AddColumn()**

Add a column to self.

##### **Synopsis**

```
void AddColumn(Column col, double mult)
```

##### **Arguments**

col: column object to be added.

mult: multiply constant.

#### **17.2.11.3 Column.AddTerm()**

Add a term to column object.

##### **Synopsis**

```
void AddTerm(Constraint constr, double coeff)
```

##### **Arguments**

constr: a constraint for new term.

coeff: coefficient for new term.

#### **17.2.11.4 Column.AddTerms()**

Add terms to column object.

##### **Synopsis**

```
void AddTerms(Constraint[] constrs, double[] coeffs)
```

##### **Arguments**

constrs: constraints for added terms.

coeffs: coefficients for added terms.

#### **17.2.11.5 Column.AddTerms()**

Add terms to column object.

##### **Synopsis**

```
void AddTerms(ConstrArray constrs, double coeff)
```

##### **Arguments**

constrs: constraints for added terms.

coeff: coefficient for added terms,default value is 1.

#### 17.2.11.6 Column.AddTerms()

Add terms to column object.

##### Synopsis

```
void AddTerms(ConstrArray constrs, double[] coeffs)
```

##### Arguments

**constrs:** constraints for added terms.

**coeffs:** coefficients for added terms.

#### 17.2.11.7 Column.AddTerms()

Add terms to column object.

##### Synopsis

```
void AddTerms(Constraint[] constrs, double coeff)
```

##### Arguments

**constrs:** constraints for added terms.

**coeff:** coefficient for added terms,default value is 1.

#### 17.2.11.8 Column.Clear()

Clear all terms.

##### Synopsis

```
void Clear()
```

#### 17.2.11.9 Column.Clone()

Deep copy column object.

##### Synopsis

```
Column Clone()
```

##### Return

cloned column object.

#### 17.2.11.10 Column.GetCoeff()

Get coefficient from the i-th term in column object.

##### Synopsis

```
double GetCoeff(int i)
```

##### Arguments

**i:** index of the term.

##### Return

coefficient of the i-th term in column object.



#### 17.2.11.11 Column.GetConstr()

Get constraint from the i-th term in column object.

##### Synopsis

```
Constraint GetConstr(int i)
```

##### Arguments

i: index of the term.

##### Return

constraint of the i-th term in column object.

#### 17.2.11.12 Column.Remove()

Remove idx-th term from column object.

##### Synopsis

```
void Remove(int idx)
```

##### Arguments

idx: index of the term to be removed.

#### 17.2.11.13 Column.Remove()

Remove the term associated with constraint from column object.

##### Synopsis

```
void Remove(Constraint constr)
```

##### Arguments

constr: a constraint whose term should be removed.

#### 17.2.11.14 Column.Size()

Get number of terms in column object.

##### Synopsis

```
int Size()
```

##### Return

number of terms.

### 17.2.12 ColumnArray

COPT column array object. To store and access a set of C# *Column* objects, Cardinal Optimizer provides C# *ColumnArray* class, which defines the following methods.

#### 17.2.12.1 ColumnArray.ColumnArray()

Constructor of columnarray object.

##### Synopsis

```
ColumnArray()
```

#### 17.2.12.2 ColumnArray.Clear()

Clear all column objects.

##### Synopsis

```
void Clear()
```

#### 17.2.12.3 ColumnArray.GetColumn()

Get idx-th column object.

##### Synopsis

```
Column GetColumn(int idx)
```

##### Arguments

idx: index of the column.

##### Return

column object with index idx.

#### 17.2.12.4 ColumnArray.PushBack()

Add a column object to column array.

##### Synopsis

```
void PushBack(Column col)
```

##### Arguments

col: a column object.

#### 17.2.12.5 ColumnArray.Size()

Get the number of column objects.

##### Synopsis

```
int Size()
```

##### Return

number of column objects.

### 17.2.13 Sos

COPT SOS constraint object. SOS constraints are always associated with a particular model. User creates an SOS constraint object by adding an SOS constraint to a model, rather than by using constructor of Sos class.

An SOS constraint can be type 1 or 2 (COPT\_SOS\_TYPE1 or COPT\_SOS\_TYPE2).

#### 17.2.13.1 Sos.GetIdx()

Get the index of SOS constarint.

**Synopsis**

```
int GetIdx()
```

**Return**

index of SOS constraint.

#### 17.2.13.2 Sos.GetIIS()

Get IIS status of the SOS constraint.

**Synopsis**

```
int GetIIS()
```

**Return**

IIS status.

#### 17.2.13.3 Sos.Remove()

Remove the SOS constraint from model.

**Synopsis**

```
void Remove()
```

### 17.2.14 SosArray

COPT SOS constraint array object. To store and access a set of C# *Sos* objects, Cardinal Optimizer provides C# SosArray class, which defines the following methods.

#### 17.2.14.1 SosArray.SosArray()

Constructor of sosarray object.

**Synopsis**

```
SosArray()
```

#### 17.2.14.2 SosArray.PushBack()

Add a SOS constraint object to SOS constraint array.

##### Synopsis

```
void PushBack(Sos sos)
```

##### Arguments

sos: a SOS constraint object.

#### 17.2.14.3 SosArray.Size()

Get the number of SOS constraint objects.

##### Synopsis

```
int Size()
```

##### Return

number of SOS constraint objects.

### 17.2.15 SosBuilder

COPT SOS constraint builder object. To help building an SOS constraint, given the SOS type, a set of variables and associated weights, Cardinal Optimizer provides C# SosBuilder class, which defines the following methods.

#### 17.2.15.1 SosBuilder.SosBuilder()

Constructor of sosbuilder object.

##### Synopsis

```
SosBuilder()
```

#### 17.2.15.2 SosBuilder.GetSize()

Get number of terms in SOS constraint.

##### Synopsis

```
int GetSize()
```

##### Return

number of terms.

#### 17.2.15.3 SosBuilder.GetType()

Get type of SOS constraint.

##### Synopsis

```
int GetType()
```

##### Return

type of SOS constraint.

#### **17.2.15.4 SosBuilder.GetVar()**

Get variable from the idx-th term in SOS constraint.

##### **Synopsis**

```
Var GetVar(int idx)
```

##### **Arguments**

idx: index of the term.

##### **Return**

variable of the idx-th term in SOS constraint.

#### **17.2.15.5 SosBuilder.GetWeight()**

Get weight from the idx-th term in SOS constraint.

##### **Synopsis**

```
double GetWeight(int idx)
```

##### **Arguments**

idx: index of the term.

##### **Return**

weight of the idx-th term in SOS constraint.

#### **17.2.15.6 SosBuilder.GetWeights()**

Get weights of all terms in SOS constraint.

##### **Synopsis**

```
double[] GetWeights()
```

##### **Return**

array of weights.

#### **17.2.15.7 SosBuilder.Set()**

Set variables and weights of SOS constraint.

##### **Synopsis**

```
void Set(  
    VarArray vars,  
    double[] weights,  
    int type)
```

##### **Arguments**

vars: variable array object.

weights: pointer to array of weights.

type: type of SOS constraint.

### 17.2.16 SosBuilderArray

COPT SOS constraint builder array object. To store and access a set of C# *SosBuilder* objects, Cardinal Optimizer provides C# *SosBuilderArray* class, which defines the following methods.

#### 17.2.16.1 SosBuilderArray.SosBuilderArray()

Constructor of *sosbuilderarray* object.

##### Synopsis

```
SosBuilderArray()
```

#### 17.2.16.2 SosBuilderArray.GetBuilder()

Get *idx*-th SOS constraint builder object.

##### Synopsis

```
SosBuilder GetBuilder(int idx)
```

##### Arguments

*idx*: index of the SOS constraint builder.

##### Return

SOS constraint builder object with index *idx*.

#### 17.2.16.3 SosBuilderArray.PushBack()

Add a SOS constraint builder object to SOS constraint builder array.

##### Synopsis

```
void PushBack(SosBuilder builder)
```

##### Arguments

*builder*: a SOS constraint builder object.

#### 17.2.16.4 SosBuilderArray.Size()

Get the number of SOS constraint builder objects.

##### Synopsis

```
int Size()
```

##### Return

number of SOS constraint builder objects.

### 17.2.17 GenConstr

COPT general constraint object. General constraints are always associated with a particular model. User creates a general constraint object by adding a general constraint to a model, rather than by using constructor of GenConstr class.

#### 17.2.17.1 GenConstr.GetIdx()

Get the index of the general constraint.

**Synopsis**

```
int GetIdx()
```

**Return**

index of the general constraint.

#### 17.2.17.2 GenConstr.GetIIS()

Get IIS status of the general constraint.

**Synopsis**

```
int GetIIS()
```

**Return**

IIS status.

#### 17.2.17.3 GenConstr.Remove()

Remove the general constraint from model.

**Synopsis**

```
void Remove()
```

### 17.2.18 GenConstrArray

COPT general constraint array object. To store and access a set of C# *GenConstr* objects, Cardinal Optimizer provides C# GenConstrArray class, which defines the following methods.

#### 17.2.18.1 GenConstrArray.GenConstrArray()

Constructor of genconstrarray.

**Synopsis**

```
GenConstrArray()
```

#### 17.2.18.2 **GenConstrArray.GetGenConstr()**

Get idx-th general constraint object.

##### **Synopsis**

```
GenConstr GetGenConstr(int idx)
```

##### **Arguments**

idx: index of the general constraint.

##### **Return**

general constraint object with index idx.

#### 17.2.18.3 **GenConstrArray.PushBack()**

Add a general constraint object to general constraint array.

##### **Synopsis**

```
void PushBack(GenConstr genconstr)
```

##### **Arguments**

genconstr: a general constraint object.

#### 17.2.18.4 **GenConstrArray.Size()**

Get the number of general constraint objects.

##### **Synopsis**

```
int Size()
```

##### **Return**

number of general constraint objects.

### 17.2.19 **GenConstrBuilder**

COPT general constraint builder object. To help building a general constraint, given a binary variable and associated value, a linear expression and constraint sense, Cardinal Optimizer provides C# GenConstrBuilder class, which defines the following methods.

#### 17.2.19.1 **GenConstrBuilder.GenConstrBuilder()**

Constructor of genconstrbuilder.

##### **Synopsis**

```
GenConstrBuilder()
```



#### 17.2.19.2 GenConstrBuilder.GetBinVal()

Get binary value associated with general constraint.

##### Synopsis

```
int GetBinVal()
```

##### Return

binary value.

#### 17.2.19.3 GenConstrBuilder.GetBinVar()

Get binary variable associated with general constraint.

##### Synopsis

```
Var GetBinVar()
```

##### Return

binary variable object.

#### 17.2.19.4 GenConstrBuilder.GetExpr()

Get expression associated with general constraint.

##### Synopsis

```
Expr GetExpr()
```

##### Return

expression object.

#### 17.2.19.5 GenConstrBuilder.GetSense()

Get sense associated with general constraint.

##### Synopsis

```
char GetSense()
```

##### Return

constraint sense.

#### 17.2.19.6 GenConstrBuilder.Set()

Set binary variable, binary value, expression and sense of general constraint.

##### Synopsis

```
void Set(  
    Var binvar,  
    int binval,  
    Expr expr,  
    char sense)
```

##### Arguments

**binvar**: binary variable.  
**binval**: binary value.  
**expr**: expression object.  
**sense**: general constraint sense.

### 17.2.20 GenConstrBuilderArray

COPT general constraint builder array object. To store and access a set of C# *GenConstrBuilder* objects, Cardinal Optimizer provides C# *GenConstrBuilderArray* class, which defines the following methods.

#### 17.2.20.1 GenConstrBuilderArray.GenConstrBuilderArray()

Constructor of *genconstrbuilderarray*.

##### Synopsis

```
GenConstrBuilderArray()
```

#### 17.2.20.2 GenConstrBuilderArray.GetBuilder()

Get *idx*-th general constraint builder object.

##### Synopsis

```
GenConstrBuilder GetBuilder(int idx)
```

##### Arguments

*idx*: index of the general constraint builder.

##### Return

general constraint builder object with index *idx*.

#### 17.2.20.3 GenConstrBuilderArray.PushBack()

Add a general constraint builder object to general constraint builder array.

##### Synopsis

```
void PushBack(GenConstrBuilder builder)
```

##### Arguments

*builder*: a general constraint builder object.

#### 17.2.20.4 GenConstrBuilderArray.Size()

Get the number of general constraint builder objects.

##### Synopsis

```
int Size()
```

##### Return

number of general constraint builder objects.

### 17.2.21 Cone

COPT cone constraint object. Cone constraints are always associated with a particular model. User creates a cone constraint object by adding a cone constraint to a model, rather than by using constructor of Cone class.

A cone constraint can be regular or rotated (COPT\_CONE\_QUAD or COPT\_CONE\_RQUAD).

#### 17.2.21.1 Cone.GetIdx()

Get the index of a cone constarint.

##### Synopsis

```
int GetIdx()
```

##### Return

index of the cone constraint.

#### 17.2.21.2 Cone.Remove()

Remove the cone constraint from model.

##### Synopsis

```
void Remove()
```

### 17.2.22 ConeArray

COPT cone constraint array object. To store and access a set of C# *Cone* objects, Cardinal Optimizer provides C# ConeArray class, which defines the following methods.

#### 17.2.22.1 ConeArray.ConeArray()

Constructor of conearray object.

##### Synopsis

```
ConeArray()
```

#### 17.2.22.2 ConeArray.PushBack()

Add a cone constraint object to cone constraint array.

##### Synopsis

```
void PushBack(Cone cone)
```

##### Arguments

cone: a cone constraint object.

### 17.2.22.3 ConeArray.Size()

Get the number of cone constraint objects.

#### Synopsis

```
int Size()
```

#### Return

number of cone constraint objects.

## 17.2.23 ConeBuilder

COPT cone constraint builder object. To help building a cone constraint, given the cone type and a set of variables, Cardinal Optimizer provides C# ConeBuilder class, which defines the following methods.

### 17.2.23.1 ConeBuilder.ConeBuilder()

Constructor of conebuilder object.

#### Synopsis

```
ConeBuilder()
```

### 17.2.23.2 ConeBuilder.GetSize()

Get number of variables in a cone constraint.

#### Synopsis

```
int GetSize()
```

#### Return

number of variables.

### 17.2.23.3 ConeBuilder.GetType()

Get type of a cone constraint.

#### Synopsis

```
int GetType()
```

#### Return

type of the cone constraint.

### 17.2.23.4 ConeBuilder.GetVar()

Get i-th variable in a cone constraint.

#### Synopsis

```
Var GetVar(int idx)
```

#### Arguments

idx: index of vars.

#### Return

the i-th variable in a cone constraint.

#### 17.2.23.5 ConeBuilder.Set()

Set variables and type of a cone constraint.

##### Synopsis

```
void Set(VarArray vars, int type)
```

##### Arguments

**vars:** variable array object.

**type:** type of a cone constraint.

#### 17.2.24 ConeBuilderArray

COPT cone constraint builder array object. To store and access a set of C# *ConeBuilder* objects, Cardinal Optimizer provides C# *ConeBuilderArray* class, which defines the following methods.

##### 17.2.24.1 ConeBuilderArray.ConeBuilderArray()

Constructor of conebuilderarray object.

##### Synopsis

```
ConeBuilderArray()
```

##### 17.2.24.2 ConeBuilderArray.GetBuilder()

Get idx-th cone constraint builder object.

##### Synopsis

```
ConeBuilder GetBuilder(int idx)
```

##### Arguments

**idx:** index of the cone constraint builder.

##### Return

cone constraint builder object with index idx.

##### 17.2.24.3 ConeBuilderArray.PushBack()

Add a cone constraint builder object to cone constraint builder array.

##### Synopsis

```
void PushBack(ConeBuilder builder)
```

##### Arguments

**builder:** a cone constraint builder object.

#### 17.2.24.4 ConeBuilderArray.Size()

Get the number of cone constraint builder objects.

##### Synopsis

```
int Size()
```

##### Return

number of cone constraint builder objects.

### 17.2.25 QuadExpr

COPT quadratic expression object. A quadratic expression consists of a linear expression, a list of variable pairs and associated coefficients of quadratic terms. Quadratic expressions are used to build quadratic constraints and objectives.

#### 17.2.25.1 QuadExpr.QuadExpr()

Constructor of a quadratic expression with default constant value 0.

##### Synopsis

```
QuadExpr(double constant)
```

##### Arguments

constant: optional, constant value in quadratic expression object.

#### 17.2.25.2 QuadExpr.QuadExpr()

Constructor of a quadratic expression with one linear term.

##### Synopsis

```
QuadExpr(Var var, double coeff)
```

##### Arguments

var: variable of the added linear term.

coeff: coefficient for the added linear term with default value 1.0.

#### 17.2.25.3 QuadExpr.QuadExpr()

Constructor of a quadratic expression with a linear expression.

##### Synopsis

```
QuadExpr(Expr expr)
```

##### Arguments

expr: linear expression added to the quadratic expression.

#### **17.2.25.4 QuadExpr.QuadExpr()**

Constructor of a quadratic expression with two linear expression.

##### **Synopsis**

```
QuadExpr(Expr expr, Var var)
```

##### **Arguments**

**expr:** one linear expression.

**var:** another variable.

#### **17.2.25.5 QuadExpr.QuadExpr()**

Constructor of a quadratic expression with two linear expression.

##### **Synopsis**

```
QuadExpr(Expr left, Expr right)
```

##### **Arguments**

**left:** one linear expression.

**right:** another linear expression.

#### **17.2.25.6 QuadExpr.AddConstant()**

Add a constant to the quadratic expression.

##### **Synopsis**

```
void AddConstant(double constant)
```

##### **Arguments**

**constant:** value to be added.

#### **17.2.25.7 QuadExpr.AddLinExpr()**

Add a linear expression to self.

##### **Synopsis**

```
void AddLinExpr(Expr expr)
```

##### **Arguments**

**expr:** linear expression to be added.

#### **17.2.25.8 QuadExpr.AddLinExpr()**

Add a linear expression to self.

##### **Synopsis**

```
void AddLinExpr(Expr expr, double mult)
```

##### **Arguments**

**expr:** linear expression to be added.

**mult:** multiplier constant.

#### 17.2.25.9 QuadExpr.AddQuadExpr()

Add a quadratic expression to self.

##### Synopsis

```
void AddQuadExpr(QuadExpr expr)
```

##### Arguments

expr: quadratic expression to be added.

#### 17.2.25.10 QuadExpr.AddQuadExpr()

Add a quadratic expression to self.

##### Synopsis

```
void AddQuadExpr(QuadExpr expr, double mult)
```

##### Arguments

expr: quadratic expression to be added.

mult: multiplier constant.

#### 17.2.25.11 QuadExpr.AddTerm()

Add a term to quadratic expression object.

##### Synopsis

```
void AddTerm(Var var, double coeff)
```

##### Arguments

var: a variable of new term.

coeff: coefficient of new term.

#### 17.2.25.12 QuadExpr.AddTerm()

Add a quadratic term to expression object.

##### Synopsis

```
void AddTerm(  
    Var var1,  
    Var var2,  
    double coeff)
```

##### Arguments

var1: first variable of new quadratic term.

var2: second variable of new quadratic term.

coeff: coefficient of new quadratic term.



**17.2.25.13 QuadExpr.AddTerms()**

Add linear terms to quadratic expression object.

**Synopsis**

```
void AddTerms(Var[] vars, double coeff)
```

**Arguments**

**vars:** variables of added linear terms.

**coeff:** one coefficient for added linear terms.

**17.2.25.14 QuadExpr.AddTerms()**

Add linear terms to quadratic expression object.

**Synopsis**

```
void AddTerms(Var[] vars, double[] coeffs)
```

**Arguments**

**vars:** variables of added linear terms.

**coeffs:** coefficients of added linear terms.

**17.2.25.15 QuadExpr.AddTerms()**

Add linear terms to quadratic expression object.

**Synopsis**

```
void AddTerms(VarArray vars, double coeff)
```

**Arguments**

**vars:** variables of added linear terms.

**coeff:** one coefficient for added linear terms.

**17.2.25.16 QuadExpr.AddTerms()**

Add linear terms to quadratic expression object.

**Synopsis**

```
void AddTerms(VarArray vars, double[] coeffs)
```

**Arguments**

**vars:** variables of added terms.

**coeffs:** coefficients of added terms.

**17.2.25.17 QuadExpr.AddTerms()**

Add quadratic terms to expression object.

**Synopsis**

```
void AddTerms(  
    VarArray vars1,  
    VarArray vars2,  
    double[] coeffs)
```

**Arguments**

**vars1**: first set of variables for added quadratic terms.

**vars2**: second set of variables for added quadratic terms.

**coeffs**: coefficient array for added quadratic terms.

**17.2.25.18 QuadExpr.AddTerms()**

Add quadratic terms to expression object.

**Synopsis**

```
void AddTerms(  
    Var[] vars1,  
    Var[] vars2,  
    double[] coeffs)
```

**Arguments**

**vars1**: first set of variables for added quadratic terms.

**vars2**: second set of variables for added quadratic terms.

**coeffs**: coefficient array for added quadratic terms.

**17.2.25.19 QuadExpr.Clone()**

Deep copy quadratic expression object.

**Synopsis**

```
QuadExpr Clone()
```

**Return**

cloned quadratic expression object.

**17.2.25.20 QuadExpr.Evaluate()**

evaluate quadratic expression after solving

**Synopsis**

```
double Evaluate()
```

**Return**

value of quadratic expression

**17.2.25.21 QuadExpr.GetCoeff()**

Get coefficient from the i-th term in quadratic expression.

**Synopsis**

```
double GetCoeff(int i)
```

**Arguments**

i: index of the term.

**Return**

coefficient of the i-th term in quadratic expression object.

**17.2.25.22 QuadExpr.GetConstant()**

Get constant in quadratic expression.

**Synopsis**

```
double GetConstant()
```

**Return**

constant in quadratic expression.

**17.2.25.23 QuadExpr.GetLinExpr()**

Get linear expression in quadratic expression.

**Synopsis**

```
Expr GetLinExpr()
```

**Return**

linear expression object.

**17.2.25.24 QuadExpr.GetVar1()**

Get first variable from the i-th term in quadratic expression.

**Synopsis**

```
Var GetVar1(int i)
```

**Arguments**

i: index of the term.

**Return**

first variable of the i-th term in quadratic expression object.

**17.2.25.25 QuadExpr.GetVar2()**

Get second variable from the i-th term in quadratic expression.

**Synopsis**

```
Var GetVar2(int i)
```

**Arguments**

i: index of the term.

**Return**

second variable of the i-th term in quadratic expression object.

**17.2.25.26 QuadExpr.Remove()**

Remove idx-th term from quadratic expression object.

**Synopsis**

```
void Remove(int idx)
```

**Arguments**

idx: index of the term to be removed.

**17.2.25.27 QuadExpr.Remove()**

Remove the term associated with variable from quadratic expression.

**Synopsis**

```
void Remove(Var var)
```

**Arguments**

var: a variable whose term should be removed.

**17.2.25.28 QuadExpr.SetCoeff()**

Set coefficient of the i-th term in quadratic expression.

**Synopsis**

```
void SetCoeff(int i, double val)
```

**Arguments**

i: index of the quadratic term.

val: coefficient of the term.

**17.2.25.29 QuadExpr.SetConstant()**

Set constant for the quadratic expression.

**Synopsis**

```
void SetConstant(double constant)
```

**Arguments**

constant: the value of the constant.

#### **17.2.25.30 QuadExpr.Size()**

Get number of terms in quadratic expression.

##### **Synopsis**

```
long Size()
```

##### **Return**

number of quadratic terms.

#### **17.2.26 QConstraint**

COPT quadratic constraint object. Quadratic constraints are always associated with a particular model. User creates a quadratic constraint object by adding a quadratic constraint to a model, rather than by using constructor of QConstraint class.

##### **17.2.26.1 QConstraint.Get()**

Get attribute value of the quadratic constraint.

##### **Synopsis**

```
double Get(string attr)
```

##### **Arguments**

**attr**: name of the attribute being queried.

##### **Return**

attribute value.

##### **17.2.26.2 QConstraint.GetIdx()**

Get index of the quadratic constraint.

##### **Synopsis**

```
int GetIdx()
```

##### **Return**

the index of the quadratic constraint.

##### **17.2.26.3 QConstraint.GetName()**

Get name of the quadratic constraint.

##### **Synopsis**

```
string GetName()
```

##### **Return**

the name of the quadratic constraint.

#### 17.2.26.4 QConstraint.GetRhs()

Get rhs of quadratic constraint.

##### Synopsis

```
double GetRhs()
```

##### Return

rhs of quadratic constraint.

#### 17.2.26.5 QConstraint.GetSense()

Get rhs of quadratic constraint.

##### Synopsis

```
char GetSense()
```

##### Return

rhs of quadratic constraint.

#### 17.2.26.6 QConstraint.Remove()

Remove this constraint from model.

##### Synopsis

```
void Remove()
```

#### 17.2.26.7 QConstraint.Set()

Set attribute value of the quadratic constraint.

##### Synopsis

```
void Set(string attr, double val)
```

##### Arguments

**attr**: name of the attribute.

**val**: new value.

#### 17.2.26.8 QConstraint.SetName()

Set name of quadratic constraint.

##### Synopsis

```
void SetName(string name)
```

##### Arguments

**name**: the name to set.

#### 17.2.26.9 QConstraint.SetRhs()

Set rhs of quadratic constraint.

##### Synopsis

```
void SetRhs(double rhs)
```

##### Arguments

**rhs:** rhs of quadratic constraint.

#### 17.2.26.10 QConstraint.SetSense()

Set sense of quadratic constraint.

##### Synopsis

```
void SetSense(char sense)
```

##### Arguments

**sense:** sense of quadratic constraint.

### 17.2.27 QConstrArray

COPT quadratic constraint array object. To store and access a set of C# *QConstraint* objects, Cardinal Optimizer provides C# *QConstrArray* class, which defines the following methods.

#### 17.2.27.1 QConstrArray.QConstrArray()

Constructor of qconstrarray object.

##### Synopsis

```
QConstrArray()
```

#### 17.2.27.2 QConstrArray.GetQConstr()

Get idx-th quadratic constraint object.

##### Synopsis

```
QConstraint GetQConstr(int idx)
```

##### Arguments

**idx:** index of the quadratic constraint.

##### Return

constraint object with index 'idx'.

#### 17.2.27.3 QConstrArray.PushBack()

Add a quadratic constraint object to array.

##### Synopsis

```
void PushBack(QConstraint constr)
```

##### Arguments

constr: a quadratic constraint object.

#### 17.2.27.4 QConstrArray.Size()

Get the number of quadratic constraint objects.

##### Synopsis

```
int Size()
```

##### Return

number of quadratic constraint objects.

### 17.2.28 QConstrBuilder

COPT quadratic constraint builder object. To help building a quadratic constraint, given a quadratic expression, constraint sense and right-hand side value, Cardinal Optimizer provides C# ConeBuilder class, which defines the following methods.

#### 17.2.28.1 QConstrBuilder.QConstrBuilder()

Constructor of qconstrbuilder object.

##### Synopsis

```
QConstrBuilder()
```

#### 17.2.28.2 QConstrBuilder.GetQuadExpr()

Get quadratic expression associated with constraint.

##### Synopsis

```
QuadExpr GetQuadExpr()
```

##### Return

quadratic expression object.

#### 17.2.28.3 QConstrBuilder.GetSense()

Get sense associated with quadratic constraint.

##### Synopsis

```
char GetSense()
```

##### Return

constraint sense.



#### 17.2.28.4 QConstrBuilder.Set()

Set detail of a quadratic constraint to its builder object.

##### Synopsis

```
void Set(  
    QuadExpr expr,  
    char sense,  
    double rhs)
```

##### Arguments

**expr:** expression object at one side of the quadratic constraint.

**sense:** quadratic constraint sense.

**rhs:** quadratic constant of right side of the constraint.

#### 17.2.29 QConstrBuilderArray

COPT quadratic constraint builder array object. To store and access a set of C# *QConstrBuilder* objects, Cardinal Optimizer provides C# *QConstrBuilderArray* class, which defines the following methods.

##### 17.2.29.1 QConstrBuilderArray.QConstrBuilderArray()

QConstructor of constrbuilderarray object.

##### Synopsis

```
QConstrBuilderArray()
```

##### 17.2.29.2 QConstrBuilderArray.GetBuilder()

Get idx-th quadratic constraint builder object.

##### Synopsis

```
QConstrBuilder GetBuilder(int idx)
```

##### Arguments

**idx:** index of the quadratic constraint builder.

##### Return

constraint builder object with index 'idx'.

##### 17.2.29.3 QConstrBuilderArray.PushBack()

Add a quadratic constraint builder object to constraint builder array.

##### Synopsis

```
void PushBack(QConstrBuilder builder)
```

##### Arguments

**builder:** a quadratic constraint builder object.

#### 17.2.29.4 QConstrBuilderArray.Size()

Get the number of quadratic constraint builder objects.

##### Synopsis

```
int Size()
```

##### Return

number of quadratic constraint builder objects.

### 17.2.30 PsdVar

COPT PSD variable object. PSD variables are always associated with a particular model. User creates a PSD variable object by adding a PSD variable to model, rather than by constructor of PsdVar class.

#### 17.2.30.1 PsdVar.Get()

Get attribute values of PSD variable.

##### Synopsis

```
double[] Get(string attr)
```

##### Arguments

**attr:** attribute name.

##### Return

output array of attribute values.

#### 17.2.30.2 PsdVar.GetDim()

Get dimension of PSD variable.

##### Synopsis

```
int GetDim()
```

##### Return

dimension of PSD variable.

#### 17.2.30.3 PsdVar.GetIdx()

Get length of PSD variable.

##### Synopsis

```
int GetIdx()
```

##### Return

length of PSD variable.

**17.2.30.4 PsdVar.GetLen()**

Get length of PSD variable.

**Synopsis**

```
int GetLen()
```

**Return**

length of PSD variable.

**17.2.30.5 PsdVar.GetName()**

Get name of PSD variable.

**Synopsis**

```
string GetName()
```

**Return**

name of PSD variable.

**17.2.30.6 PsdVar.Remove()**

Remove PSD variable from model.

**Synopsis**

```
void Remove()
```

**17.2.31 PsdVarArray**

COPT PSD variable array object. To store and access a set of *PsdVar* objects, Cardinal Optimizer provides *PsdVarArray* class, which defines the following methods.

**17.2.31.1 PsdVarArray.PsdVarArray()**

Constructor of *PsdVarArray*.

**Synopsis**

```
PsdVarArray()
```

**17.2.31.2 PsdVarArray.GetPsdVar()**

Get idx-th PSD variable object.

**Synopsis**

```
PsdVar GetPsdVar(int idx)
```

**Arguments**

*idx*: index of the PSD variable.

**Return**

PSD variable object with index *idx*.

#### 17.2.31.3 PsdVarArray.PushBack()

Add a PSD variable object to PSD variable array.

##### Synopsis

```
void PushBack(PsdVar var)
```

##### Arguments

**var:** a PSD variable object.

#### 17.2.31.4 PsdVarArray.Reserve()

Reserve capacity to contain at least n items.

##### Synopsis

```
void Reserve(int n)
```

##### Arguments

**n:** minimum capacity for PSD variable object.

#### 17.2.31.5 PsdVarArray.Size()

Get the number of PSD variable objects.

##### Synopsis

```
int Size()
```

##### Return

number of PSD variable objects.

### 17.2.32 PsdExpr

COPT PSD expression object. A PSD expression consists of a linear expression, a list of PSD variables and associated coefficient matrices of PSD terms. PSD expressions are used to build PSD constraints and objectives.

#### 17.2.32.1 PsdExpr.PsdExpr()

Constructor of a PSD expression with default constant value 0.

##### Synopsis

```
PsdExpr(double constant)
```

##### Arguments

**constant:** optional, constant value in PSD expression object.

#### 17.2.32.2 PsdExpr.PsdExpr()

Constructor of a PSD expression with one term.

##### Synopsis

```
PsdExpr(Var var, double coeff)
```

##### Arguments

**var**: variable for the added term.

**coeff**: coefficient for the added term.

#### 17.2.32.3 PsdExpr.PsdExpr()

Constructor of a PSD expression with a linear expression.

##### Synopsis

```
PsdExpr(Expr expr)
```

##### Arguments

**expr**: input linear expression.

#### 17.2.32.4 PsdExpr.PsdExpr()

Constructor of a PSD expression with one term.

##### Synopsis

```
PsdExpr(PsdVar var, SymMatrix mat)
```

##### Arguments

**var**: PSD variable for the added term.

**mat**: coefficient matrix for the added term.

#### 17.2.32.5 PsdExpr.PsdExpr()

Constructor of a PSD expression with one term.

##### Synopsis

```
PsdExpr(PsdVar var, SymMatExpr expr)
```

##### Arguments

**var**: PSD variable for the added term.

**expr**: coefficient expression of symmetric matrices of new PSD term.

#### 17.2.32.6 PsdExpr.AddConstant()

Add constant to the PSD expression.

##### Synopsis

```
void AddConstant(double constant)
```

##### Arguments

**constant**: value to be added.

#### 17.2.32.7 **PsdExpr.AddLinExpr()**

Add a linear expression to PSD expression object.

##### **Synopsis**

```
void AddLinExpr(Expr expr)
```

##### **Arguments**

**expr:** linear expression to be added.

#### 17.2.32.8 **PsdExpr.AddLinExpr()**

Add a linear expression to PSD expression object.

##### **Synopsis**

```
void AddLinExpr(Expr expr, double mult)
```

##### **Arguments**

**expr:** linear expression to be added.

**mult:** multiplier constant.

#### 17.2.32.9 **PsdExpr.AddPsdExpr()**

Add a PSD expression to self.

##### **Synopsis**

```
void AddPsdExpr(PsdExpr expr)
```

##### **Arguments**

**expr:** PSD expression to be added.

#### 17.2.32.10 **PsdExpr.AddPsdExpr()**

Add a PSD expression to self.

##### **Synopsis**

```
void AddPsdExpr(PsdExpr expr, double mult)
```

##### **Arguments**

**expr:** PSD expression to be added.

**mult:** multiplier constant.

#### 17.2.32.11 **PsdExpr.AddTerm()**

Add a linear term to PSD expression object.

##### **Synopsis**

```
void AddTerm(Var var, double coeff)
```

##### **Arguments**

**var:** variable of new linear term.

**coeff:** coefficient of new linear term.

**17.2.32.12 PsdExpr.AddTerm()**

Add a PSD term to PSD expression object.

**Synopsis**

```
void AddTerm(PsdVar var, SymMatrix mat)
```

**Arguments**

**var:** PSD variable of new PSD term.

**mat:** coefficient matrix of new PSD term.

**17.2.32.13 PsdExpr.AddTerm()**

Add a PSD term to PSD expression object.

**Synopsis**

```
void AddTerm(PsdVar var, SymMatExpr expr)
```

**Arguments**

**var:** PSD variable of new PSD term.

**expr:** coefficient expression of symmetric matrices of new PSD term.

**17.2.32.14 PsdExpr.AddTerms()**

Add linear terms to PSD expression object.

**Synopsis**

```
void AddTerms(Var[] vars, double coeff)
```

**Arguments**

**vars:** variables of added linear terms.

**coeff:** one coefficient for added linear terms.

**17.2.32.15 PsdExpr.AddTerms()**

Add linear terms to PSD expression object.

**Synopsis**

```
void AddTerms(Var[] vars, double[] coeffs)
```

**Arguments**

**vars:** variables for added linear terms.

**coeffs:** coefficient array for added linear terms.

**17.2.32.16 PsdExpr.AddTerms()**

Add linear terms to PSD expression object.

**Synopsis**

```
void AddTerms(VarArray vars, double coeff)
```

**Arguments**

**vars:** variables of added linear terms.

**coeff:** one coefficient for added linear terms.

**17.2.32.17 PsdExpr.AddTerms()**

Add linear terms to PSD expression object.

**Synopsis**

```
void AddTerms(VarArray vars, double[] coeffs)
```

**Arguments**

**vars:** variables of added terms.

**coeffs:** coefficients of added terms.

**17.2.32.18 PsdExpr.AddTerms()**

Add PSD terms to PSD expression object.

**Synopsis**

```
void AddTerms(PsdVarArray vars, SymMatrixArray mats)
```

**Arguments**

**vars:** PSD variables for added PSD terms.

**mats:** coefficient matrixes for added PSD terms.

**17.2.32.19 PsdExpr.AddTerms()**

Add PSD terms to PSD expression object.

**Synopsis**

```
void AddTerms(PsdVar[] vars, SymMatrix[] mats)
```

**Arguments**

**vars:** PSD variables for added PSD terms.

**mats:** coefficient matrixes for added PSD terms.



**17.2.32.20 PsdExpr.Clone()**

Deep copy PSD expression object.

**Synopsis**

```
PsdExpr Clone()
```

**Return**

cloned PSD expression object.

**17.2.32.21 PsdExpr.Evaluate()**

evaluate PSD expression after solving

**Synopsis**

```
double Evaluate()
```

**Return**

value of PSD expression

**17.2.32.22 PsdExpr.GetCoeff()**

Get coefficient from the i-th term in PSD expression.

**Synopsis**

```
SymMatExpr GetCoeff(int i)
```

**Arguments**

i: index of the PSD term.

**Return**

coefficient expression of the i-th PSD term.

**17.2.32.23 PsdExpr.GetConstant()**

Get constant in PSD expression.

**Synopsis**

```
double GetConstant()
```

**Return**

constant in PSD expression.

**17.2.32.24 PsdExpr.GetLinExpr()**

Get linear expression in PSD expression.

**Synopsis**

```
Expr GetLinExpr()
```

**Return**

linear expression object.

**17.2.32.25 PsdExpr.GetPsdVar()**

Get the PSD variable from the i-th term in PSD expression.

**Synopsis**

```
PsdVar GetPsdVar(int i)
```

**Arguments**

i: index of the term.

**Return**

the first variable of the i-th term in PSD expression object.

**17.2.32.26 PsdExpr.Multiply()**

multiply a PSD expression and a constant.

**Synopsis**

```
void Multiply(double c)
```

**Arguments**

c: constant operand.

**17.2.32.27 PsdExpr.Remove()**

Remove i-th term from PSD expression object.

**Synopsis**

```
void Remove(int idx)
```

**Arguments**

idx: index of the term to be removed.

**17.2.32.28 PsdExpr.Remove()**

Remove the term associated with variable from PSD expression.

**Synopsis**

```
void Remove(Var var)
```

**Arguments**

var: a variable whose term should be removed.

**17.2.32.29 PsdExpr.Remove()**

Remove the term associated with PSD variable from PSD expression.

**Synopsis**

```
void Remove(PsdVar var)
```

**Arguments**

var: a PSD variable whose term should be removed.

#### **17.2.32.30 PsdExpr.SetCoeff()**

Set coefficient matrix of the i-th term in PSD expression.

##### **Synopsis**

```
void SetCoeff(int i, SymMatrix mat)
```

##### **Arguments**

**i**: index of the PSD term.

**mat**: coefficient matrix of the term.

#### **17.2.32.31 PsdExpr.SetConstant()**

Set constant for the PSD expression.

##### **Synopsis**

```
void SetConstant(double constant)
```

##### **Arguments**

**constant**: the value of the constant.

#### **17.2.32.32 PsdExpr.Size()**

Get number of PSD terms in expression.

##### **Synopsis**

```
long Size()
```

##### **Return**

number of PSD terms.

### **17.2.33 PsdConstraint**

COPT PSD constraint object. PSD constraints are always associated with a particular model. User creates a PSD constraint object by adding a PSD constraint to model, rather than by constructor of PsdConstraint class.

#### **17.2.33.1 PsdConstraint.Get()**

Get attribute value of the PSD constraint. Support related PSD attributes.

##### **Synopsis**

```
double Get(string attr)
```

##### **Arguments**

**attr**: name of queried attribute.

##### **Return**

attribute value.

#### 17.2.33.2 **PsdConstraint.GetIdx()**

Get index of the PSD constraint.

##### **Synopsis**

```
int GetIdx()
```

##### **Return**

the index of the PSD constraint.

#### 17.2.33.3 **PsdConstraint.GetName()**

Get name of the PSD constraint.

##### **Synopsis**

```
string GetName()
```

##### **Return**

the name of the PSD constraint.

#### 17.2.33.4 **PsdConstraint.Remove()**

Remove this PSD constraint from model.

##### **Synopsis**

```
void Remove()
```

#### 17.2.33.5 **PsdConstraint.Set()**

Set attribute value of the PSD constraint. Support related PSD attributes.

##### **Synopsis**

```
void Set(string attr, double value)
```

##### **Arguments**

**attr**: name of queried attribute.

**value**: new value.

#### 17.2.33.6 **PsdConstraint.SetName()**

Set name of a PSD constraint.

##### **Synopsis**

```
void SetName(string name)
```

##### **Arguments**

**name**: the name to set.

### 17.2.34 PsdConstrArray

COPT PSD constraint array object. To store and access a set of *PsdConstraint* objects, Cardinal Optimizer provides PsdConstrArray class, which defines the following methods.

#### 17.2.34.1 PsdConstrArray.PsdConstrArray()

Constructor of PsdConstrArray object.

**Synopsis**

```
PsdConstrArray()
```

#### 17.2.34.2 PsdConstrArray.GetPsdConstr()

Get idx-th PSD constraint object.

**Synopsis**

```
PsdConstraint GetPsdConstr(int idx)
```

**Arguments**

idx: index of the PSD constraint.

**Return**

PSD constraint object with index idx.

#### 17.2.34.3 PsdConstrArray.PushBack()

Add a PSD constraint object to PSD constraint array.

**Synopsis**

```
void PushBack(PsdConstraint constr)
```

**Arguments**

constr: a PSD constraint object.

#### 17.2.34.4 PsdConstrArray.Reserve()

Reserve capacity to contain at least n items.

**Synopsis**

```
void Reserve(int n)
```

**Arguments**

n: minimum capacity for PSD constraint objects.

#### 17.2.34.5 PsdConstrArray.Size()

Get the number of PSD constraint objects.

##### Synopsis

```
int Size()
```

##### Return

number of PSD constraint objects.

### 17.2.35 PsdConstrBuilder

COPT PSD constraint builder object. To help building a PSD constraint, given a PSD expression, constraint sense and right-hand side value, Cardinal Optimizer provides PsdConstrBuilder class, which defines the following methods.

#### 17.2.35.1 PsdConstrBuilder.PsdConstrBuilder()

Constructor of PsdConstrBuilder object.

##### Synopsis

```
PsdConstrBuilder()
```

#### 17.2.35.2 PsdConstrBuilder.GetPsdExpr()

Get expression associated with PSD constraint.

##### Synopsis

```
PsdExpr GetPsdExpr()
```

##### Return

PSD expression object.

#### 17.2.35.3 PsdConstrBuilder.GetRange()

Get range from lower bound to upper bound of range constraint.

##### Synopsis

```
double GetRange()
```

##### Return

length from lower bound to upper bound of the constraint.

#### 17.2.35.4 PsdConstrBuilder.GetSense()

Get sense associated with PSD constraint.

##### Synopsis

```
char GetSense()
```

##### Return

PSD constraint sense.

#### 17.2.35.5 `PsdConstrBuilder.Set()`

Set detail of a PSD constraint to its builder object.

##### Synopsis

```
void Set(  
    PsdExpr expr,  
    char sense,  
    double rhs)
```

##### Arguments

**expr**: expression object at one side of the PSD constraint.

**sense**: PSD constraint sense, other than COPT\_RANGE.

**rhs**: constant at right side of the PSD constraint.

#### 17.2.35.6 `PsdConstrBuilder.SetRange()`

Set a range constraint to its builder.

##### Synopsis

```
void SetRange(PsdExpr expr, double range)
```

##### Arguments

**expr**: PSD expression object, whose constant is negative upper bound.

**range**: length from lower bound to upper bound of the constraint. Must greater than 0.

### 17.2.36 `PsdConstrBuilderArray`

COPT PSD constraint builder array object. To store and access a set of *PsdConstrBuilder* objects, Cardinal Optimizer provides `PsdConstrBuilderArray` class, which defines the following methods.

#### 17.2.36.1 `PsdConstrBuilderArray.PsdConstrBuilderArray()`

Constructor of `PsdConstrBuilderArray` object.

##### Synopsis

```
PsdConstrBuilderArray()
```

#### 17.2.36.2 `PsdConstrBuilderArray.GetBuilder()`

Get idx-th PSD constraint builder object.

##### Synopsis

```
PsdConstrBuilder GetBuilder(int idx)
```

##### Arguments

**idx**: index of the PSD constraint builder.

##### Return

PSD constraint builder object with index idx.

#### 17.2.36.3 PsdConstrBuilderArray.PushBack()

Add a PSD constraint builder object to PSD constraint builder array.

##### Synopsis

```
void PushBack(PsdConstrBuilder builder)
```

##### Arguments

**builder:** a PSD constraint builder object.

#### 17.2.36.4 PsdConstrBuilderArray.Reserve()

Reserve capacity to contain at least n items.

##### Synopsis

```
void Reserve(int n)
```

##### Arguments

**n:** minimum capacity for PSD constraint builder object.

#### 17.2.36.5 PsdConstrBuilderArray.Size()

Get the number of PSD constraint builder objects.

##### Synopsis

```
int Size()
```

##### Return

number of PSD constraint builder objects.

### 17.2.37 SymMatrix

COPT symmetric matrix object. Symmetric matrices are always associated with a particular model. User creates a symmetric matrix object by adding a symmetric matrix to model, rather than by constructor of SymMatrix class.

Symmetric matrices are used as coefficient matrices of PSD terms in PSD expressions, PSD constraints or PSD objectives.

#### 17.2.37.1 SymMatrix.GetDim()

Get the dimension of a symmetric matrix.

##### Synopsis

```
int GetDim()
```

##### Return

dimension of a symmetric matrix.



### 17.2.37.2 **SymMatrix.GetIdx()**

Get the index of a symmetric matrix.

#### **Synopsis**

```
int GetIdx()
```

#### **Return**

index of a symmetric matrix.

## 17.2.38 **SymMatrixArray**

COPT symmetric matrix object. To store and access a set of *SymMatrix* objects, Cardinal Optimizer provides SymMatrixArray class, which defines the following methods.

### 17.2.38.1 **SymMatrixArray.SymMatrixArray()**

Constructor of SymMatrixArray.

#### **Synopsis**

```
SymMatrixArray()
```

### 17.2.38.2 **SymMatrixArray.GetMatrix()**

Get i-th SymMatrix object.

#### **Synopsis**

```
SymMatrix GetMatrix(int idx)
```

#### **Arguments**

idx: index of the SymMatrix object.

#### **Return**

SymMatrix object with index idx.

### 17.2.38.3 **SymMatrixArray.PushBack()**

Add a SymMatrix object to SymMatrix array.

#### **Synopsis**

```
void PushBack(SymMatrix mat)
```

#### **Arguments**

mat: a SymMatrix object.

#### 17.2.38.4 SymMatrixArray.Reserve()

Reserve capacity to contain at least n items.

##### Synopsis

```
void Reserve(int n)
```

##### Arguments

n: minimum capacity for symmetric matrix object.

#### 17.2.38.5 SymMatrixArray.Size()

Get the number of SymMatrix objects.

##### Synopsis

```
int Size()
```

##### Return

number of SymMatrix objects.

### 17.2.39 SymMatExpr

COPT symmetric matrix expression object. A symmetric matrix expression is a linear combination of symmetric matrices, which is still a symmetric matrix. However, by doing so, we are able to delay computing the final matrix until setting PSD constraints or PSD objective.

#### 17.2.39.1 SymMatExpr.SymMatExpr()

Constructor of a symmetric matrix expression.

##### Synopsis

```
SymMatExpr()
```

#### 17.2.39.2 SymMatExpr.SymMatExpr()

Constructor of a symmetric matrix expression with one term.

##### Synopsis

```
SymMatExpr(SymMatrix mat, double coeff)
```

##### Arguments

mat: symmetric matrix of the added term.

coeff: optional, coefficient for the added term. Its default value is 1.0.

#### 17.2.39.3 SymMatExpr.AddSymMatExpr()

Add a symmetric matrix expression to self.

##### Synopsis

```
void AddSymMatExpr(SymMatExpr expr, double mult)
```

##### Arguments

**expr**: symmetric matrix expression to be added.

**mult**: optional, constant multiplier, default value is 1.0.

#### 17.2.39.4 SymMatExpr.AddTerm()

Add a term to symmetric matrix expression object.

##### Synopsis

```
bool AddTerm(SymMatrix mat, double coeff)
```

##### Arguments

**mat**: symmetric matrix of the new term.

**coeff**: coefficient of the new term.

##### Return

True if the term is added successfully.

#### 17.2.39.5 SymMatExpr.AddTerms()

Add multiple terms to expression object.

##### Synopsis

```
int AddTerms(SymMatrixArray mats, double[] coeffs)
```

##### Arguments

**mats**: symmetric matrix array object for added terms.

**coeffs**: coefficient array for added terms.

##### Return

Number of added terms. If negative, fail to add one of terms.

#### 17.2.39.6 SymMatExpr.AddTerms()

Add multiple terms to expression object.

##### Synopsis

```
int AddTerms(SymMatrix[] mats, double[] coeffs)
```

##### Arguments

**mats**: symmetric matrix array object for added terms.

**coeffs**: coefficient array for added terms.

##### Return

Number of added terms. If negative, fail to add one of terms.

#### 17.2.39.7 SymMatExpr.AddTerms()

Add multiple terms to expression object.

##### Synopsis

```
int AddTerms(SymMatrix[] mats, double coeff)
```

##### Arguments

**mats:** symmetric matrix array object for added terms.

**coeff:** optional, common coefficient for added terms, default is 1.0.

##### Return

Number of added terms. If negative, fail to add one of terms.

#### 17.2.39.8 SymMatExpr.Clone()

Deep copy symmetric matrix expression object.

##### Synopsis

```
SymMatExpr Clone()
```

##### Return

cloned expression object.

#### 17.2.39.9 SymMatExpr.GetCoeff()

Get coefficient of the i-th term in expression object.

##### Synopsis

```
double GetCoeff(int i)
```

##### Arguments

**i:** index of the term.

##### Return

coefficient of the i-th term.

#### 17.2.39.10 SymMatExpr.GetDim()

Get dimension of symmetric matrix in expression.

##### Synopsis

```
int GetDim()
```

##### Return

dimension of symmetric matrix.

**17.2.39.11 SymMatExpr.GetSymMat()**

Get symmetric matrix of the i-th term in expression object.

**Synopsis**

```
SymMatrix GetSymMat(int i)
```

**Arguments**

i: index of the term.

**Return**

the symmetric matrix of the i-th term.

**17.2.39.12 SymMatExpr.Multiply()**

multiply a symmetric matrix expression and a constant.

**Synopsis**

```
void Multiply(double c)
```

**Arguments**

c: constant operand.

**17.2.39.13 SymMatExpr.Remove()**

Remove i-th term from expression object.

**Synopsis**

```
void Remove(int idx)
```

**Arguments**

idx: index of the term to be removed.

**17.2.39.14 SymMatExpr.Remove()**

Remove the term associated with the symmetric matrix.

**Synopsis**

```
void Remove(SymMatrix mat)
```

**Arguments**

mat: a symmetric matrix whose term should be removed.

**17.2.39.15 SymMatExpr.Reserve()**

Reserve capacity to contain at least n items.

**Synopsis**

```
void Reserve(int n)
```

**Arguments**

n: minimum capacity for expression object.

**17.2.39.16 SymMatExpr.SetCoeff()**

Set coefficient for the i-th term in expression object.

**Synopsis**

```
void SetCoeff(int i, double val)
```

**Arguments**

i: index of the term.

val: coefficient of the term.

**17.2.39.17 SymMatExpr.Size()**

Get number of terms in expression.

**Synopsis**

```
long Size()
```

**Return**

number of terms.

**17.2.40 ProbBuffer**

Buffer object for COPT problem. ProbBuffer object holds the (MPS) problem in string format.

**17.2.40.1 ProbBuffer.ProbBuffer()**

Constructor of ProbBuffer object.

**Synopsis**

```
ProbBuffer(int sz)
```

**Arguments**

sz: initial size of the problem buffer.

**17.2.40.2 ProbBuffer.GetData()**

Get string of problem in problem buffer.

**Synopsis**

```
string GetData()
```

**Return**

string of problem in problem buffer.

#### 17.2.40.3 ProbBuffer.Resize()

Resize buffer to given size, and zero-ended

##### Synopsis

```
void Resize(int sz)
```

##### Arguments

sz: new buffer size.

#### 17.2.40.4 ProbBuffer.Size()

Get the size of problem buffer.

##### Synopsis

```
int Size()
```

##### Return

size of problem buffer.

### 17.2.41 CoptException

Copt exception object.

#### 17.2.41.1 CoptException.CoptException()

Constructor of coptexception.

##### Synopsis

```
CoptException(int code, string msg)
```

##### Arguments

code: error code for exception.

msg: error message for exception.

#### 17.2.41.2 CoptException.GetCode()

Get the error code associated with the exception.

##### Synopsis

```
int GetCode()
```

##### Return

the error code.

# Chapter 18

## Java API Reference

The **Cardinal Optimizer** provides a Java API library. This chapter documents all COPT Java constants and API functions for Java applications.

### 18.1 Constants

There are four types of constants defined in **Cardinal Optimizer**. They are general constants, information constants, attributes constants and parameters constants.

#### 18.1.1 General Constants

For the contents of Java general constants, see *General Constants*.

General constants are defined in `Consts` class. User may refer general constants with namespace, that is, `copt.Consts.XXXX`.

#### 18.1.2 Attributes

For the contents of Java attribute constants, see *Attributes*.

All COPT Java attributes are defined in `DblAttr` and `IntAttr` classes. User may refer double attributes by `Copt.DblAttr.XXXX`, and integer attributes by `Copt.IntAttr.XXXX`.

In the Java API, user can get the attribute value by specifying the attribute name. The two functions of obtaining attribute values are as follows, please refer to *Java API: Model Class* for details.

- `Model.getIntAttr()`: Get value of a COPT integer attribute.
- `Model.getDblAttr()`: Get value of a COPT double attribute.

#### 18.1.3 Information

For the contents of Java information constants, see *Information*.

All COPT Java Information constants are defined in `Db1Info` class. User may refer information constants with namespace, that is, `copt.Db1Info.XXXX`.



### 18.1.4 Parameters

For the contents of Java parameters constants, see *Parameters*.

All COPT Java parameters are defined in `DblParam` and `IntParam` classes. User may refer double parameters by `copt.DblParam.XXXX`, and integer parameters by `copt.IntParam.XXXX`.

In the Java API, user can get and set the parameter value by specifying the parameter name. The provided functions are as follows, please refer to *Java API: Model Class* for details.

- Get detailed information of the specified parameter (current value/max/min): `Model.getParamInfo()`
- Get the current value of the specified integer/double parameter: `Model.getIntParam()` / `Model.getDblParam()`
- Set the specified integer/double parameter value: `Model.setIntParam()` / `Model.setDblParam()`

## 18.2 Java Modeling Classes

This chapter documents COPT Java interface. Users may refer to Java classes described below for details of how to construct and solve Java models.

### 18.2.1 Envr

Essentially, any Java application using Cardinal Optimizer should start with a COPT environment. COPT models are always associated with a COPT environment. User must create an environment object before populating models. User generally only need a single environment object in program.

#### 18.2.1.1 `Envr.Envr()`

Constructor of COPT `Envr` object.

##### Synopsis

```
Envr()
```

#### 18.2.1.2 `Envr.Envr()`

Constructor of COPT `Envr` object, given a license folder.

##### Synopsis

```
Envr(String licDir)
```

##### Arguments

`licDir`: directory having local license or client config file.

### 18.2.1.3 `Envr.Envr()`

Constructor of COPT `Envr` object, given an `Envr` config object.

#### Synopsis

```
Envr(EnvrConfig config)
```

#### Arguments

`config`: `Envr` config object holding settings for remote connection.

### 18.2.1.4 `Envr.close()`

close remote connection and token becomes invalid for all problems

#### Synopsis

```
void close()
```

### 18.2.1.5 `Envr.createModel()`

Create a model object.

#### Synopsis

```
Model createModel(String name)
```

#### Arguments

`name`: customized model name.

#### Return

a model object.

## 18.2.2 `EnvrConfig`

If user connects to COPT remote services, such as floating token server or compute cluster, it is necessary to add config settings with `EnvrConfig` object.

### 18.2.2.1 `EnvrConfig.EnvrConfig()`

Constructor of `envr` config object.

#### Synopsis

```
EnvrConfig()
```

### 18.2.2.2 `EnvrConfig.set()`

Set config settings in terms of name-value pair.

#### Synopsis

```
void set(String name, String value)
```

#### Arguments

`name`: keyword of a config setting.

`value`: value of a config setting.

### 18.2.3 Model

In general, a COPT model consists of a set of variables, a (linear) objective function on these variables, a set of constraints on these variables, etc. COPT model class encapsulates all required methods for constructing a COPT model.

#### 18.2.3.1 Model.Model()

Constructor of model.

##### Synopsis

```
Model(Envr env, String name)
```

##### Arguments

**env:** associated environment object.

**name:** string of model name.

#### 18.2.3.2 Model.addCone()

Add a cone constraint to model.

##### Synopsis

```
Cone addCone(Var[] vars, int type)
```

##### Arguments

**vars:** variables that participate in the cone constraint.

**type:** type of a cone constraint.

##### Return

new cone constraint object.

#### 18.2.3.3 Model.addCone()

Add a cone constraint to model.

##### Synopsis

```
Cone addCone(VarArray vars, int type)
```

##### Arguments

**vars:** variables that participate in the cone constraint.

**type:** type of a cone constraint.

##### Return

new cone constraint object.

#### 18.2.3.4 Model.addCone()

Add a cone constraint to model.

##### Synopsis

```
Cone addCone(  
    int dim,  
    int type,  
    char[] pvtype,  
    String prefix)
```

##### Arguments

**dim:** dimension of the cone constraint.

**type:** type of a cone constraint.

**pvtype:** types of variables in the cone.

**prefix:** name prefix of variables in the cone.

##### Return

new cone constraint object.

#### 18.2.3.5 Model.addCone()

Add a cone constraint to model.

##### Synopsis

```
Cone addCone(ConeBuilder builder)
```

##### Arguments

**builder:** builder for new cone constraint.

##### Return

new cone constraint object.

#### 18.2.3.6 Model.addConstr()

Add a linear constraint to model.

##### Synopsis

```
Constraint addConstr(  
    Expr expr,  
    char sense,  
    double rhs,  
    String name)
```

##### Arguments

**expr:** expression for the new constraint.

**sense:** sense for new linear constraint, other than range sense.

**rhs:** right hand side value for the new constraint.

**name:** name of new constraint.

**Return**

new constraint object.

**18.2.3.7 Model.addConstr()**

Add a linear constraint to model.

**Synopsis**

```
Constraint addConstr(  
    Expr expr,  
    char sense,  
    Var var,  
    String name)
```

**Arguments**

**expr:** expression for the new constraint.

**sense:** sense for new linear constraint, other than range sense.

**var:** variable for the new constraint.

**name:** name of new constraint.

**Return**

new constraint object.

**18.2.3.8 Model.addConstr()**

Add a linear constraint to model.

**Synopsis**

```
Constraint addConstr(  
    Expr lhs,  
    char sense,  
    Expr rhs,  
    String name)
```

**Arguments**

**lhs:** left hand side expression for the new constraint.

**sense:** sense for new linear constraint, other than range sense.

**rhs:** right hand side expression for the new constraint.

**name:** name of new constraint.

**Return**

new constraint object.

#### 18.2.3.9 Model.addConstr()

Add a linear constraint to model.

##### Synopsis

```
Constraint addConstr(  
    Expr expr,  
    double lb,  
    double rb,  
    String name)
```

##### Arguments

**expr:** expression for the new constraint.  
**lb:** lower bound for the new constraint.  
**rb:** upper bound for the new constraint  
**name:** name of new constraint.

##### Return

new constraint object.

#### 18.2.3.10 Model.addConstr()

Add a linear constraint to a model.

##### Synopsis

```
Constraint addConstr(ConstrBuilder builder, String name)
```

##### Arguments

**builder:** builder for the new constraint.  
**name:** name of new constraint.

##### Return

new constraint object.

#### 18.2.3.11 Model.addConstrs()

Add linear constraints to model.

##### Synopsis

```
ConstrArray addConstrs(  
    int count,  
    char[] senses,  
    double[] rhss,  
    String prefix)
```

##### Arguments

**count:** number of constraints added to model.  
**senses:** sense array for new linear constraints, other than range  
**rhss:** right hand side values for new variables.

prefix: name prefix for new constraints.

**Return**

array of new constraint objects.

**18.2.3.12 Model.addConstrs()**

Add linear constraints to a model.

**Synopsis**

```
ConstrArray addConstrs(  
    int count,  
    double[] lbs,  
    double[] ubs,  
    String prefix)
```

**Arguments**

count: number of constraints added to the model.

lbs: lower bounds of new constraints.

ubs: upper bounds of new constraints.

prefix: name prefix for new constraints.

**Return**

array of new constraint objects.

**18.2.3.13 Model.addConstrs()**

Add linear constraints to a model.

**Synopsis**

```
ConstrArray addConstrs(ConstrBuilderArray builders, String prefix)
```

**Arguments**

builders: builders for new constraints.

prefix: name prefix for new constraints.

**Return**

array of new constraint objects.

**18.2.3.14 Model.addDenseMat()**

Add a dense symmetric matrix to a model.

**Synopsis**

```
SymMatrix addDenseMat(int dim, double[] vals)
```

**Arguments**

dim: dimension of the dense symmetric matrix.

vals: array of non

**Return**

new symmetric matrix object.

#### 18.2.3.15 **Model.addDenseMat()**

Add a dense symmetric matrix to a model.

##### **Synopsis**

```
SymMatrix addDenseMat(int dim, double val)
```

##### **Arguments**

**dim**: dimension of dense symmetric matrix.

**val**: value to fill dense symmetric matrix.

##### **Return**

new symmetric matrix object.

#### 18.2.3.16 **Model.addDiagMat()**

Add a diagonal matrix to a model.

##### **Synopsis**

```
SymMatrix addDiagMat(int dim, double val)
```

##### **Arguments**

**dim**: dimension of diagonal matrix.

**val**: value to fill diagonal elements.

##### **Return**

new diagonal matrix object.

#### 18.2.3.17 **Model.addDiagMat()**

Add a diagonal matrix to a model.

##### **Synopsis**

```
SymMatrix addDiagMat(int dim, double[] vals)
```

##### **Arguments**

**dim**: dimension of diagonal matrix.

**vals**: array of values of diagonal elements.

##### **Return**

new diagonal matrix object.



#### 18.2.3.18 Model.addDiagMat()

Add a diagonal matrix to a model.

##### Synopsis

```
SymMatrix addDiagMat(  
    int dim,  
    double val,  
    int offset)
```

##### Arguments

**dim**: dimension of diagonal matrix.

**val**: value to fill diagonal elements.

**offset**: shift distance against diagonal line.

##### Return

new diagonal matrix object.

#### 18.2.3.19 Model.addDiagMat()

Add a diagonal matrix to a model.

##### Synopsis

```
SymMatrix addDiagMat(  
    int dim,  
    double[] vals,  
    int offset)
```

##### Arguments

**dim**: dimension of diagonal matrix.

**vals**: array of values of diagonal elements.

**offset**: shift distance against diagonal line.

##### Return

new diagonal matrix object.

#### 18.2.3.20 Model.addEyeMat()

Add an identity matrix to a model.

##### Synopsis

```
SymMatrix addEyeMat(int dim)
```

##### Arguments

**dim**: dimension of identity matrix.

##### Return

new identity matrix object.

#### 18.2.3.21 Model.addGenConstrIndicator()

Add a general constraint of type indicator to model.

##### Synopsis

```
GenConstr addGenConstrIndicator(GenConstrBuilder builder)
```

##### Arguments

**builder:** builder for the general constraint.

##### Return

new general constraint object of type indicator.

#### 18.2.3.22 Model.addGenConstrIndicator()

Add a general constraint of type indicator to model.

##### Synopsis

```
GenConstr addGenConstrIndicator(  
    Var binvar,  
    int binval,  
    ConstrBuilder builder)
```

##### Arguments

**binvar:** binary indicator variable.

**binval:** value for binary indicator variable that force a linear

**builder:** builder for linear constraint.

##### Return

new general constraint object of type indicator.

#### 18.2.3.23 Model.addGenConstrIndicator()

Add a general constraint of type indicator to model.

##### Synopsis

```
GenConstr addGenConstrIndicator(  
    Var binvar,  
    int binval,  
    Expr expr,  
    char sense,  
    double rhs)
```

##### Arguments

**binvar:** binary indicator variable.

**binval:** value for binary indicator variable that force a linear

**expr:** expression for new linear constraint.

**sense:** sense for new linear constraint.

**rhs:** right hand side value for new linear constraint.

**Return**

new general constraint object of type indicator.

**18.2.3.24 Model.addOnesMat()**

Add a dense symmetric matrix of value one to a model.

**Synopsis**

```
SymMatrix addOnesMat(int dim)
```

**Arguments**

**dim**: dimension of dense symmetric matrix.

**Return**

new symmetric matrix object.

**18.2.3.25 Model.addPsdConstr()**

Add a PSD constraint to model.

**Synopsis**

```
PsdConstraint addPsdConstr(  
    PsdExpr expr,  
    char sense,  
    double rhs,  
    String name)
```

**Arguments**

**expr**: PSD expression for new PSD constraint.

**sense**: sense for new PSD constraint.

**rhs**: double value at right side of the new PSD constraint.

**name**: optional, name of new PSD constraint.

**Return**

new PSD constraint object.

**18.2.3.26 Model.addPsdConstr()**

Add a PSD constraint to model.

**Synopsis**

```
PsdConstraint addPsdConstr(  
    PsdExpr expr,  
    double lb,  
    double ub,  
    String name)
```

**Arguments**

**expr:** expression for new PSD constraint.  
**lb:** lower bound for ew PSD constraint.  
**ub:** upper bound for new PSD constraint  
**name:** optional, name of new PSD constraint.

**Return**

new PSD constraint object.

**18.2.3.27 Model.addPsdConstr()**

Add a PSD constraint to model.

**Synopsis**

```
PsdConstraint addPsdConstr(  
    PsdExpr lhs,  
    char sense,  
    PsdExpr rhs,  
    String name)
```

**Arguments**

**lhs:** PSD expression at left side of new PSD constraint.  
**sense:** sense for new PSD constraint.  
**rhs:** PSD expression at right side of new PSD constraint.  
**name:** optional, name of new PSD constraint.

**Return**

new PSD constraint object.

**18.2.3.28 Model.addPsdConstr()**

Add a PSD constraint to a model.

**Synopsis**

```
PsdConstraint addPsdConstr(PsdConstrBuilder builder, String name)
```

**Arguments**

**builder:** builder for new PSD constraint.  
**name:** optional, name of new PSD constraint.

**Return**

new PSD constraint object.

#### 18.2.3.29 Model.addPsdVar()

Add a new PSD variable to model.

##### Synopsis

```
PsdVar addPsdVar(int dim, String name)
```

##### Arguments

**dim:** dimension of new PSD variable.

**name:** name of new PSD variable.

##### Return

PSD variable object.

#### 18.2.3.30 Model.addPsdVars()

Add new PSD variables to model.

##### Synopsis

```
PsdVarArray addPsdVars(  
    int count,  
    int[] dims,  
    String prefix)
```

##### Arguments

**count:** number of new PSD variables.

**dims:** array of dimensions of new PSD variables.

**prefix:** name prefix of new PSD variables.

##### Return

array of PSD variable objects.

#### 18.2.3.31 Model.addQConstr()

Add a quadratic constraint to model.

##### Synopsis

```
QConstraint addQConstr(  
    QuadExpr expr,  
    char sense,  
    double rhs,  
    String name)
```

##### Arguments

**expr:** quadratic expression for the new constraint.

**sense:** sense for new quadratic constraint.

**rhs:** double value at right side of the new quadratic constraint.

**name:** optional, name of new quadratic constraint.

##### Return

new quadratic constraint object.

#### 18.2.3.32 **Model.addQConstr()**

Add a quadratic constraint to model.

##### Synopsis

```
QConstraint addQConstr(  
    QuadExpr lhs,  
    char sense,  
    QuadExpr rhs,  
    String name)
```

##### Arguments

**lhs**: quadratic expression at left side of new quadratic constraint.

**sense**: sense for new quadratic constraint.

**rhs**: quadratic expression at right side of new quadratic constraint.

**name**: optional, name of new quadratic constraint.

##### Return

new quadratic constraint object.

#### 18.2.3.33 **Model.addQConstr()**

Add a quadratic constraint to a model.

##### Synopsis

```
QConstraint addQConstr(QConstrBuilder builder, String name)
```

##### Arguments

**builder**: builder for the new quadratic constraint.

**name**: optional, name of new quadratic constraint.

##### Return

new quadratic constraint object.

#### 18.2.3.34 **Model.addSos()**

Add a SOS constraint to model.

##### Synopsis

```
Sos addSos(SosBuilder builder)
```

##### Arguments

**builder**: builder for new SOS constraint.

##### Return

new SOS constraint object.

**18.2.3.35 Model.addSos()**

Add a SOS constraint to model.

**Synopsis**

```
Sos addSos(  
    Var[] vars,  
    double[] weights,  
    int type)
```

**Arguments**

**vars:** variables that participate in the SOS constraint.

**weights:** weights for variables in the SOS constraint.

**type:** type of SOS constraint.

**Return**

new SOS constraint object.

**18.2.3.36 Model.addSos()**

Add a SOS constraint to model.

**Synopsis**

```
Sos addSos(  
    VarArray vars,  
    double[] weights,  
    int type)
```

**Arguments**

**vars:** variables that participate in the SOS constraint.

**weights:** weights for variables in the SOS constraint.

**type:** type of SOS constraint.

**Return**

new SOS constraint object.

**18.2.3.37 Model.addSparseMat()**

Add a sparse symmetric matrix to a model.

**Synopsis**

```
SymMatrix addSparseMat(  
    int dim,  
    int nElements,  
    int[] rows,  
    int[] cols,  
    double[] vals)
```

**Arguments**

**dim:** dimension of the sparse symmetric matrix.

**nElems:** number of non

**rows:** array of row indexes of non

**cols:** array of col indexes of non

**vals:** array of values of non

#### **Return**

new symmetric matrix object.

#### **18.2.3.38 Model.addSymMat()**

Given a symmetric matrix expression, add results matrix to model.

##### **Synopsis**

```
SymMatrix addSymMat(SymMatExpr expr)
```

##### **Arguments**

**expr:** symmetric matrix expression object.

##### **Return**

results symmetric matrix object.

#### **18.2.3.39 Model.addVar()**

Add a variable and the associated non-zero coefficients as column.

##### **Synopsis**

```
Var addVar(  
    double lb,  
    double ub,  
    double obj,  
    char vtype,  
    String name)
```

##### **Arguments**

**lb:** lower bound for new variable.

**ub:** upper bound for new variable.

**obj:** objective coefficient for new variable.

**vtype:** variable type for new variable.

**name:** name for new variable.

##### **Return**

new variable object.



#### 18.2.3.40 Model.addVar()

Add a variable and the associated non-zero coefficients as column.

##### Synopsis

```
Var addVar(  
    double lb,  
    double ub,  
    double obj,  
    char vtype,  
    Column col,  
    String name)
```

##### Arguments

lb: lower bound for new variable.

ub: upper bound for new variable.

obj: objective coefficient for new variable.

vtype: variable type for new variable.

col: column object for specifying a set of constraints to which the

name: name for new variable.

##### Return

new variable object.

#### 18.2.3.41 Model.addVars()

Add new variables to model.

##### Synopsis

```
VarArray addVars(  
    int count,  
    char vtype,  
    String prefix)
```

##### Arguments

count: the number of variables to add.

vtype: variable types for new variables.

prefix: prefix part for names of new variables.

##### Return

array of new variable objects.

#### 18.2.3.42 Model.addVars()

Add new variables to model.

##### Synopsis

```
VarArray addVars(  
    int count,  
    double lb,  
    double ub,  
    double obj,  
    char vtype,  
    String prefix)
```

##### Arguments

**count:** the number of variables to add.  
**lb:** lower bound for new variables.  
**ub:** upper bound for new variables.  
**obj:** objective coefficient for new variables.  
**vtype:** variable type for new variables.  
**prefix:** prefix part for names of new variables.

##### Return

array of new variable objects.

#### 18.2.3.43 Model.addVars()

Add new variables to model.

##### Synopsis

```
VarArray addVars(  
    int count,  
    double[] lbs,  
    double[] ub,  
    double[] objs,  
    char[] types,  
    String prefix)
```

##### Arguments

**count:** the number of variables to add.  
**lbs:** lower bounds for new variables. if NULL, lower bounds are 0.0.  
**ubs:** upper bounds for new variables. if NULL, upper bounds are  
**objs:** objective coefficients for new variables. if NULL, objective  
**types:** variable types for new variables. if NULL, variable types are  
**prefix:** prefix part for names of new variables.

##### Return

array of new variable objects.

#### 18.2.3.44 **Model.addVars()**

Add new variables to model.

##### Synopsis

```
VarArray addVars(  
    double[] lbs,  
    double[] ub,  
    double[] objs,  
    char[] types,  
    Column[] cols,  
    String prefix)
```

##### Arguments

**lbs**: lower bounds for new variables. if NULL, lower bounds are 0.0.

**ub**: upper bounds for new variables. if NULL, upper bounds are

**objs**: objective coefficients for new variables. if NULL, objective

**types**: variable types for new variables. if NULL, variable types are

**cols**: column objects for specifying a set of constraints to which

**prefix**: prefix part for names of new variables.

##### Return

array of new variable objects.

#### 18.2.3.45 **Model.addVars()**

Add new variables to model.

##### Synopsis

```
VarArray addVars(  
    double[] lbs,  
    double[] ub,  
    double[] objs,  
    char[] types,  
    ColumnArray cols,  
    String prefix)
```

##### Arguments

**lbs**: lower bounds for new variables. if NULL, lower bounds are 0.0.

**ub**: upper bounds for new variables. if NULL, upper bounds are

**objs**: objective coefficients for new variables. if NULL, objective

**types**: variable types for new variables. if NULL, variable types are

**cols**: columnarray for specifying a set of constraints to which each

**prefix**: prefix part for names of new variables.

**Return**

array of new variable objects.

**18.2.3.46 Model.clear()**

Clear all settings including problem itself.

**Synopsis**

```
void clear()
```

**18.2.3.47 Model.clone()**

Deep copy a new model object.

**Synopsis**

```
Model clone()
```

**Return**

cloned model object.

**18.2.3.48 Model.computeIIS()**

Compute IIS for infeasible model.

**Synopsis**

```
void computeIIS()
```

**18.2.3.49 Model.delPsdObj()**

delete PSD part of objective in model.

**Synopsis**

```
void delPsdObj()
```

**18.2.3.50 Model.delQuadObj()**

delete quadratic part of objective in model.

**Synopsis**

```
void delQuadObj()
```

**18.2.3.51 Model.feasRelax()**

Compute feasibility relaxation for infeasible model.

**Synopsis**

```
void feasRelax(  
    VarArray vars,  
    double[] colLowPen,  
    double[] colUppPen,  
    ConstrArray cons,
```

```
double[] rowBndPen,  
double[] rowUppPen)
```

**Arguments**

**vars:** an array of variables.  
**colLowPen:** penalties for lower bounds of variables.  
**colUppPen:** penalties for upper bounds of variables.  
**cons:** an array of constraints.  
**rowBndPen:** penalties for right hand sides of constraints.  
**rowUppPen:** penalties for upper bounds of range constraints.

**18.2.3.52 Model.feasRelax()**

Compute feasibility relaxation for infeasible model.

**Synopsis**

```
void feasRelax(int ifRelaxVars, int ifRelaxCons)
```

**Arguments**

**ifRelaxVars:** whether to relax variables.  
**ifRelaxCons:** whether to relax constraints.

**18.2.3.53 Model.get()**

Query values of double parameter or double attribute, associated

**Synopsis**

```
double[] get(String name, Var[] vars)
```

**Arguments**

**name:** name of double parameter or double attribute.  
**vars:** a list of interested variables.

**Return**

values of parameter or attribute.

**18.2.3.54 Model.get()**

Query values of double parameter or double attribute, associated

**Synopsis**

```
double[] get(String name, VarArray vars)
```

**Arguments**

**name:** name of double parameter or double attribute.  
**vars:** array of interested variables.

**Return**

values of parameter or attribute.

#### 18.2.3.55 Model.get()

Query values of parameter or attribute, associated with

##### Synopsis

```
double[] get(String name, Constraint[] constrs)
```

##### Arguments

**name:** name of double parameter or double attribute.

**constrs:** a list of interested constraints.

##### Return

values of parameter or attribute.

#### 18.2.3.56 Model.get()

Query values of parameter or attribute, associated with

##### Synopsis

```
double[] get(String name, ConstrArray constrs)
```

##### Arguments

**name:** name of double parameter or double attribute.

**constrs:** array of interested constraints.

##### Return

values of parameter or attribute.

#### 18.2.3.57 Model.get()

Query values of parameter or attribute, associated with

##### Synopsis

```
double[] get(String name, QConstraint[] constrs)
```

##### Arguments

**name:** name of double parameter or double attribute.

**constrs:** a list of interested quadratic constraints.

##### Return

values of parameter or attribute.

#### 18.2.3.58 Model.get()

Query values of parameter or attribute, associated with

##### Synopsis

```
double[] get(String name, QConstrArray constrs)
```

##### Arguments

**name:** name of double parameter or double attribute.

**constrs:** array of interested quadratic constraints.

##### Return

values of parameter or attribute.

#### **18.2.3.59 Model.get()**

Query values of parameter or attribute, associated with PSD

##### **Synopsis**

```
double[] get(String name, PsdConstraint[] constrs)
```

##### **Arguments**

**name:** name of double parameter or attribute.

**constrs:** a list of desired PSD constraints.

##### **Return**

output array of parameter or attribute values.

#### **18.2.3.60 Model.get()**

Query values of parameter or attribute, associated with PSD

##### **Synopsis**

```
double[] get(String name, PsdConstrArray constrs)
```

##### **Arguments**

**name:** name of double parameter or attribute.

**constrs:** a list of desired PSD constraints.

##### **Return**

output array of parameter or attribute values.

#### **18.2.3.61 Model.getCoeff()**

Get the coefficient of variable in linear constraint.

##### **Synopsis**

```
double getCoeff(Constraint constr, Var var)
```

##### **Arguments**

**constr:** The requested constraint.

**var:** The requested variable.

##### **Return**

The requested coefficient.

**18.2.3.62 Model.getCol()**

Get a column object that have a list of constraints in which the

**Synopsis**

```
Column getCol(Var var)
```

**Arguments**

`var`: a variable object.

**Return**

a column object associated with a variable.

**18.2.3.63 Model.getColBasis()**

Get status of column basis.

**Synopsis**

```
int[] getColBasis()
```

**Return**

basis status.

**18.2.3.64 Model.getCone()**

Get a cone constraint of given index in model.

**Synopsis**

```
Cone getCone(int idx)
```

**Arguments**

`idx`: index of the desired cone constraint.

**Return**

the desired cone constraint object.

**18.2.3.65 Model.getConeBuilders()**

Get builders of all cone constraints in model.

**Synopsis**

```
ConeBuilderArray getConeBuilders()
```

**Return**

array object of cone constraint builders.



**18.2.3.66 Model.getConeBuilders()**

Get builders of given cone constraints in model.

**Synopsis**

```
ConeBuilderArray getConeBuilders(Cone[] cones)
```

**Arguments**

`cones`: array of cone constraints.

**Return**

array object of desired cone constraint builders.

**18.2.3.67 Model.getConeBuilders()**

Get builders of given cone constraints in model.

**Synopsis**

```
ConeBuilderArray getConeBuilders(ConeArray cones)
```

**Arguments**

`cones`: array of cone constraints.

**Return**

array object of desired cone constraint builders.

**18.2.3.68 Model.getCones()**

Get all cone constraints in model.

**Synopsis**

```
ConeArray getCones()
```

**Return**

array object of cone constraints.

**18.2.3.69 Model.getConstr()**

Get a constraint of given index in model.

**Synopsis**

```
Constraint getConstr(int idx)
```

**Arguments**

`idx`: index of the desired constraint.

**Return**

the desired constraint object.

**18.2.3.70 Model.getConstrBuilder()**

Get builder of a constraint in model, including variables and

**Synopsis**

```
ConstrBuilder getConstrBuilder(Constraint constr)
```

**Arguments**

`constr`: a constraint object.

**Return**

constraint builder object.

**18.2.3.71 Model.getConstrBuilders()**

Get builders of all constraints in model.

**Synopsis**

```
ConstrBuilderArray getConstrBuilders()
```

**Return**

array object of constraint builders.

**18.2.3.72 Model.getConstrByName()**

Get a constraint of given name in model.

**Synopsis**

```
Constraint getConstrByName(String name)
```

**Arguments**

`name`: name of the desired constraint.

**Return**

the desired constraint object.

**18.2.3.73 Model.getConstrLowerIIS()**

Get IIS status of lower bounds of constraints.

**Synopsis**

```
int[] getConstrLowerIIS(ConstrArray constrs)
```

**Arguments**

`constrs`: Array of constraints.

**Return**

IIS status of lower bounds of constraints.

#### 18.2.3.74 **Model.getConstrLowerIIS()**

Get IIS status of lower bounds of constraints.

##### **Synopsis**

```
int[] getConstrLowerIIS(Constraint[] constra)
```

##### **Arguments**

constra: Array of constraints.

##### **Return**

IIS status of lower bounds of constraints.

#### 18.2.3.75 **Model.getConstrs()**

Get all constraints in model.

##### **Synopsis**

```
ConstrArray getConstrs()
```

##### **Return**

array object of constraints.

#### 18.2.3.76 **Model.getConstrUpperIIS()**

Get IIS status of upper bounds of constraints.

##### **Synopsis**

```
int[] getConstrUpperIIS(ConstrArray constra)
```

##### **Arguments**

constra: Array of constraints.

##### **Return**

IIS status of upper bounds of constraints.

#### 18.2.3.77 **Model.getConstrUpperIIS()**

Get IIS status of upper bounds of constraints.

##### **Synopsis**

```
int[] getConstrUpperIIS(Constraint[] constra)
```

##### **Arguments**

constra: Array of constraints.

##### **Return**

IIS status of upper bounds of constraints.

**18.2.3.78 Model.getDblAttr()**

Get value of a COPT double attribute.

**Synopsis**

```
double getDblAttr(String attr)
```

**Arguments**

**attr:** name of double attribute.

**Return**

value of double attribute.

**18.2.3.79 Model.getDblParam()**

Get value of a COPT double parameter.

**Synopsis**

```
double getDblParam(String param)
```

**Arguments**

**param:** name of double parameter.

**Return**

value of double parameter.

**18.2.3.80 Model.getDblParamInfo()**

Get current, default, minimum, maximum of COPT double parameter.

**Synopsis**

```
double[] getDblParamInfo(String name)
```

**Arguments**

**name:** name of integer parameter.

**Return**

current, default, minimum, maximum of COPT double parameter.

**18.2.3.81 Model.getGenConstrIndicator()**

Get builder of given general constraint of type indicator.

**Synopsis**

```
GenConstrBuilder getGenConstrIndicator(GenConstr indicator)
```

**Arguments**

**indicator:** a general constraint of type indicator.

**Return**

builder object of general constraint of type indicator.

**18.2.3.82 Model.getIndicatorIIS()**

Get IIS status of indicator constraints.

**Synopsis**

```
int[] getIndicatorIIS(GenConstrArray genconstrs)
```

**Arguments**

genconstrs: Array of indicator constraints.

**Return**

IIS status of indicator constraints.

**18.2.3.83 Model.getIndicatorIIS()**

Get IIS status of indicator constraints.

**Synopsis**

```
int[] getIndicatorIIS(GenConstr[] genconstrs)
```

**Arguments**

genconstrs: Array of indicator constraints.

**Return**

IIS status of indicator constraints.

**18.2.3.84 Model.getIntAttr()**

Get value of a COPT integer attribute

**Synopsis**

```
int getIntAttr(String attr)
```

**Arguments**

attr: name of integer attribute.

**Return**

value of integer attribute.

**18.2.3.85 Model.getIntParam()**

Get value of a COPT integer parameter.

**Synopsis**

```
int getIntParam(String param)
```

**Arguments**

param: name of integer parameter.

**Return**

value of integer parameter.

**18.2.3.86 Model.getIntParamInfo()**

Get current, default, minimum, maximum of COPT integer parameter.

**Synopsis**

```
int[] getIntParamInfo(String name)
```

**Arguments**

**name:** name of integer parameter.

**Return**

current, default, minimum, maximum of COPT integer parameter.

**18.2.3.87 Model.getLpSolution()**

Get LP solution.

**Synopsis**

```
Object[] getLpSolution()
```

**Return**

solution, slack, dual and reduced values.

**18.2.3.88 Model.getObjective()**

Get linear expression of objective for model.

**Synopsis**

```
Expr getObjective()
```

**Return**

an linear expression object.

**18.2.3.89 Model.getPoolObjVal()**

Get the idx-th objective value in solution pool.

**Synopsis**

```
double getPoolObjVal(int idx)
```

**Arguments**

**idx:** Index of solution.

**Return**

The requested objective value.

**18.2.3.90 Model.getPoolSolution()**

Get the idx-th solution in solution pool.

**Synopsis**

```
double[] getPoolSolution(int idx, VarArray vars)
```

**Arguments**

**idx:** Index of solution.

**vars:** The requested variables.

**Return**

The requested solution.

**18.2.3.91 Model.getPoolSolution()**

Get the idx-th solution in solution pool.

**Synopsis**

```
double[] getPoolSolution(int idx, Var[] vars)
```

**Arguments**

**idx:** Index of solution.

**vars:** The requested variables.

**Return**

The requested solution.

**18.2.3.92 Model.getPsdCoeff()**

Get the symmetric matrix of PSD variable in a PSD constraint.

**Synopsis**

```
SymMatrix getPsdCoeff(PsdConstraint constr, PsdVar var)
```

**Arguments**

**constr:** The desired PSD constraint.

**var:** The desired PSD variable.

**Return**

The associated coefficient matrix.

**18.2.3.93 Model.getPsdConstr()**

Get a quadratic constraint of given index in model.

**Synopsis**

```
PsdConstraint getPsdConstr(int idx)
```

**Arguments**

**idx:** index of the desired quadratic constraint.

**Return**

the desired quadratic constraint object.

**18.2.3.94 Model.getPsdConstrBuilder()**

Get builder of a PSD constraint in model, including PSD variables,

**Synopsis**

```
PsdConstrBuilder getPsdConstrBuilder(PsdConstraint constr)
```

**Arguments**

constr: a PSD constraint object.

**Return**

PSD constraint builder object.

**18.2.3.95 Model.getPsdConstrBuilders()**

Get builders of all PSD constraints in model.

**Synopsis**

```
PsdConstrBuilderArray getPsdConstrBuilders()
```

**Return**

array object of PSD constraint builders.

**18.2.3.96 Model.getPsdConstrByName()**

Get a quadratic constraint of given name in model.

**Synopsis**

```
PsdConstraint getPsdConstrByName(String name)
```

**Arguments**

name: name of the desired constraint.

**Return**

the desired quadratic constraint object.

**18.2.3.97 Model.getPsdConstrs()**

Get all PSD constraints in model.

**Synopsis**

```
PsdConstrArray getPsdConstrs()
```

**Return**

array object of PSD constraints.



**18.2.3.98 Model.getPsdObjective()**

Get PSD objective of model.

**Synopsis**

```
PsdExpr getPsdObjective()
```

**Return**

a PSD expression object.

**18.2.3.99 Model.getPsdRow()**

Get PSD variables and associated symmetric matrix that participate

**Synopsis**

```
PsdExpr getPsdRow(PsdConstraint constr)
```

**Arguments**

`constr`: a PSD constraint object.

**Return**

PSD expression object of the PSD constraint.

**18.2.3.100 Model.getPsdVar()**

Get a PSD variable of given index in model.

**Synopsis**

```
PsdVar getPsdVar(int idx)
```

**Arguments**

`idx`: index of the desired PSD variable.

**Return**

the desired PSD variable object.

**18.2.3.101 Model.getPsdVarByName()**

Get a PSD variable of given name in model.

**Synopsis**

```
PsdVar getPsdVarByName(String name)
```

**Arguments**

`name`: name of the desired PSD variable.

**Return**

the desired PSD variable object.

**18.2.3.102 Model.getPsdVars()**

Get all PSD variables in model.

**Synopsis**

```
PsdVarArray getPsdVars()
```

**Return**

array object of PSD variables.

**18.2.3.103 Model.getQConstr()**

Get a quadratic constraint of given index in model.

**Synopsis**

```
QConstraint getQConstr(int idx)
```

**Arguments**

idx: index of the desired quadratic constraint.

**Return**

the desired quadratic constraint object.

**18.2.3.104 Model.getQConstrBuilder()**

Get builder of a quadratic constraint in model, including variables and associated coefficients, sense and RHS.

**Synopsis**

```
QConstrBuilder getQConstrBuilder(QConstraint constr)
```

**Arguments**

constr: a constraint object.

**Return**

constraint builder object.

**18.2.3.105 Model.getQConstrBuilders()**

Get builders of all constraints in model.

**Synopsis**

```
QConstrBuilderArray getQConstrBuilders()
```

**Return**

array object of constraint builders.

**18.2.3.106 Model.getQConstrByName()**

Get a quadratic constraint of given name in model.

**Synopsis**

```
QConstraint getQConstrByName(String name)
```

**Arguments**

**name:** name of the desired constraint.

**Return**

the desired quadratic constraint object.

**18.2.3.107 Model.getQConstrs()**

Get all quadratic constraints in model.

**Synopsis**

```
QConstrArray getQConstrs()
```

**Return**

array object of quadratic constraints.

**18.2.3.108 Model.getQuadObjective()**

Get quadratic objective of model.

**Synopsis**

```
QuadExpr getQuadObjective()
```

**Return**

a quadratic expression object.

**18.2.3.109 Model.getQuadRow()**

Get quadratic expression that participate in quadratic constraint.

**Synopsis**

```
QuadExpr getQuadRow(QConstraint constr)
```

**Arguments**

**constr:** a quadratic constraint object.

**Return**

quadratic expression object of the constraint.

**18.2.3.110 Model.getRow()**

Get variables that participate in a constraint, and the associated

**Synopsis**

```
Expr getRow(Constraint constr)
```

**Arguments**

`constr`: a constraint object.

**Return**

expression object of the constraint.

**18.2.3.111 Model.getRowBasis()**

Get status of row basis.

**Synopsis**

```
int[] getRowBasis()
```

**Return**

basis status.

**18.2.3.112 Model.getSolution()**

Get MIP solution.

**Synopsis**

```
double[] getSolution()
```

**Return**

solution values.

**18.2.3.113 Model.getSos()**

Get a SOS constraint of given index in model.

**Synopsis**

```
Sos getSos(int idx)
```

**Arguments**

`idx`: index of the desired SOS constraint.

**Return**

the desired SOS constraint object.

**18.2.3.114 Model.getSosBuilders()**

Get builders of all SOS constraints in model.

**Synopsis**

```
SosBuilderArray getSosBuilders()
```

**Return**

array object of SOS constraint builders.

**18.2.3.115 Model.getSosBuilders()**

Get builders of given SOS constraints in model.

**Synopsis**

```
SosBuilderArray getSosBuilders(Sos[] soss)
```

**Arguments**

**soss**: array of SOS constraints.

**Return**

array object of desired SOS constraint builders.

**18.2.3.116 Model.getSosBuilders()**

Get builders of given SOS constraints in model.

**Synopsis**

```
SosBuilderArray getSosBuilders(SosArray soss)
```

**Arguments**

**soss**: array of SOS constraints.

**Return**

array object of desired SOS constraint builders.

**18.2.3.117 Model.getSOSIIS()**

Get IIS status of SOS constraints.

**Synopsis**

```
int[] getSOSIIS(SosArray soss)
```

**Arguments**

**soss**: Array of SOS constraints.

**Return**

IIS status of SOS constraints.

**18.2.3.118 Model.getSOSIIS()**

Get IIS status of SOS constraints.

**Synopsis**

```
int[] getSOSIIS(Sos[] soss)
```

**Arguments**

soss: Array of SOS constraints.

**Return**

IIS status of SOS constraints.

**18.2.3.119 Model.getSoss()**

Get all SOS constraints in model.

**Synopsis**

```
SosArray getSoss()
```

**Return**

array object of SOS constraints.

**18.2.3.120 Model.getSymMat()**

Get a symmetric matrix of given index in model.

**Synopsis**

```
SymMatrix getSymMat(int idx)
```

**Arguments**

idx: index of the desired symmetric matrix.

**Return**

the desired symmetric matrix object.

**18.2.3.121 Model.getVar()**

Get a variable of given index in model.

**Synopsis**

```
Var getVar(int idx)
```

**Arguments**

idx: index of the desired variable.

**Return**

the desired variable object.

**18.2.3.122 Model.getVarByName()**

Get a variable of given name in model.

**Synopsis**

```
Var getVarByName(String name)
```

**Arguments**

**name:** name of the desired variable.

**Return**

the desired variable object.

**18.2.3.123 Model.getVarLowerIIS()**

Get IIS status of lower bounds of variables.

**Synopsis**

```
int[] getVarLowerIIS(VarArray vars)
```

**Arguments**

**vars:** Array of variables.

**Return**

IIS status of lower bounds of variables.

**18.2.3.124 Model.getVarLowerIIS()**

Get IIS status of lower bounds of variables.

**Synopsis**

```
int[] getVarLowerIIS(Var[] vars)
```

**Arguments**

**vars:** Array of variables.

**Return**

IIS status of lower bounds of variables.

**18.2.3.125 Model.getVars()**

Get all variables in model.

**Synopsis**

```
VarArray getVars()
```

**Return**

variable array object.

**18.2.3.126 Model.getVarUpperIIS()**

Get IIS status of upper bounds of variables.

**Synopsis**

```
int[] getVarUpperIIS(VarArray vars)
```

**Arguments**

**vars:** Array of variables.

**Return**

IIS status of upper bounds of variables.

**18.2.3.127 Model.getVarUpperIIS()**

Get IIS status of upper bounds of variables.

**Synopsis**

```
int[] getVarUpperIIS(Var[] vars)
```

**Arguments**

**vars:** Array of variables.

**Return**

IIS status of upper bounds of variables.

**18.2.3.128 Model.interrupt()**

Interrupt optimization of current problem.

**Synopsis**

```
void interrupt()
```

**18.2.3.129 Model.loadMipStart()**

Load final initial values of variables to the problem.

**Synopsis**

```
void loadMipStart()
```

**18.2.3.130 Model.loadTuneParam()**

Load specified tuned parameters into model.

**Synopsis**

```
void loadTuneParam(int idx)
```

**Arguments**

**idx:** Index of tuned parameters.



#### 18.2.3.131 Model.read()

Read problem, solution, basis, MIP start or COPT parameters from

##### Synopsis

```
void read(String filename)
```

##### Arguments

filename: an input file name.

#### 18.2.3.132 Model.readBasis()

Read basis from file.

##### Synopsis

```
void readBasis(String filename)
```

##### Arguments

filename: an input file name.

#### 18.2.3.133 Model.readBin()

Read problem in COPT binary format from file.

##### Synopsis

```
void readBin(String filename)
```

##### Arguments

filename: an input file name.

#### 18.2.3.134 Model.readCbf()

Read problem in CBF format from file.

##### Synopsis

```
void readCbf(String filename)
```

##### Arguments

filename: an input file name.

#### 18.2.3.135 Model.readLp()

Read problem in LP format from file.

##### Synopsis

```
void readLp(String filename)
```

##### Arguments

filename: an input file name.

**18.2.3.136 Model.readMps()**

Read problem in MPS format from file.

**Synopsis**

```
void readMps(String filename)
```

**Arguments**

filename: an input file name.

**18.2.3.137 Model.readMst()**

Read MIP start information from file.

**Synopsis**

```
void readMst(String filename)
```

**Arguments**

filename: an input file name.

**18.2.3.138 Model.readParam()**

Read COPT parameters from file.

**Synopsis**

```
void readParam(String filename)
```

**Arguments**

filename: an input file name.

**18.2.3.139 Model.readSdpa()**

Read problem in SDPA format from file.

**Synopsis**

```
void readSdpa(String filename)
```

**Arguments**

filename: an input file name.

**18.2.3.140 Model.readSol()**

Read solution from file.

**Synopsis**

```
void readSol(String filename)
```

**Arguments**

filename: an input file name.

**18.2.3.141 Model.readTune()**

Read tuning parameters from file.

**Synopsis**

```
void readTune(String filename)
```

**Arguments**

filename: an input file name.

**18.2.3.142 Model.remove()**

Remove an array of variables from model.

**Synopsis**

```
void remove(Var[] vars)
```

**Arguments**

vars: a list of variables.

**18.2.3.143 Model.remove()**

Remove array of variables from model.

**Synopsis**

```
void remove(VarArray vars)
```

**Arguments**

vars: an array of variables.

**18.2.3.144 Model.remove()**

Remove a list of constraints from model.

**Synopsis**

```
void remove(Constraint[] constra)
```

**Arguments**

constra: a list of constraints.

**18.2.3.145 Model.remove()**

Remove a list of constraints from model.

**Synopsis**

```
void remove(ConstrArray constra)
```

**Arguments**

constra: an array of constraints.

**18.2.3.146 Model.remove()**

Remove a list of SOS constraints from model.

**Synopsis**

```
void remove(Sos[] soss)
```

**Arguments**

**soss**: a list of SOS constraints.

**18.2.3.147 Model.remove()**

Remove a list of SOS constraints from model.

**Synopsis**

```
void remove(SosArray soss)
```

**Arguments**

**soss**: an array of SOS constraints.

**18.2.3.148 Model.remove()**

Remove a list of Cone constraints from model.

**Synopsis**

```
void remove(Cone[] cones)
```

**Arguments**

**cones**: a list of Cone constraints.

**18.2.3.149 Model.remove()**

Remove a list of Cone constraints from model.

**Synopsis**

```
void remove(ConeArray cones)
```

**Arguments**

**cones**: an array of Cone constraints.

**18.2.3.150 Model.remove()**

Remove a list of gernal constraints from model.

**Synopsis**

```
void remove(GenConstr[] genConstrs)
```

**Arguments**

**genConstrs**: a list of general constraints.

**18.2.3.151 Model.remove()**

Remove a list of gernal constraints from model.

**Synopsis**

```
void remove(GenConstrArray genConstrs)
```

**Arguments**

genConstrs: an array of general constraints.

**18.2.3.152 Model.remove()**

Remove a list of quadratic constraints from model.

**Synopsis**

```
void remove(QConstraint[] qconstrs)
```

**Arguments**

qconstrs: an array of quadratic constraints.

**18.2.3.153 Model.remove()**

Remove a list of quadratic constraints from model.

**Synopsis**

```
void remove(QConstrArray qconstrs)
```

**Arguments**

qconstrs: an array of quadratic constraints.

**18.2.3.154 Model.remove()**

Remove a list of PSD variables from model.

**Synopsis**

```
void remove(PsdVar[] vars)
```

**Arguments**

vars: an array of PSD variables.

**18.2.3.155 Model.remove()**

Remove a list of PSD variables from model.

**Synopsis**

```
void remove(PsdVarArray vars)
```

**Arguments**

vars: an array of PSD variables.

**18.2.3.156 Model.remove()**

Remove a list of PSD constraints from model.

**Synopsis**

```
void remove(PsdConstraint[] constrs)
```

**Arguments**

constrs: an array of PSD constraints.

**18.2.3.157 Model.remove()**

Remove a list of PSD constraints from model.

**Synopsis**

```
void remove(PsdConstrArray constrs)
```

**Arguments**

constrs: an array of PSD constraints.

**18.2.3.158 Model.reset()**

Reset solution only.

**Synopsis**

```
void reset()
```

**18.2.3.159 Model.resetAll()**

Reset solution and additional information.

**Synopsis**

```
void resetAll()
```

**18.2.3.160 Model.resetParam()**

Reset parameters to default settings.

**Synopsis**

```
void resetParam()
```

**18.2.3.161 Model.set()**

Set values of double parameter or double attribute, associated with

**Synopsis**

```
void set(  
    String name,  
    Var[] vars,  
    double[] vals)
```

**Arguments**

**name:** name of double parameter or double attribute.

**vars:** a list of interested variables.

**vals:** values of parameter or attribute.

#### 18.2.3.162 **Model.set()**

Set values of double parameter or double attribute, associated with

##### **Synopsis**

```
void set(  
    String name,  
    VarArray vars,  
    double[] vals)
```

##### **Arguments**

**name:** name of double parameter or double attribute.

**vars:** array of interested variables.

**vals:** values of parameter or attribute.

#### 18.2.3.163 **Model.set()**

Set values of parameter or attribute, associated with constraints.

##### **Synopsis**

```
void set(  
    String name,  
    Constraint[] constrs,  
    double[] vals)
```

##### **Arguments**

**name:** name of double parameter or double attribute.

**constrs:** a list of interested constraints.

**vals:** values of parameter or attribute.

#### 18.2.3.164 **Model.set()**

Set values of parameter or attribute, associated with constraints.

##### **Synopsis**

```
void set(  
    String name,  
    ConstrArray constrs,  
    double[] vals)
```

##### **Arguments**

**name:** name of double parameter or double attribute.

**constrs:** array of interested constraints.

**vals:** values of parameter or attribute.

**18.2.3.165 Model.set()**

Set values of parameter, associated with PSD constraints.

**Synopsis**

```
void set(  
    String name,  
    PsdConstraint[] constrs,  
    double[] vals)
```

**Arguments**

**name:** name of double parameter.  
**constrs:** a list of desired PSD constraints.  
**vals:** array of values of parameter.

**18.2.3.166 Model.set()**

Set values of parameter, associated with PSD constraints.

**Synopsis**

```
void set(  
    String name,  
    PsdConstrArray constrs,  
    double[] vals)
```

**Arguments**

**name:** name of double parameter.  
**constrs:** a list of desired PSD constraints.  
**vals:** array of values of parameter.

**18.2.3.167 Model.setBasis()**

Set column and row basis status to model.

**Synopsis**

```
void setBasis(int[] colbasis, int[] rowbasis)
```

**Arguments**

**colbasis:** status of column basis.  
**rowbasis:** status of row basis.



**18.2.3.168 Model.setCoeff()**

Set the coefficient of a variable in a linear constraint.

**Synopsis**

```
void setCoeff(  
    Constraint constr,  
    Var var,  
    double newVal)
```

**Arguments**

**constr:** The requested constraint.

**var:** The requested variable.

**newVal:** New coefficient.

**18.2.3.169 Model.setDblParam()**

Set value of a COPT double parameter.

**Synopsis**

```
void setDblParam(String param, double val)
```

**Arguments**

**param:** name of double parameter.

**val:** double value.

**18.2.3.170 Model.setIntParam()**

Set value of a COPT integer parameter.

**Synopsis**

```
void setIntParam(String param, int val)
```

**Arguments**

**param:** name of integer parameter.

**val:** integer value.

**18.2.3.171 Model.setLpSolution()**

Set LP solution.

**Synopsis**

```
void setLpSolution(  
    double[] value,  
    double[] slack,  
    double[] rowDual,  
    double[] redCost)
```

**Arguments**

`value`: solution of variables.  
`slack`: solution of slack variables.  
`rowDual`: dual value of slack variables.  
`redCost`: dual value of variables.

#### 18.2.3.172 `Model.setMipStart()`

Set initial values for variables of given number, starting from the

##### Synopsis

```
void setMipStart(int count, double[] vals)
```

##### Arguments

`count`: the number of variables to set.  
`vals`: values of variables.

#### 18.2.3.173 `Model.setMipStart()`

Set initial value for the specified variable.

##### Synopsis

```
void setMipStart(Var var, double val)
```

##### Arguments

`var`: an interested variable.  
`val`: initial value of the variable.

#### 18.2.3.174 `Model.setMipStart()`

Set initial value for the specified variable.

##### Synopsis

```
void setMipStart(Var[] vars, double[] vals)
```

##### Arguments

`vars`: a list of interested variables.  
`vals`: initial values of the variables.

#### 18.2.3.175 `Model.setMipStart()`

Set initial values for an array of variables.

##### Synopsis

```
void setMipStart(VarArray vars, double[] vals)
```

##### Arguments

`vars`: a list of interested variables.  
`vals`: initial values of variables.

**18.2.3.176 Model.setObjConst()**

Set objective constant.

**Synopsis**

```
void setObjConst(double constant)
```

**Arguments**

**constant:** constant value to set.

**18.2.3.177 Model.setObjective()**

Set objective for model.

**Synopsis**

```
void setObjective(Expr expr, int sense)
```

**Arguments**

**expr:** expression of the objective.

**sense:** COPT\_MINIMIZE for minimization and COPT\_MAXIMIZE for

**18.2.3.178 Model.setObjSense()**

Set objective sense for model.

**Synopsis**

```
void setObjSense(int sense)
```

**Arguments**

**sense:** the objective sense.

**18.2.3.179 Model.setPsdCoeff()**

Set the coefficient matrix of a PSD variable in a PSD constraint.

**Synopsis**

```
void setPsdCoeff(  
    PsdConstraint constr,  
    PsdVar var,  
    SymMatrix mat)
```

**Arguments**

**constr:** The desired PSD constraint.

**var:** The desired PSD variable.

**mat:** new coefficient matrix.

**18.2.3.180 Model.setPsdObjective()**

Set PSD objective for model.

**Synopsis**

```
void setPsdObjective(PsdExpr expr, int sense)
```

**Arguments**

**expr:** PSD expression of the objective.

**sense:** COPT sense.

**18.2.3.181 Model.setQuadObjective()**

Set quadratic objective for model.

**Synopsis**

```
void setQuadObjective(QuadExpr expr, int sense)
```

**Arguments**

**expr:** quadratic expression of the objective.

**sense:** default value 0 does not change COPT sense.

**18.2.3.182 Model.setSlackBasis()**

Set slack basis to model.

**Synopsis**

```
void setSlackBasis()
```

**18.2.3.183 Model.setSolverLogFile()**

Set log file for COPT.

**Synopsis**

```
void setSolverLogFile(String filename)
```

**Arguments**

**filename:** log file name.

**18.2.3.184 Model.solve()**

Solve the model as MIP.

**Synopsis**

```
void solve()
```

**18.2.3.185 Model.solveLp()**

Solve the model as LP.

**Synopsis**

```
void solveLp()
```

**18.2.3.186 Model.tune()**

Tune model.

**Synopsis**

```
void tune()
```

**18.2.3.187 Model.write()**

Output problem, solution, basis, MIP start or modified COPT

**Synopsis**

```
void write(String filename)
```

**Arguments**

filename: an output file name.

**18.2.3.188 Model.writeBasis()**

Output optimal basis to a file of type '.bas'.

**Synopsis**

```
void writeBasis(String filename)
```

**Arguments**

filename: an output file name.

**18.2.3.189 Model.writeBin()**

Output problem to a file as COPT binary format.

**Synopsis**

```
void writeBin(String filename)
```

**Arguments**

filename: an output file name.

**18.2.3.190 Model.writeIIS()**

Output IIS to file.

**Synopsis**

```
void writeIIS(String filename)
```

**Arguments**

filename: Output file name.

**18.2.3.191 Model.writeLp()**

Output problem to a file as LP format.

**Synopsis**

```
void writeLp(String filename)
```

**Arguments**

filename: an output file name.

**18.2.3.192 Model.writeMps()**

Output problem to a file as MPS format.

**Synopsis**

```
void writeMps(String filename)
```

**Arguments**

filename: an output file name.

**18.2.3.193 Model.writeMpsStr()**

Output MPS problem to problem buffer.

**Synopsis**

```
ProbBuffer writeMpsStr()
```

**Return**

problem buffer for string of MPS problem.

**18.2.3.194 Model.writeMst()**

Output MIP start information to a file of type '.mst'.

**Synopsis**

```
void writeMst(String filename)
```

**Arguments**

filename: an output file name.

**18.2.3.195 Model.writeParam()**

Output modified COPT parameters to a file of type '.par'.

**Synopsis**

```
void writeParam(String filename)
```

**Arguments**

filename: an output file name.

**18.2.3.196 Model.writePoolSol()**

Output selected pool solution to a file of type '.sol'.

**Synopsis**

```
void writePoolSol(int idx, String filename)
```

**Arguments**

idx: index of pool solution.

filename: an output file name.

**18.2.3.197 Model.writeRelax()**

Output feasibility relaxation problem to file.

**Synopsis**

```
void writeRelax(String filename)
```

**Arguments**

filename: Output file name.

**18.2.3.198 Model.writeSol()**

Output solution to a file of type '.sol'.

**Synopsis**

```
void writeSol(String filename)
```

**Arguments**

filename: an output file name.

**18.2.3.199 Model.writeTuneParam()**

Output specified tuned parameters to a file of type '.par'.

**Synopsis**

```
void writeTuneParam(int idx, String filename)
```

**Arguments**

idx: Index of tuned parameters.

filename: Output file name.

**18.2.4 Var**

COPT variable object. Variables are always associated with a particular model. User creates a variable object by adding a variable to a model, rather than by using constructor of Var class.

#### 18.2.4.1 Var.get()

Get attribute value of the variable. Support “Value”, “RedCost”, “LB”, “UB”, and “Obj” attributes.

##### Synopsis

```
double get(String attr)
```

##### Arguments

attr: attribute name.

##### Return

attribute value.

#### 18.2.4.2 Var.getBasis()

Get basis status of the variable.

##### Synopsis

```
int getBasis()
```

##### Return

Basis status.

#### 18.2.4.3 Var.getIdx()

Get index of the variable.

##### Synopsis

```
int getIdx()
```

##### Return

variable index.

#### 18.2.4.4 Var.getLowerIIS()

Get IIS status for lower bound of the variable.

##### Synopsis

```
int getLowerIIS()
```

##### Return

IIS status.

#### 18.2.4.5 Var.getName()

Get name of the variable.

##### Synopsis

```
String getName()
```

##### Return

variable name.



**18.2.4.6 Var.getType()**

Get type of the variable.

**Synopsis**

```
char getType()
```

**Return**

variable type.

**18.2.4.7 Var.getUpperIIS()**

Get IIS status for upper bound of the variable.

**Synopsis**

```
int getUpperIIS()
```

**Return**

IIS status.

**18.2.4.8 Var.remove()**

Remove variable from model.

**Synopsis**

```
void remove()
```

**18.2.4.9 Var.set()**

Set attribute value of the variable. Support “LB”, “UB” and “Obj” attributes.

**Synopsis**

```
void set(String attr, double val)
```

**Arguments**

**attr**: attribute name.

**val**: new value.

**18.2.4.10 Var.setName()**

Set name of the variable.

**Synopsis**

```
void setName(String name)
```

**Arguments**

**name**: variable name.

#### 18.2.4.11 **Var.setType()**

Set type of the variable.

##### **Synopsis**

```
void setType(char vtype)
```

##### **Arguments**

vtype: variable type.

### 18.2.5 **VarArray**

COPT variable array object. To store and access a set of Java *Var* objects, Cardinal Optimizer provides Java VarArray class, which defines the following methods.

#### 18.2.5.1 **VarArray.VarArray()**

Constructor of vararray.

##### **Synopsis**

```
VarArray()
```

#### 18.2.5.2 **VarArray.getVar()**

Get idx-th variable object.

##### **Synopsis**

```
Var getVar(int idx)
```

##### **Arguments**

idx: index of the variable.

##### **Return**

variable object with index idx.

#### 18.2.5.3 **VarArray.pushBack()**

Add a variable object to variable array.

##### **Synopsis**

```
void pushBack(Var var)
```

##### **Arguments**

var: a variable object.

#### **18.2.5.4 VarArray.size()**

Get the number of variable objects.

##### **Synopsis**

```
int size()
```

##### **Return**

number of variable objects.

### **18.2.6 Expr**

COPT linear expression object. A linear expression consists of a constant term, a list of terms of variables and associated coefficients. Linear expressions are used to build constraints.

#### **18.2.6.1 Expr.Expr()**

Constructor of a constant linear expression with constant 0.0

##### **Synopsis**

```
Expr()
```

#### **18.2.6.2 Expr.Expr()**

Constructor of a constant linear expression.

##### **Synopsis**

```
Expr(double constant)
```

##### **Arguments**

**constant:** constant value in expression object.

#### **18.2.6.3 Expr.Expr()**

Constructor of a linear expression with one term.

##### **Synopsis**

```
Expr(Var var)
```

##### **Arguments**

**var:** variable for the added term.

#### **18.2.6.4 Expr.Expr()**

Constructor of a linear expression with one term.

##### **Synopsis**

```
Expr(Var var, double coeff)
```

##### **Arguments**

**var:** variable for the added term.

**coeff:** coefficient for the added term.

#### 18.2.6.5 Expr.addConstant()

Add extra constant to the expression.

##### Synopsis

```
void addConstant(double constant)
```

##### Arguments

constant: delta value to be added to expression constant.

#### 18.2.6.6 Expr.addExpr()

Add a linear expression to self.

##### Synopsis

```
void addExpr(Expr expr)
```

##### Arguments

expr: linear expression to be added.

#### 18.2.6.7 Expr.addExpr()

Add a linear expression to self.

##### Synopsis

```
void addExpr(Expr expr, double mult)
```

##### Arguments

expr: linear expression to be added.

mult: multiplier constant.

#### 18.2.6.8 Expr.addTerm()

Add a term to expression object.

##### Synopsis

```
void addTerm(Var var, double coeff)
```

##### Arguments

var: a variable for new term.

coeff: coefficient for new term.

#### 18.2.6.9 Expr.addTerms()

Add terms to expression object.

##### Synopsis

```
void addTerms(Var[] vars, double coeff)
```

##### Arguments

vars: variables for added terms.

coeff: one coefficient for added terms.

**18.2.6.10 Expr.addTerms()**

Add terms to expression object.

**Synopsis**

```
void addTerms(Var[] vars, double[] coeffs)
```

**Arguments**

**vars:** variables for added terms.

**coeffs:** coefficients array for added terms.

**18.2.6.11 Expr.addTerms()**

Add terms to expression object.

**Synopsis**

```
void addTerms(VarArray vars, double coeff)
```

**Arguments**

**vars:** variables for added terms.

**coeff:** one coefficient for added terms.

**18.2.6.12 Expr.addTerms()**

Add terms to expression object.

**Synopsis**

```
void addTerms(VarArray vars, double[] coeffs)
```

**Arguments**

**vars:** variables for added terms.

**coeffs:** coefficients array for added terms.

**18.2.6.13 Expr.clone()**

Deep copy linear expression object.

**Synopsis**

```
Expr clone()
```

**Return**

cloned linear expression object.

**18.2.6.14 Expr.evaluate()**

evaluate linear expression after solving

**Synopsis**

```
double evaluate()
```

**Return**

value of linear expression

**18.2.6.15 Expr.getCoeff()**

Get coefficient from the i-th term in expression.

**Synopsis**

```
double getCoeff(int i)
```

**Arguments**

i: index of the term.

**Return**

coefficient of the i-th term in expression object.

**18.2.6.16 Expr.getConstant()**

Get constant in expression.

**Synopsis**

```
double getConstant()
```

**Return**

constant in expression.

**18.2.6.17 Expr.getVar()**

Get variable from the i-th term in expression.

**Synopsis**

```
Var getVar(int i)
```

**Arguments**

i: index of the term.

**Return**

variable of the i-th term in expression object.

**18.2.6.18 Expr.remove()**

Remove idx-th term from expression object.

**Synopsis**

```
void remove(int idx)
```

**Arguments**

idx: index of the term to be removed.

**18.2.6.19 Expr.remove()**

Remove the term associated with variable from expression.

**Synopsis**

```
void remove(Var var)
```

**Arguments**

**var:** a variable whose term should be removed.

**18.2.6.20 Expr.setCoeff()**

Set coefficient for the i-th term in expression.

**Synopsis**

```
void setCoeff(int i, double val)
```

**Arguments**

**i:** index of the term.

**val:** coefficient of the term.

**18.2.6.21 Expr.setConstant()**

Set constant for the expression.

**Synopsis**

```
void setConstant(double constant)
```

**Arguments**

**constant:** the value of the constant.

**18.2.6.22 Expr.size()**

Get number of terms in expression.

**Synopsis**

```
long size()
```

**Return**

number of terms.

**18.2.7 Constraint**

COPT constraint object. Constraints are always associated with a particular model. User creates a constraint object by adding a constraint to a model, rather than by using constructor of Constraint class.

#### 18.2.7.1 **Constraint.get()**

Get attribute value of the constraint. Support “Dual”, “Slack”, “LB”, “UB” attributes.

##### **Synopsis**

```
double get(String attr)
```

##### **Arguments**

**attr**: name of the attribute being queried.

##### **Return**

attribute value.

#### 18.2.7.2 **Constraint.getBasis()**

Get basis status of this constraint.

##### **Synopsis**

```
int getBasis()
```

##### **Return**

basis status.

#### 18.2.7.3 **Constraint.getIdx()**

Get index of the constraint.

##### **Synopsis**

```
int getIdx()
```

##### **Return**

the index of the constraint.

#### 18.2.7.4 **Constraint.getLowerIIS()**

Get IIS status for lower bound of the constraint.

##### **Synopsis**

```
int getLowerIIS()
```

##### **Return**

IIS status.

#### 18.2.7.5 **Constraint.getName()**

Get name of the constraint.

##### **Synopsis**

```
String getName()
```

##### **Return**

the name of the constraint.



#### 18.2.7.6 `Constraint.getUpperIIS()`

Get IIS status for upper bound of the constraint.

##### Synopsis

```
int getUpperIIS()
```

##### Return

IIS status.

#### 18.2.7.7 `Constraint.remove()`

Remove this constraint from model.

##### Synopsis

```
void remove()
```

#### 18.2.7.8 `Constraint.set()`

Set attribute value of the constraint. Support “LB” and “UB” attributes.

##### Synopsis

```
void set(String attr, double val)
```

##### Arguments

**attr**: name of the attribute.

**val**: new value.

#### 18.2.7.9 `Constraint.setName()`

Set name for the constraint.

##### Synopsis

```
void setName(String name)
```

##### Arguments

**name**: the name to set.

### 18.2.8 `ConstrArray`

COPT constraint array object. To store and access a set of Java *Constraint* objects, Cardinal Optimizer provides Java `ConstrArray` class, which defines the following methods.

#### 18.2.8.1 `ConstrArray.ConstrArray()`

Constructor of `constrarray` object.

##### Synopsis

```
ConstrArray()
```

#### 18.2.8.2 ConstrArray.getConstr()

Get idx-th constraint object.

##### Synopsis

```
Constraint getConstr(int idx)
```

##### Arguments

idx: index of the constraint.

##### Return

constraint object with index idx.

#### 18.2.8.3 ConstrArray.pushBack()

Add a constraint object to constraint array.

##### Synopsis

```
void pushBack(Constraint constr)
```

##### Arguments

constr: a constraint object.

#### 18.2.8.4 ConstrArray.size()

Get the number of constraint objects.

##### Synopsis

```
int size()
```

##### Return

number of constraint objects.

### 18.2.9 ConstrBuilder

COPT constraint builder object. To help building a constraint, given a linear expression, constraint sense and right-hand side value, Cardinal Optimizer provides Java ConstrBuilder class, which defines the following methods.

#### 18.2.9.1 ConstrBuilder.ConstrBuilder()

Constructor of constrbuilder object.

##### Synopsis

```
ConstrBuilder()
```

#### 18.2.9.2 ConstrBuilder.getExpr()

Get expression associated with constraint.

##### Synopsis

```
Expr getExpr()
```

##### Return

expression object.

#### 18.2.9.3 ConstrBuilder.getRange()

Get range from lower bound to upper bound of range constraint.

##### Synopsis

```
double getRange()
```

##### Return

length from lower bound to upper bound of the constraint.

#### 18.2.9.4 ConstrBuilder.getSense()

Get sense associated with constraint.

##### Synopsis

```
char getSense()
```

##### Return

constraint sense.

#### 18.2.9.5 ConstrBuilder.set()

Set detail of a constraint to its builder object.

##### Synopsis

```
void set(  
    Expr expr,  
    char sense,  
    double rhs)
```

##### Arguments

**expr**: expression object at one side of the constraint

**sense**: constraint sense other than COPT\_RANGE.

**rhs**: constant of right side of the constraint.

#### 18.2.9.6 ConstrBuilder.setRange()

Set a range constraint to its builder.

##### Synopsis

```
void setRange(Expr expr, double range)
```

##### Arguments

**expr:** expression object, whose constant is negative upper bound.

**range:** length from lower bound to upper bound of the constraint.

#### 18.2.10 ConstrBuilderArray

COPT constraint builder array object. To store and access a set of Java *ConstrBuilder* objects, Cardinal Optimizer provides Java *ConstrBuilderArray* class, which defines the following methods.

##### 18.2.10.1 ConstrBuilderArray.ConstrBuilderArray()

Constructor of constrbuilderarray object.

##### Synopsis

```
ConstrBuilderArray()
```

##### 18.2.10.2 ConstrBuilderArray.getBuilder()

Get idx-th constraint builder object.

##### Synopsis

```
ConstrBuilder getBuilder(int idx)
```

##### Arguments

**idx:** index of the constraint builder.

##### Return

constraint builder object with index idx.

##### 18.2.10.3 ConstrBuilderArray.pushBack()

Add a constraint builder object to constraint builder array.

##### Synopsis

```
void pushBack(ConstrBuilder builder)
```

##### Arguments

**builder:** a constraint builder object.

#### **18.2.10.4 ConstrBuilderArray.size()**

Get the number of constraint builder objects.

##### **Synopsis**

```
int size()
```

##### **Return**

number of constraint builder objects.

#### **18.2.11 Column**

COPT column object. A column consists of a list of constraints and associated coefficients. Columns are used to represent the set of constraints in which a variable participates, and the associated coefficients.

##### **18.2.11.1 Column.Column()**

Constructor of column.

##### **Synopsis**

```
Column()
```

##### **18.2.11.2 Column.addColumn()**

Add a column to self.

##### **Synopsis**

```
void addColumn(Column col)
```

##### **Arguments**

col: column object to be added.

##### **18.2.11.3 Column.addColumn()**

Add a column to self.

##### **Synopsis**

```
void addColumn(Column col, double mult)
```

##### **Arguments**

col: column object to be added.

mult: multiply constant.

##### **18.2.11.4 Column.addTerm()**

Add a term to column object.

##### **Synopsis**

```
void addTerm(Constraint constr, double coeff)
```

##### **Arguments**

constr: a constraint for new term.

coeff: coefficient for new term.

#### 18.2.11.5 Column.addTerms()

Add terms to column object.

##### Synopsis

```
void addTerms(ConstrArray constrs, double coeff)
```

##### Arguments

**constrs:** constraints for added terms.

**coeff:** coefficient for added terms.

#### 18.2.11.6 Column.addTerms()

Add terms to column object.

##### Synopsis

```
void addTerms(ConstrArray constrs, double[] coeffs)
```

##### Arguments

**constrs:** constraints for added terms.

**coeffs:** coefficients for added terms.

#### 18.2.11.7 Column.addTerms()

Add terms to column object.

##### Synopsis

```
void addTerms(Constraint[] constrs, double coeff)
```

##### Arguments

**constrs:** constraints for added terms.

**coeff:** coefficient for added terms.

#### 18.2.11.8 Column.addTerms()

Add terms to column object.

##### Synopsis

```
void addTerms(Constraint[] constrs, double[] coeffs)
```

##### Arguments

**constrs:** constraints for added terms.

**coeffs:** coefficients for added terms.

**18.2.11.9 Column.clear()**

Clear all terms.

**Synopsis**

```
void clear()
```

**18.2.11.10 Column.clone()**

Deep copy column object.

**Synopsis**

```
Column clone()
```

**Return**

cloned column object.

**18.2.11.11 Column.getCoeff()**

Get coefficient from the i-th term in column object.

**Synopsis**

```
double getCoeff(int i)
```

**Arguments**

i: index of the term.

**Return**

coefficient of the i-th term in column object.

**18.2.11.12 Column.getConstr()**

Get constraint from the i-th term in column object.

**Synopsis**

```
Constraint getConstr(int i)
```

**Arguments**

i: index of the term.

**Return**

constraint of the i-th term in column object.

**18.2.11.13 Column.remove()**

Remove i-th term from column object.

**Synopsis**

```
void remove(int idx)
```

**Arguments**

idx: index of the term to be removed.

#### 18.2.11.14 Column.remove()

Remove the term associated with constraint from column object.

##### Synopsis

```
void remove(Constraint constr)
```

##### Arguments

`constr`: a constraint whose term should be removed.

#### 18.2.11.15 Column.size()

Get number of terms in column object.

##### Synopsis

```
int size()
```

##### Return

number of terms.

### 18.2.12 ColumnArray

COPT column array object. To store and access a set of Java *Column* objects, Cardinal Optimizer provides Java ColumnArray class, which defines the following methods.

#### 18.2.12.1 ColumnArray.ColumnArray()

Constructor of columnarray object.

##### Synopsis

```
ColumnArray()
```

#### 18.2.12.2 ColumnArray.clear()

Clear all column objects.

##### Synopsis

```
void clear()
```

#### 18.2.12.3 ColumnArray.getColumn()

Get idx-th column object.

##### Synopsis

```
Column getColumn(int idx)
```

##### Arguments

`idx`: index of the column.

##### Return

column object with index `idx`.



#### **18.2.12.4 ColumnArray.pushBack()**

Add a column object to column array.

##### **Synopsis**

```
void pushBack(Column col)
```

##### **Arguments**

col: a column object.

#### **18.2.12.5 ColumnArray.size()**

Get the number of column objects.

##### **Synopsis**

```
int size()
```

##### **Return**

number of column objects.

### **18.2.13 Sos**

COPT SOS constraint object. SOS constraints are always associated with a particular model. User creates an SOS constraint object by adding an SOS constraint to a model, rather than by using constructor of Sos class.

An SOS constraint can be type 1 or 2 (COPT\_SOS\_TYPE1 or COPT\_SOS\_TYPE2).

#### **18.2.13.1 Sos.getIdx()**

Get the index of SOS constraint.

##### **Synopsis**

```
int getIdx()
```

##### **Return**

index of SOS constraint.

#### **18.2.13.2 Sos.getIIS()**

Get IIS status of the SOS constraint.

##### **Synopsis**

```
int getIIS()
```

##### **Return**

IIS status.

### 18.2.13.3 `Sos.remove()`

Remove the SOS constraint from model.

#### Synopsis

```
void remove()
```

### 18.2.14 `SosArray`

COPT SOS constraint array object. To store and access a set of Java *Sos* objects, Cardinal Optimizer provides Java `SosArray` class, which defines the following methods.

#### 18.2.14.1 `SosArray.SosArray()`

Constructor of `sosarray` object.

#### Synopsis

```
SosArray()
```

#### 18.2.14.2 `SosArray.pushBack()`

Add a SOS constraint object to SOS constraint array.

#### Synopsis

```
void pushBack(Sos sos)
```

#### Arguments

`sos`: a SOS constraint object.

#### 18.2.14.3 `SosArray.size()`

Get the number of SOS constraint objects.

#### Synopsis

```
int size()
```

#### Return

number of SOS constraint objects.

### 18.2.15 `SosBuilder`

COPT SOS constraint builder object. To help building an SOS constraint, given the SOS type, a set of variables and associated weights, Cardinal Optimizer provides Java `SosBuilder` class, which defines the following methods.

**18.2.15.1 SosBuilder.SosBuilder()**

Constructor of sosbuilder object.

**Synopsis**

```
SosBuilder()
```

**18.2.15.2 SosBuilder.getSize()**

Get number of terms in SOS constraint.

**Synopsis**

```
int getSize()
```

**Return**

number of terms.

**18.2.15.3 SosBuilder.getType()**

Get type of SOS constraint.

**Synopsis**

```
int getType()
```

**Return**

type of SOS constraint.

**18.2.15.4 SosBuilder.getVar()**

Get variable from the idx-th term in SOS constraint.

**Synopsis**

```
Var getVar(int idx)
```

**Arguments**

idx: index of the term.

**Return**

variable of the idx-th term in SOS constraint.

**18.2.15.5 SosBuilder.getWeight()**

Get weight from the idx-th term in SOS constraint.

**Synopsis**

```
double getWeight(int idx)
```

**Arguments**

idx: index of the term.

**Return**

weight of the idx-th term in SOS constraint.

#### 18.2.15.6 **SosBuilder.getWeights()**

Get weights of all terms in SOS constraint.

##### **Synopsis**

```
double[] getWeights()
```

##### **Return**

array of weights.

#### 18.2.15.7 **SosBuilder.set()**

Set variables and weights of SOS constraint.

##### **Synopsis**

```
void set(  
    VarArray vars,  
    double[] weights,  
    int type)
```

##### **Arguments**

**vars:** variable array object.

**weights:** array of weights.

**type:** type of SOS constraint.

#### 18.2.16 **SosBuilderArray**

COPT SOS constraint builder array object. To store and access a set of Java *SosBuilder* objects, Cardinal Optimizer provides Java *SosBuilderArray* class, which defines the following methods.

##### 18.2.16.1 **SosBuilderArray.SosBuilderArray()**

Constructor of sosbuilderarray object.

##### **Synopsis**

```
SosBuilderArray()
```

##### 18.2.16.2 **SosBuilderArray.getBuilder()**

Get idx-th SOS constraint builder object.

##### **Synopsis**

```
SosBuilder getBuilder(int idx)
```

##### **Arguments**

**idx:** index of the SOS constraint builder.

##### **Return**

SOS constraint builder object with index idx.

#### **18.2.16.3 SosBuilderArray.pushBack()**

Add a SOS constraint builder object to SOS constraint builder

##### **Synopsis**

```
void pushBack(SosBuilder builder)
```

##### **Arguments**

**builder:** a SOS constraint builder object.

#### **18.2.16.4 SosBuilderArray.size()**

Get the number of SOS constraint builder objects.

##### **Synopsis**

```
int size()
```

##### **Return**

number of SOS constraint builder objects.

### **18.2.17 GenConstr**

COPT general constraint object. General constraints are always associated with a particular model. User creates a general constraint object by adding a general constraint to a model, rather than by using constructor of GenConstr class.

#### **18.2.17.1 GenConstr.getIdx()**

Get the index of the general constraint.

##### **Synopsis**

```
int getIdx()
```

##### **Return**

index of the general constraint.

#### **18.2.17.2 GenConstr.getIIS()**

Get IIS status of the general constraint.

##### **Synopsis**

```
int getIIS()
```

##### **Return**

IIS status.

### 18.2.17.3 `GenConstr.remove()`

Remove the general constraint from model.

#### Synopsis

```
void remove()
```

### 18.2.18 `GenConstrArray`

COPT general constraint array object. To store and access a set of Java *GenConstr* objects, Cardinal Optimizer provides Java `GenConstrArray` class, which defines the following methods.

#### 18.2.18.1 `GenConstrArray.GenConstrArray()`

Constructor of `genconstrarray`.

#### Synopsis

```
GenConstrArray()
```

#### 18.2.18.2 `GenConstrArray.getGenConstr()`

Get `idx`-th general constraint object.

#### Synopsis

```
GenConstr getGenConstr(int idx)
```

#### Arguments

`idx`: index of the general constraint.

#### Return

general constraint object with index `idx`.

#### 18.2.18.3 `GenConstrArray.pushBack()`

Add a general constraint object to general constraint array.

#### Synopsis

```
void pushBack(GenConstr genconstr)
```

#### Arguments

`genconstr`: a general constraint object.

#### 18.2.18.4 `GenConstrArray.size()`

Get the number of general constraint objects.

#### Synopsis

```
int size()
```

#### Return

number of general constraint objects.

### 18.2.19 GenConstrBuilder

COPT general constraint builder object. To help building a general constraint, given a binary variable and associated value, a linear expression and constraint sense, Cardinal Optimizer provides Java GenConstrBuilder class, which defines the following methods.

#### 18.2.19.1 GenConstrBuilder.GenConstrBuilder()

Constructor of genconstrbuilder.

##### Synopsis

```
GenConstrBuilder()
```

#### 18.2.19.2 GenConstrBuilder.getBinVal()

Get binary value associated with general constraint.

##### Synopsis

```
int getBinVal()
```

##### Return

binary value.

#### 18.2.19.3 GenConstrBuilder.getBinVar()

Get binary variable associated with general constraint.

##### Synopsis

```
Var getBinVar()
```

##### Return

binary variable object.

#### 18.2.19.4 GenConstrBuilder.getExpr()

Get expression associated with general constraint.

##### Synopsis

```
Expr getExpr()
```

##### Return

expression object.

#### 18.2.19.5 GenConstrBuilder.getSense()

Get sense associated with general constraint.

##### Synopsis

```
char getSense()
```

##### Return

constraint sense.

#### 18.2.19.6 **GenConstrBuilder.set()**

Set binary variable, binary value, expression and sense of general

##### Synopsis

```
void set(  
    Var binvar,  
    int binval,  
    Expr expr,  
    char sense)
```

##### Arguments

**binvar**: binary variable.  
**binval**: binary value.  
**expr**: expression object.  
**sense**: general constraint sense.

#### 18.2.20 **GenConstrBuilderArray**

COPT general constraint builder array object. To store and access a set of Java *GenConstrBuilder* objects, Cardinal Optimizer provides Java *GenConstrBuilderArray* class, which defines the following methods.

##### 18.2.20.1 **GenConstrBuilderArray.GenConstrBuilderArray()**

Constructor of *genconstrbuilderarray*.

##### Synopsis

```
GenConstrBuilderArray()
```

##### 18.2.20.2 **GenConstrBuilderArray.getBuilder()**

Get *idx*-th general constraint builder object.

##### Synopsis

```
GenConstrBuilder getBuilder(int idx)
```

##### Arguments

**idx**: index of the general constraint builder.

##### Return

general constraint builder object with index *idx*.



### **18.2.20.3 GenConstrBuilderArray.pushBack()**

Add a general constraint builder object to general constraint

#### **Synopsis**

```
void pushBack(GenConstrBuilder builder)
```

#### **Arguments**

**builder:** a general constraint builder object.

### **18.2.20.4 GenConstrBuilderArray.size()**

Get the number of general constraint builder objects.

#### **Synopsis**

```
int size()
```

#### **Return**

number of general constraint builder objects.

## **18.2.21 Cone**

COPT cone constraint object. Cone constraints are always associated with a particular model. User creates a cone constraint object by adding a cone constraint to a model, rather than by using constructor of Cone class.

A cone constraint can be regular or rotated (COPT\_CONE\_QUAD or COPT\_CONE\_RQUAD).

### **18.2.21.1 Cone.getIdx()**

Get the index of a cone constraint.

#### **Synopsis**

```
int getIdx()
```

#### **Return**

index of a cone constraint.

### **18.2.21.2 Cone.remove()**

Remove the cone constraint from model.

#### **Synopsis**

```
void remove()
```

## 18.2.22 ConeArray

COPT cone constraint array object. To store and access a set of Java *Cone* objects, Cardinal Optimizer provides Java ConeArray class, which defines the following methods.

### 18.2.22.1 ConeArray.ConeArray()

Constructor of conearray object.

#### Synopsis

```
ConeArray()
```

### 18.2.22.2 ConeArray.pushBack()

Add a cone constraint object to cone constraint array.

#### Synopsis

```
void pushBack(Cone cone)
```

#### Arguments

cone: a cone constraint object.

### 18.2.22.3 ConeArray.size()

Get the number of cone constraint objects.

#### Synopsis

```
int size()
```

#### Return

number of cone constraint objects.

## 18.2.23 ConeBuilder

COPT cone constraint builder object. To help building a cone constraint, given the cone type and a set of variables, Cardinal Optimizer provides Java ConeBuilder class, which defines the following methods.

### 18.2.23.1 ConeBuilder.ConeBuilder()

Constructor of conebuilder object.

#### Synopsis

```
ConeBuilder()
```

#### **18.2.23.2 ConeBuilder.getSize()**

Get number of variables in a cone constraint.

##### **Synopsis**

```
int getSize()
```

##### **Return**

number of vars.

#### **18.2.23.3 ConeBuilder.getType()**

Get type of a cone constraint.

##### **Synopsis**

```
int getType()
```

##### **Return**

type of a cone constraint.

#### **18.2.23.4 ConeBuilder.getVar()**

Get idx-th variable in a cone constraint.

##### **Synopsis**

```
Var getVar(int idx)
```

##### **Arguments**

idx: index of variables.

##### **Return**

the idx-th variable in a cone constraint.

#### **18.2.23.5 ConeBuilder.set()**

Set variables and type of a cone constraint.

##### **Synopsis**

```
void set(VarArray vars, int type)
```

##### **Arguments**

vars: variable array object.

type: type of a cone constraint.

### **18.2.24 ConeBuilderArray**

COPT cone constraint builder array object. To store and access a set of Java *ConeBuilder* objects, Cardinal Optimizer provides Java *ConeBuilderArray* class, which defines the following methods.

#### 18.2.24.1 ConeBuilderArray.ConeBuilderArray()

Constructor of conebuilderarray object.

##### Synopsis

```
ConeBuilderArray()
```

#### 18.2.24.2 ConeBuilderArray.getBuilder()

Get idx-th cone constraint builder object.

##### Synopsis

```
ConeBuilder getBuilder(int idx)
```

##### Arguments

idx: index of the cone constraint builder.

##### Return

cone constraint builder object with index idx.

#### 18.2.24.3 ConeBuilderArray.pushBack()

Add a cone constraint builder object to cone constraint builder

##### Synopsis

```
void pushBack(ConeBuilder builder)
```

##### Arguments

builder: a cone constraint builder object.

#### 18.2.24.4 ConeBuilderArray.size()

Get the number of cone constraint builder objects.

##### Synopsis

```
int size()
```

##### Return

number of cone constraint builder objects.

### 18.2.25 QuadExpr

COPT quadratic expression object. A quadratic expression consists of a linear expression, a list of variable pairs and associated coefficients of quadratic terms. Quadratic expressions are used to build quadratic constraints and objectives.

**18.2.25.1 QuadExpr.QuadExpr()**

Constructor of a constant quadratic expression with constant 0.0

**Synopsis**

```
QuadExpr()
```

**18.2.25.2 QuadExpr.QuadExpr()**

Constructor of a constant quadratic expression.

**Synopsis**

```
QuadExpr(double constant)
```

**Arguments**

**constant:** constant value in expression object.

**18.2.25.3 QuadExpr.QuadExpr()**

Constructor of a quadratic expression with one term.

**Synopsis**

```
QuadExpr(Var var)
```

**Arguments**

**var:** variable for the added term.

**18.2.25.4 QuadExpr.QuadExpr()**

Constructor of a quadratic expression with one term.

**Synopsis**

```
QuadExpr(Var var, double coeff)
```

**Arguments**

**var:** variable for the added term.

**coeff:** coefficient for the added term.

**18.2.25.5 QuadExpr.QuadExpr()**

Constructor of a quadratic expression with a linear expression.

**Synopsis**

```
QuadExpr(Expr expr)
```

**Arguments**

**expr:** linear expression added to the quadratic expression.

#### 18.2.25.6 QuadExpr.QuadExpr()

Constructor of a quadratic expression with two linear expression.

##### Synopsis

```
QuadExpr(Expr expr, Var var)
```

##### Arguments

**expr**: one linear expression.

**var**: another variable.

#### 18.2.25.7 QuadExpr.QuadExpr()

Constructor of a quadratic expression with two linear expression.

##### Synopsis

```
QuadExpr(Expr left, Expr right)
```

##### Arguments

**left**: one linear expression.

**right**: another linear expression.

#### 18.2.25.8 QuadExpr.addConstant()

Add a constant to the quadratic expression.

##### Synopsis

```
void addConstant(double constant)
```

##### Arguments

**constant**: value to be added.

#### 18.2.25.9 QuadExpr.addLinExpr()

Add a linear expression to self.

##### Synopsis

```
void addLinExpr(Expr expr)
```

##### Arguments

**expr**: linear expression to be added.

#### 18.2.25.10 QuadExpr.addLinExpr()

Add a linear expression to self.

##### Synopsis

```
void addLinExpr(Expr expr, double mult)
```

##### Arguments

**expr**: linear expression to be added.

**mult**: multiplier constant.

**18.2.25.11 QuadExpr.addQuadExpr()**

Add a quadratic expression to self.

**Synopsis**

```
void addQuadExpr(QuadExpr expr)
```

**Arguments**

**expr:** quadratic expression to be added.

**18.2.25.12 QuadExpr.addQuadExpr()**

Add a quadratic expression to self.

**Synopsis**

```
void addQuadExpr(QuadExpr expr, double mult)
```

**Arguments**

**expr:** quadratic expression to be added.

**mult:** multiplier constant.

**18.2.25.13 QuadExpr.addTerm()**

Add a term to quadratic expression object.

**Synopsis**

```
void addTerm(Var var, double coeff)
```

**Arguments**

**var:** a variable of new term.

**coeff:** coefficient of new term.

**18.2.25.14 QuadExpr.addTerm()**

Add a quadratic term to expression object.

**Synopsis**

```
void addTerm(  
    Var var1,  
    Var var2,  
    double coeff)
```

**Arguments**

**var1:** first variable of new quadratic term.

**var2:** second variable of new quadratic term.

**coeff:** coefficient of new quadratic term.

**18.2.25.15 QuadExpr.addTerms()**

Add linear terms to quadratic expression object.

**Synopsis**

```
void addTerms(Var[] vars, double coeff)
```

**Arguments**

**vars:** variables of added linear terms.

**coeff:** one coefficient for added linear terms.

**18.2.25.16 QuadExpr.addTerms()**

Add linear terms to quadratic expression object.

**Synopsis**

```
void addTerms(Var[] vars, double[] coeffs)
```

**Arguments**

**vars:** variables of added linear terms.

**coeffs:** coefficients of added linear terms.

**18.2.25.17 QuadExpr.addTerms()**

Add linear terms to quadratic expression object.

**Synopsis**

```
void addTerms(VarArray vars, double coeff)
```

**Arguments**

**vars:** variables of added linear terms.

**coeff:** one coefficient for added linear terms.

**18.2.25.18 QuadExpr.addTerms()**

Add linear terms to quadratic expression object.

**Synopsis**

```
void addTerms(VarArray vars, double[] coeffs)
```

**Arguments**

**vars:** variables of added terms.

**coeffs:** coefficients of added terms.



**18.2.25.19 QuadExpr.addTerms()**

Add quadratic terms to expression object.

**Synopsis**

```
void addTerms(  
    VarArray vars1,  
    VarArray vars2,  
    double[] coeffs)
```

**Arguments**

**vars1**: first set of variables for added quadratic terms.

**vars2**: second set of variables for added quadratic terms.

**coeffs**: coefficient array for added quadratic terms.

**18.2.25.20 QuadExpr.addTerms()**

Add quadratic terms to expression object.

**Synopsis**

```
void addTerms(  
    Var[] vars1,  
    Var[] vars2,  
    double[] coeffs)
```

**Arguments**

**vars1**: first set of variables for added quadratic terms.

**vars2**: second set of variables for added quadratic terms.

**coeffs**: coefficient array for added quadratic terms.

**18.2.25.21 QuadExpr.clone()**

Deep copy quadratic expression object.

**Synopsis**

```
QuadExpr clone()
```

**Return**

cloned quadratic expression object.

**18.2.25.22 QuadExpr.evaluate()**

evaluate quadratic expression after solving

**Synopsis**

```
double evaluate()
```

**Return**

value of quadratic expression

**18.2.25.23 QuadExpr.getCoeff()**

Get coefficient from the i-th term in quadratic expression.

**Synopsis**

```
double getCoeff(int i)
```

**Arguments**

i: index of the term.

**Return**

coefficient of the i-th term in quadratic expression object.

**18.2.25.24 QuadExpr.getConstant()**

Get constant in quadratic expression.

**Synopsis**

```
double getConstant()
```

**Return**

constant in quadratic expression.

**18.2.25.25 QuadExpr.getLinExpr()**

Get linear expression in quadratic expression.

**Synopsis**

```
Expr getLinExpr()
```

**Return**

linear expression object.

**18.2.25.26 QuadExpr.getVar1()**

Get first variable from the i-th term in quadratic expression.

**Synopsis**

```
Var getVar1(int i)
```

**Arguments**

i: index of the term.

**Return**

first variable of the i-th term in quadratic expression object.

**18.2.25.27 QuadExpr.getVar2()**

Get second variable from the i-th term in quadratic expression.

**Synopsis**

```
Var getVar2(int i)
```

**Arguments**

i: index of the term.

**Return**

second variable of the i-th term in quadratic expression object.

**18.2.25.28 QuadExpr.remove()**

Remove idx-th term from quadratic expression object.

**Synopsis**

```
void remove(int idx)
```

**Arguments**

idx: index of the term to be removed.

**18.2.25.29 QuadExpr.remove()**

Remove the term associated with variable from quadratic expression.

**Synopsis**

```
void remove(Var var)
```

**Arguments**

var: a variable whose term should be removed.

**18.2.25.30 QuadExpr.setCoeff()**

Set coefficient of the i-th term in quadratic expression.

**Synopsis**

```
void setCoeff(int i, double val)
```

**Arguments**

i: index of the quadratic term.

val: coefficient of the term.

**18.2.25.31 QuadExpr.setConstant()**

Set constant for the quadratic expression.

**Synopsis**

```
void setConstant(double constant)
```

**Arguments**

constant: the value of the constant.

#### 18.2.25.32 QuadExpr.size()

Get number of terms in quadratic expression.

##### Synopsis

```
long size()
```

##### Return

number of quadratic terms.

#### 18.2.26 QConstraint

COPT quadratic constraint object. Quadratic constraints are always associated with a particular model. User creates a quadratic constraint object by adding a quadratic constraint to a model, rather than by using constructor of QConstraint class.

##### 18.2.26.1 QConstraint.get()

Get attribute value of the quadratic constraint.

##### Synopsis

```
double get(String attr)
```

##### Arguments

**attr:** name of the attribute being queried.

##### Return

attribute value.

##### 18.2.26.2 QConstraint.getIdx()

Get index of the quadratic constraint.

##### Synopsis

```
int getIdx()
```

##### Return

the index of the quadratic constraint.

##### 18.2.26.3 QConstraint.getName()

Get name of the constraint.

##### Synopsis

```
String getName()
```

##### Return

the name of the constraint.

#### 18.2.26.4 QConstraint.getRhs()

Get rhs of quadratic constraint.

##### Synopsis

```
double getRhs()
```

##### Return

rhs of quadratic constraint.

#### 18.2.26.5 QConstraint.getSense()

Get rhs of quadratic constraint.

##### Synopsis

```
char getSense()
```

##### Return

rhs of quadratic constraint.

#### 18.2.26.6 QConstraint.remove()

Remove this constraint from model.

##### Synopsis

```
void remove()
```

#### 18.2.26.7 QConstraint.set()

Set attribute value of the quadratic constraint.

##### Synopsis

```
void set(String attr, double val)
```

##### Arguments

**attr:** name of the attribute.

**val:** new value.

#### 18.2.26.8 QConstraint.setName()

Set name of quadratic constraint.

##### Synopsis

```
void setName(String name)
```

##### Arguments

**name:** the name to set.

#### 18.2.26.9 `QConstraint.setRhs()`

Set rhs of quadratic constraint.

##### Synopsis

```
void setRhs(double rhs)
```

##### Arguments

**rhs:** rhs of quadratic constraint.

#### 18.2.26.10 `QConstraint.setSense()`

Set sense of quadratic constraint.

##### Synopsis

```
void setSense(char sense)
```

##### Arguments

**sense:** sense of quadratic constraint.

### 18.2.27 `QConstrArray`

COPT quadratic constraint array object. To store and access a set of Java *QConstraint* objects, Cardinal Optimizer provides Java `QConstrArray` class, which defines the following methods.

#### 18.2.27.1 `QConstrArray.QConstrArray()`

QConstructor of constrarray object.

##### Synopsis

```
QConstrArray()
```

#### 18.2.27.2 `QConstrArray.getQConstr()`

Get idx-th constraint object.

##### Synopsis

```
QConstraint getQConstr(int idx)
```

##### Arguments

**idx:** index of the constraint.

##### Return

constraint object with index idx.

#### **18.2.27.3 QConstrArray.pushBack()**

Add a constraint object to constraint array.

##### **Synopsis**

```
void pushBack(QConstraint constr)
```

##### **Arguments**

`constr`: a constraint object.

#### **18.2.27.4 QConstrArray.size()**

Get the number of constraint objects.

##### **Synopsis**

```
int size()
```

##### **Return**

number of constraint objects.

### **18.2.28 QConstrBuilder**

COPT quadratic constraint builder object. To help building a quadratic constraint, given a quadratic expression, constraint sense and right-hand side value, Cardinal Optimizer provides Java ConeBuilder class, which defines the following methods.

#### **18.2.28.1 QConstrBuilder.QConstrBuilder()**

QConstructor of constrbuilder object.

##### **Synopsis**

```
QConstrBuilder()
```

#### **18.2.28.2 QConstrBuilder.getQuadExpr()**

Get expression associated with constraint.

##### **Synopsis**

```
QuadExpr getQuadExpr()
```

##### **Return**

expression object.

#### **18.2.28.3 QConstrBuilder.getSense()**

Get sense associated with constraint.

##### **Synopsis**

```
char getSense()
```

##### **Return**

constraint sense.

#### 18.2.28.4 QConstrBuilder.set()

Set detail of a quadratic constraint to its builder object.

##### Synopsis

```
void set(  
    QuadExpr expr,  
    char sense,  
    double rhs)
```

##### Arguments

**expr:** expression object at one side of the quadratic constraint.

**sense:** quadratic constraint sense.

**rhs:** quadratic constant of right side of the constraint.

### 18.2.29 QConstrBuilderArray

COPT quadratic constraint builder array object. To store and access a set of Java *QConstrBuilder* objects, Cardinal Optimizer provides Java *QConstrBuilderArray* class, which defines the following methods.

#### 18.2.29.1 QConstrBuilderArray.QConstrBuilderArray()

QConstructor of constrbuilderarray object.

##### Synopsis

```
QConstrBuilderArray()
```

#### 18.2.29.2 QConstrBuilderArray.getBuilder()

Get idx-th constraint builder object.

##### Synopsis

```
QConstrBuilder getBuilder(int idx)
```

##### Arguments

**idx:** index of the constraint builder.

##### Return

constraint builder object with index idx.

#### 18.2.29.3 QConstrBuilderArray.pushBack()

Add a constraint builder object to constraint builder array.

##### Synopsis

```
void pushBack(QConstrBuilder builder)
```

##### Arguments

**builder:** a constraint builder object.



#### **18.2.29.4 QConstrBuilderArray.size()**

Get the number of constraint builder objects.

##### **Synopsis**

```
int size()
```

##### **Return**

number of constraint builder objects.

### **18.2.30 PsdVar**

COPT PSD variable object. PSD variables are always associated with a particular model. User creates a PSD variable object by adding a PSD variable to model, rather than by constructor of PsdVar class.

#### **18.2.30.1 PsdVar.get()**

Get attribute values of PSD variable.

##### **Synopsis**

```
double[] get(String attr)
```

##### **Arguments**

**attr:** attribute name.

##### **Return**

output array of attribute values.

#### **18.2.30.2 PsdVar.getDim()**

Get dimension of PSD variable.

##### **Synopsis**

```
int getDim()
```

##### **Return**

dimension of PSD variable.

#### **18.2.30.3 PsdVar.getIdx()**

Get length of PSD variable.

##### **Synopsis**

```
int getIdx()
```

##### **Return**

length of PSD variable.

#### 18.2.30.4 **PsdVar.getLen()**

Get length of PSD variable.

##### **Synopsis**

```
int getLen()
```

##### **Return**

length of PSD variable.

#### 18.2.30.5 **PsdVar.getName()**

Get name of PSD variable.

##### **Synopsis**

```
String getName()
```

##### **Return**

name of PSD variable.

#### 18.2.30.6 **PsdVar.remove()**

Remove PSD variable from model.

##### **Synopsis**

```
void remove()
```

### 18.2.31 **PsdVarArray**

COPT PSD variable array object. To store and access a set of *PsdVar* objects, Cardinal Optimizer provides *PsdVarArray* class, which defines the following methods.

#### 18.2.31.1 **PsdVarArray.PsdVarArray()**

Constructor of *PsdVarArray*.

##### **Synopsis**

```
PsdVarArray()
```

#### 18.2.31.2 **PsdVarArray.getPsdVar()**

Get idx-th PSD variable object.

##### **Synopsis**

```
PsdVar getPsdVar(int idx)
```

##### **Arguments**

idx: index of the PSD variable.

##### **Return**

PSD variable object with index idx.

#### **18.2.31.3 PsdVarArray.pushBack()**

Add a PSD variable object to PSD variable array.

##### **Synopsis**

```
void pushBack(PsdVar var)
```

##### **Arguments**

**var:** a PSD variable object.

#### **18.2.31.4 PsdVarArray.reserve()**

Reserve capacity to contain at least n items.

##### **Synopsis**

```
void reserve(int n)
```

##### **Arguments**

**n:** minimum capacity for PSD variable object.

#### **18.2.31.5 PsdVarArray.size()**

Get the number of PSD variable objects.

##### **Synopsis**

```
int size()
```

##### **Return**

number of PSD variable objects.

### **18.2.32 PsdExpr**

COPT PSD expression object. A PSD expression consists of a linear expression, a list of PSD variables and associated coefficient matrices of PSD terms. PSD expressions are used to build PSD constraints and objectives.

#### **18.2.32.1 PsdExpr.PsdExpr()**

Constructor of a PSD expression with default constant value 0.

##### **Synopsis**

```
PsdExpr(double constant)
```

##### **Arguments**

**constant:** optional, constant value in PSD expression object.

#### 18.2.32.2 `PsdExpr.PsdExpr()`

Constructor of a PSD expression with one term.

##### Synopsis

```
PsdExpr(Var var)
```

##### Arguments

`var`: variable for the added term.

#### 18.2.32.3 `PsdExpr.PsdExpr()`

Constructor of a PSD expression with one term.

##### Synopsis

```
PsdExpr(Var var, double coeff)
```

##### Arguments

`var`: variable for the added term.

`coeff`: coefficient for the added term.

#### 18.2.32.4 `PsdExpr.PsdExpr()`

Constructor of a PSD expression with a linear expression.

##### Synopsis

```
PsdExpr(Expr expr)
```

##### Arguments

`expr`: input linear expression.

#### 18.2.32.5 `PsdExpr.PsdExpr()`

Constructor of a PSD expression with one term.

##### Synopsis

```
PsdExpr(PsdVar var, SymMatrix mat)
```

##### Arguments

`var`: PSD variable for the added term.

`mat`: coefficient matrix for the added term.

#### 18.2.32.6 `PsdExpr.PsdExpr()`

Constructor of a PSD expression with one term.

##### Synopsis

```
PsdExpr(PsdVar var, SymMatExpr expr)
```

##### Arguments

`var`: PSD variable for the added term.

`expr`: coefficient expression of symmetric matrices of new PSD term.

**18.2.32.7 PsdExpr.addConstant()**

Add constant to the PSD expression.

**Synopsis**

```
void addConstant(double constant)
```

**Arguments**

constant: value to be added.

**18.2.32.8 PsdExpr.addLinExpr()**

Add a linear expression to PSD expression object.

**Synopsis**

```
void addLinExpr(Expr expr)
```

**Arguments**

expr: linear expression to be added.

**18.2.32.9 PsdExpr.addLinExpr()**

Add a linear expression to PSD expression object.

**Synopsis**

```
void addLinExpr(Expr expr, double mult)
```

**Arguments**

expr: linear expression to be added.

mult: multiplier constant.

**18.2.32.10 PsdExpr.addPsdExpr()**

Add a PSD expression to self.

**Synopsis**

```
void addPsdExpr(PsdExpr expr)
```

**Arguments**

expr: PSD expression to be added.

**18.2.32.11 PsdExpr.addPsdExpr()**

Add a PSD expression to self.

**Synopsis**

```
void addPsdExpr(PsdExpr expr, double mult)
```

**Arguments**

expr: PSD expression to be added.

mult: multiplier constant.

**18.2.32.12 PsdExpr.addTerm()**

Add a linear term to PSD expression object.

**Synopsis**

```
void addTerm(Var var, double coeff)
```

**Arguments**

**var**: variable of new linear term.

**coeff**: coefficient of new linear term.

**18.2.32.13 PsdExpr.addTerm()**

Add a PSD term to PSD expression object.

**Synopsis**

```
void addTerm(PsdVar var, SymMatrix mat)
```

**Arguments**

**var**: PSD variable of new PSD term.

**mat**: coefficient matrix of new PSD term.

**18.2.32.14 PsdExpr.addTerm()**

Add a PSD term to PSD expression object.

**Synopsis**

```
void addTerm(PsdVar var, SymMatExpr expr)
```

**Arguments**

**var**: PSD variable of new PSD term.

**expr**: coefficient expression of symmetric matrices of new PSD term.

**18.2.32.15 PsdExpr.addTerms()**

Add linear terms to PSD expression object.

**Synopsis**

```
void addTerms(Var[] vars, double coeff)
```

**Arguments**

**vars**: variables of added linear terms.

**coeff**: one coefficient for added linear terms.

**18.2.32.16 PsdExpr.addTerms()**

Add linear terms to PSD expression object.

**Synopsis**

```
void addTerms(Var[] vars, double[] coeffs)
```

**Arguments**

**vars:** variables for added linear terms.

**coeffs:** coefficient array for added linear terms.

**18.2.32.17 PsdExpr.addTerms()**

Add linear terms to PSD expression object.

**Synopsis**

```
void addTerms(VarArray vars, double coeff)
```

**Arguments**

**vars:** variables of added linear terms.

**coeff:** one coefficient for added linear terms.

**18.2.32.18 PsdExpr.addTerms()**

Add linear terms to PSD expression object.

**Synopsis**

```
void addTerms(VarArray vars, double[] coeffs)
```

**Arguments**

**vars:** variables of added terms.

**coeffs:** coefficients of added terms.

**18.2.32.19 PsdExpr.addTerms()**

Add PSD terms to PSD expression object.

**Synopsis**

```
void addTerms(PsdVarArray vars, SymMatrixArray mats)
```

**Arguments**

**vars:** PSD variables for added PSD terms.

**mats:** coefficient matrixes for added PSD terms.

**18.2.32.20 PsdExpr.addTerms()**

Add PSD terms to PSD expression object.

**Synopsis**

```
void addTerms(PsdVar[] vars, SymMatrix[] mats)
```

**Arguments**

**vars:** PSD variables for added PSD terms.

**mats:** coefficient matrixes for added PSD terms.

**18.2.32.21 PsdExpr.clone()**

Deep copy PSD expression object.

**Synopsis**

```
PsdExpr clone()
```

**Return**

cloned PSD expression object.

**18.2.32.22 PsdExpr.evaluate()**

Evaluate PSD expression after solving

**Synopsis**

```
double evaluate()
```

**Return**

Value of PSD expression

**18.2.32.23 PsdExpr.getCoeff()**

Get coefficient from the i-th term in PSD expression.

**Synopsis**

```
SymMatExpr getCoeff(int i)
```

**Arguments**

**i:** index of the PSD term.

**Return**

coefficient expression of the i-th PSD term.

**18.2.32.24 PsdExpr.getConstant()**

Get constant in PSD expression.

**Synopsis**

```
double getConstant()
```

**Return**

constant in PSD expression.



**18.2.32.25 PsdExpr.getLinExpr()**

Get linear expression in PSD expression.

**Synopsis**

```
Expr getLinExpr()
```

**Return**

linear expression object.

**18.2.32.26 PsdExpr.getPsdVar()**

Get the PSD variable from the i-th term in PSD expression.

**Synopsis**

```
PsdVar getPsdVar(int i)
```

**Arguments**

i: index of the term.

**Return**

the first variable of the i-th term in PSD expression object.

**18.2.32.27 PsdExpr.multiply()**

Multiply a PSD expression and a constant.

**Synopsis**

```
void multiply(double c)
```

**Arguments**

c: constant operand.

**18.2.32.28 PsdExpr.remove()**

Remove i-th term from PSD expression object.

**Synopsis**

```
void remove(int idx)
```

**Arguments**

idx: index of the term to be removed.

**18.2.32.29 PsdExpr.remove()**

Remove the term associated with variable from PSD expression.

**Synopsis**

```
void remove(Var var)
```

**Arguments**

var: a variable whose term should be removed.

#### 18.2.32.30 `PsdExpr.remove()`

Remove the term associated with PSD variable from PSD expression.

##### Synopsis

```
void remove(PsdVar var)
```

##### Arguments

`var`: a PSD variable whose term should be removed.

#### 18.2.32.31 `PsdExpr.setCoeff()`

Set coefficient matrix of the i-th term in PSD expression.

##### Synopsis

```
void setCoeff(int i, SymMatrix mat)
```

##### Arguments

`i`: index of the PSD term.

`mat`: coefficient matrix of the term.

#### 18.2.32.32 `PsdExpr.setConstant()`

Set constant for the PSD expression.

##### Synopsis

```
void setConstant(double constant)
```

##### Arguments

`constant`: the value of the constant.

#### 18.2.32.33 `PsdExpr.size()`

Get number of PSD terms in expression.

##### Synopsis

```
long size()
```

##### Return

number of PSD terms.

### 18.2.33 `PsdConstraint`

COPT PSD constraint object. PSD constraints are always associated with a particular model. User creates a PSD constraint object by adding a PSD constraint to model, rather than by constructor of `PsdConstraint` class.

**18.2.33.1 PsdConstraint.get()**

Get attribute value of the PSD constraint. Support related PSD attributes.

**Synopsis**

```
double get(String attr)
```

**Arguments**

**attr:** name of queried attribute.

**Return**

attribute value.

**18.2.33.2 PsdConstraint.getIdx()**

Get index of the PSD constraint.

**Synopsis**

```
int getIdx()
```

**Return**

the index of the PSD constraint.

**18.2.33.3 PsdConstraint.getName()**

Get name of the PSD constraint.

**Synopsis**

```
String getName()
```

**Return**

the name of the PSD constraint.

**18.2.33.4 PsdConstraint.remove()**

Remove this PSD constraint from model.

**Synopsis**

```
void remove()
```

**18.2.33.5 PsdConstraint.set()**

Set attribute value of the PSD constraint. Support related PSD attributes.

**Synopsis**

```
void set(String attr, double value)
```

**Arguments**

**attr:** name of queried attribute.

**value:** new value.

#### 18.2.33.6 `PsdConstraint.setName()`

Set name of a PSD constraint.

##### Synopsis

```
void setName(String name)
```

##### Arguments

**name:** the name to set.

#### 18.2.34 `PsdConstrArray`

COPT PSD constraint array object. To store and access a set of *PsdConstraint* objects, Cardinal Optimizer provides `PsdConstrArray` class, which defines the following methods.

##### 18.2.34.1 `PsdConstrArray.PsdConstrArray()`

Constructor of `PsdConstrArray` object.

##### Synopsis

```
PsdConstrArray()
```

##### 18.2.34.2 `PsdConstrArray.getPsdConstr()`

Get idx-th PSD constraint object.

##### Synopsis

```
PsdConstraint getPsdConstr(int idx)
```

##### Arguments

**idx:** index of the PSD constraint.

##### Return

PSD constraint object with index **idx**.

##### 18.2.34.3 `PsdConstrArray.pushBack()`

Add a PSD constraint object to PSD constraint array.

##### Synopsis

```
void pushBack(PsdConstraint constr)
```

##### Arguments

**constr:** a PSD constraint object.

#### **18.2.34.4 PsdConstrArray.reserve()**

Reserve capacity to contain at least n items.

##### **Synopsis**

```
void reserve(int n)
```

##### **Arguments**

n: minimum capacity for PSD constraint objects.

#### **18.2.34.5 PsdConstrArray.size()**

Get the number of PSD constraint objects.

##### **Synopsis**

```
int size()
```

##### **Return**

number of PSD constraint objects.

### **18.2.35 PsdConstrBuilder**

COPT PSD constraint builder object. To help building a PSD constraint, given a PSD expression, constraint sense and right-hand side value, Cardinal Optimizer provides PsdConstrBuilder class, which defines the following methods.

#### **18.2.35.1 PsdConstrBuilder.PsdConstrBuilder()**

Constructor of PsdConstrBuilder object.

##### **Synopsis**

```
PsdConstrBuilder()
```

#### **18.2.35.2 PsdConstrBuilder.getPsdExpr()**

Get expression associated with PSD constraint.

##### **Synopsis**

```
PsdExpr getPsdExpr()
```

##### **Return**

PSD expression object.

#### **18.2.35.3 PsdConstrBuilder.getRange()**

Get range from lower bound to upper bound of range constraint.

##### **Synopsis**

```
double getRange()
```

##### **Return**

length from lower bound to upper bound of the constraint.

#### 18.2.35.4 `PsdConstrBuilder.getSense()`

Get sense associated with PSD constraint.

##### Synopsis

```
char getSense()
```

##### Return

PSD constraint sense.

#### 18.2.35.5 `PsdConstrBuilder.set()`

Set detail of a PSD constraint to its builder object.

##### Synopsis

```
void set(  
    PsdExpr expr,  
    char sense,  
    double rhs)
```

##### Arguments

**expr**: expression object at one side of the PSD constraint.

**sense**: PSD constraint sense, other than COPT\_RANGE.

**rhs**: constant at right side of the PSD constraint.

#### 18.2.35.6 `PsdConstrBuilder.setRange()`

Set a range constraint to its builder.

##### Synopsis

```
void setRange(PsdExpr expr, double range)
```

##### Arguments

**expr**: PSD expression object, whose constant is negative upper bound.

**range**: length from lower bound to upper bound of the constraint.

### 18.2.36 `PsdConstrBuilderArray`

COPT PSD constraint builder array object. To store and access a set of *PsdConstrBuilder* objects, Cardinal Optimizer provides `PsdConstrBuilderArray` class, which defines the following methods.

#### 18.2.36.1 `PsdConstrBuilderArray.PsdConstrBuilderArray()`

Constructor of `PsdConstrBuilderArray` object.

##### Synopsis

```
PsdConstrBuilderArray()
```

#### 18.2.36.2 `PsdConstrBuilderArray.getBuilder()`

Get idx-th PSD constraint builder object.

##### Synopsis

```
PsdConstrBuilder getBuilder(int idx)
```

##### Arguments

idx: index of the PSD constraint builder.

##### Return

PSD constraint builder object with index idx.

#### 18.2.36.3 `PsdConstrBuilderArray.pushBack()`

Add a PSD constraint builder to PSD constraint builder array.

##### Synopsis

```
void pushBack(PsdConstrBuilder builder)
```

##### Arguments

builder: a PSD constraint builder object.

#### 18.2.36.4 `PsdConstrBuilderArray.reserve()`

Reserve capacity to contain at least n items.

##### Synopsis

```
void reserve(int n)
```

##### Arguments

n: minimum capacity for PSD constraint builder object.

#### 18.2.36.5 `PsdConstrBuilderArray.size()`

Get the number of PSD constraint builder objects.

##### Synopsis

```
int size()
```

##### Return

number of PSD constraint builder objects.

### 18.2.37 `SymMatrix`

COPT symmetric matrix object. Symmetric matrices are always associated with a particular model. User creates a symmetric matrix object by adding a symmetric matrix to model, rather than by constructor of `SymMatrix` class.

Symmetric matrices are used as coefficient matrices of PSD terms in PSD expressions, PSD constraints or PSD objectives.

#### 18.2.37.1 **SymMatrix.getDim()**

Get the dimension of a symmetric matrix.

##### **Synopsis**

```
int getDim()
```

##### **Return**

Dimension of a symmetric matrix.

#### 18.2.37.2 **SymMatrix.getIdx()**

Get the index of a symmetric matrix.

##### **Synopsis**

```
int getIdx()
```

##### **Return**

Index of a symmetric matrix.

### 18.2.38 **SymMatrixArray**

COPT symmetric matrix object. To store and access a set of *SymMatrix* objects, Cardinal Optimizer provides SymMatrixArray class, which defines the following methods.

#### 18.2.38.1 **SymMatrixArray.SymMatrixArray()**

Constructor of SymMatrixAarray.

##### **Synopsis**

```
SymMatrixArray()
```

#### 18.2.38.2 **SymMatrixArray.getMatrix()**

Get i-th SymMatrix object.

##### **Synopsis**

```
SymMatrix getMatrix(int idx)
```

##### **Arguments**

idx: index of the SymMatrix object.

##### **Return**

SymMatrix object with index idx.



### **18.2.38.3 SymMatrixArray.pushBack()**

Add a SymMatrix object to SymMatrix array.

#### **Synopsis**

```
void pushBack(SymMatrix mat)
```

#### **Arguments**

**mat:** a SymMatrix object.

### **18.2.38.4 SymMatrixArray.reserve()**

Reserve capacity to contain at least n items.

#### **Synopsis**

```
void reserve(int n)
```

#### **Arguments**

**n:** minimum capacity for symmetric matrix object.

### **18.2.38.5 SymMatrixArray.size()**

Get the number of SymMatrix objects.

#### **Synopsis**

```
int size()
```

#### **Return**

number of SymMatrix objects.

## **18.2.39 SymMatExpr**

COPT symmetric matrix expression object. A symmetric matrix expression is a linear combination of symmetric matrices, which is still a symmetric matrix. However, by doing so, we are able to delay computing the final matrix until setting PSD constraints or PSD objective.

### **18.2.39.1 SymMatExpr.SymMatExpr()**

Constructor of a symmetric matrix expression.

#### **Synopsis**

```
SymMatExpr()
```

### **18.2.39.2 SymMatExpr.SymMatExpr()**

Constructor of a symmetric matrix expression with one term.

#### **Synopsis**

```
SymMatExpr(SymMatrix mat, double coeff)
```

#### **Arguments**

**mat:** symmetric matrix of the added term.

**coeff:** coefficient for the added term.

#### 18.2.39.3 **SymMatExpr.addSymMatExpr()**

Add a symmetric matrix expression to self.

##### **Synopsis**

```
void addSymMatExpr(SymMatExpr expr, double mult)
```

##### **Arguments**

**expr:** symmetric matrix expression to be added.

**mult:** constant multiplier.

#### 18.2.39.4 **SymMatExpr.addTerm()**

Add a term to symmetric matrix expression object.

##### **Synopsis**

```
Boolean addTerm(SymMatrix mat, double coeff)
```

##### **Arguments**

**mat:** symmetric matrix of the new term.

**coeff:** coefficient of the new term.

##### **Return**

True if the term is added successfully.

#### 18.2.39.5 **SymMatExpr.addTerms()**

Add multiple terms to expression object.

##### **Synopsis**

```
int addTerms(SymMatrixArray mats, double[] coeffs)
```

##### **Arguments**

**mats:** symmetric matrix array object for added terms.

**coeffs:** coefficient array for added terms.

##### **Return**

Number of added terms. If negative, fail to add one of terms.

#### 18.2.39.6 **SymMatExpr.addTerms()**

Add multiple terms to expression object.

##### **Synopsis**

```
int addTerms(SymMatrix[] mats, double[] coeffs)
```

##### **Arguments**

**mats:** symmetric matrix array object for added terms.

**coeffs:** coefficient array for added terms.

##### **Return**

Number of added terms. If negative, fail to add one of terms.

**18.2.39.7 SymMatExpr.addTerms()**

Add multiple terms to expression object.

**Synopsis**

```
int addTerms(SymMatrix[] mats, double coeff)
```

**Arguments**

**mats:** symmetric matrix array object for added terms.

**coeff:** common coefficient for added terms.

**Return**

Number of added terms. If negative, fail to add one of terms.

**18.2.39.8 SymMatExpr.clone()**

Deep copy symmetric matrix expression object.

**Synopsis**

```
SymMatExpr clone()
```

**Return**

cloned expression object.

**18.2.39.9 SymMatExpr.getCoeff()**

Get coefficient of the i-th term in expression object.

**Synopsis**

```
double getCoeff(int i)
```

**Arguments**

**i:** index of the term.

**Return**

coefficient of the i-th term.

**18.2.39.10 SymMatExpr.getDim()**

Get dimension of symmetric matrix in expression.

**Synopsis**

```
int getDim()
```

**Return**

dimension of symmetric matrix.

**18.2.39.11 SymMatExpr.getSymMat()**

Get symmetric matrix of the i-th term in expression object.

**Synopsis**

```
SymMatrix getSymMat(int i)
```

**Arguments**

i: index of the term.

**Return**

the symmetric matrix of the i-th term.

**18.2.39.12 SymMatExpr.multiply()**

multiply a symmetric matrix expression and a constant.

**Synopsis**

```
void multiply(double c)
```

**Arguments**

c: constant operand.

**18.2.39.13 SymMatExpr.remove()**

Remove i-th term from expression object.

**Synopsis**

```
void remove(int idx)
```

**Arguments**

idx: index of the term to be removed.

**18.2.39.14 SymMatExpr.remove()**

Remove the term associated with the symmetric matrix.

**Synopsis**

```
void remove(SymMatrix mat)
```

**Arguments**

mat: a symmetric matrix whose term should be removed.

**18.2.39.15 SymMatExpr.reserve()**

Reserve capacity to contain at least n items.

**Synopsis**

```
void reserve(int n)
```

**Arguments**

n: minimum capacity for expression object.

**18.2.39.16 SymMatExpr.setCoeff()**

Set coefficient for the i-th term in expression object.

**Synopsis**

```
void setCoeff(int i, double val)
```

**Arguments**

i: index of the term.

val: coefficient of the term.

**18.2.39.17 SymMatExpr.size()**

Get number of terms in expression.

**Synopsis**

```
long size()
```

**Return**

number of terms.

**18.2.40 ProbBuffer**

Buffer object for COPT problem. ProbBuffer object holds the (MPS) problem in string format.

**18.2.40.1 ProbBuffer.ProbBuffer()**

Constructor of ProbBuffer object.

**Synopsis**

```
ProbBuffer(int sz)
```

**Arguments**

sz: initial size of the problem buffer.

**18.2.40.2 ProbBuffer.getData()**

Get string of problem in problem buffer.

**Synopsis**

```
String getData()
```

**Return**

string of problem in problem buffer.

#### 18.2.40.3 ProbBuffer.resize()

Resize buffer to given size, and zero-ended.

##### Synopsis

```
void resize(int sz)
```

##### Arguments

**sz**: new buffer size.

#### 18.2.40.4 ProbBuffer.size()

Get the size of problem buffer.

##### Synopsis

```
int size()
```

##### Return

size of problem buffer.

### 18.2.41 CoptException

Copt exception object.

#### 18.2.41.1 CoptException.CoptException()

Constructor of coptexception.

##### Synopsis

```
CoptException(int code, String msg)
```

##### Arguments

**code**: error code for exception.

**msg**: error message for exception.

#### 18.2.41.2 CoptException.getCode()

Get the error code associated with the exception.

##### Synopsis

```
int getCode()
```

##### Return

the error code.



## Chapter 19

# Python API Reference

The **Cardinal Optimizer** provides a Python API library. This chapter documents all COPT Python constants and API functions for python applications.

### 19.1 Constants

Python Constants are necessary to solve a problem using the Python interface. There are four types of constants defined in COPT Python API library. They are general constants, information constants, parameters and attributes.

#### 19.1.1 General Constants

For the contents of Python general constants, see [General Constants](#).

General constants are those commonly used in modeling, such as optimization directions, variable types, and solving status, etc. Users may refer to general constants with a 'COPT' prefix. For instance, COPT.VERSION\_MAJOR is the major version number of the **Cardinal Optimizer**.

#### 19.1.2 Attributes

For the contents of Python attribute constants, see [Attributes](#).

In the Python API, users may refer to attributes using a 'COPT.Attr' prefix. For instance, COPT.Attr.Cols is the number of variables or columns in the model.

In the Python API, user can get the attribute value by specifying the attribute name. Attributes are mostly used in `Model.getAttr()` method to query properties of the model, please refer to [Python API: Model Class](#) for details. Here is an example:

- `Model.getAttr()`: `Model.getAttr("Cols")` obtain the number of variables or columns in the model.



### 19.1.3 Information

For the contents of Python API information class constants, see [Information](#).

In the Python API, user can access information through the `COPT.Info` prefix. For instance, `COPT.Info.Obj` is the objective function coefficients for variables (columns).

In the Python API, user can get or set the information value of the object by specifying the information name:

- Get the value of variable or constraint information: `Model.getInfo()` / `Var.getInfo()` / `Constraint.getInfo()`
- Set the value of variable or constraint information: `Model.setInfo()` / `Var.setInfo()` / `Constraint.setInfo()`

### 19.1.4 Parameters

For the contents of Python API Parameters class constants, see [Parameters](#).

Parameters control the operation of the **Cardinal Optimizer**. They can be modified before the optimization begins.

In the Python API, user can access parameters through the `COPT.Param` prefix. For instance, `COPT.Param.TimeLimit` is time limit in seconds of the optimization.

In the Python API, user can get and set the parameter value by specifying the parameter name. The provided functions are as follows, please refer to [Python API: Model Class](#) for details.

- Get detailed information of the specified parameter (current value/max/min): `Model.getParamInfo()`
- Get the current value of the specified parameter: `Model.getParam()`
- Set the specified parameter value: `Model.setParam()`

## 19.2 Python Modeling Classes

Python modeling classes are essential for the Python interface of Cardinal Optimizer. It provides plentiful easy-to-use methods to quickly build optimization models in complex practical scenarios. This section will explain these functions and their usage.

### 19.2.1 EnvrConfig Class

`EnvrConfig` object contains operations related to client configuration, and provides the following methods:

#### 19.2.1.1 EnvConfig()

##### Synopsis

```
EnvrConfig()
```

##### Description

Constructor of `EnvrConfig` class. This method creates and returns an [EnvrConfig Class](#) object.

##### Example

```
# Create client configuration
envconfig = EnvrConfig()
```

### 19.2.1.2 EnvrConfig.set()

#### Synopsis

```
set(name, value)
```

#### Description

Set client configuration.

#### Arguments

name

Name of configuration parameter.

value

Value of configuration parameter.

#### Example

```
# Set client configuration
envconfig.set(COPT.CLIENT_WAITTIME, 600)
```

## 19.2.2 Envr Class

Envr object contains operations related to COPT optimization environment, and provides the following methods:

### 19.2.2.1 Envr()

#### Synopsis

```
Envr(arg=None)
```

#### Description

Function for constructing Envr object. This method creates and returns an *Envr Class* object.

#### Arguments

arg

Path of license file or client configuration. Optional argument, defaults to None.

#### Example

```
# Create solving environment
env = Envr()
```

### 19.2.2.2 Envr.createModel()

#### Synopsis

```
createModel(name="")
```

#### Description

Create optimization model and return a *Model Class* object.

#### Arguments

name

The name of the Model object to be created. Optional, "" by default.

#### Example

```
# Create optimization model
model = env.createModel("coptprob")
```

### 19.2.2.3 Env.close()

#### Synopsis

```
close()
```

#### Description

Close connection to remote server.

#### Example

```
# Close connection to remote server
env.close()
```

## 19.2.3 Model Class

For easy access to model's attributes and optimization parameters, Model object provides methods such as `Model.Rows`. The full list of attributes can be found in [Attributes](#) section. For convenience, attributes can be accessed by their names in capital or lower case.

Note that for LP or MIP, both the objective value and the solution status can be accessed through `Model.objval` and `Model.status`.

For optimization parameters, they can be set in the form `"Model.Param.TimeLimit = 10"`. For details of the parameter names supported, please refer to [Parameters](#) section.

Class Model contains COPT model-related operations and provides the following methods:

### 19.2.3.1 Model.addVar()

#### Synopsis

```
addVar(lb=0.0, ub=COPT.INFINITY, obj=0.0, vtype=COPT.CONTINUOUS,
name="", column=None)
```

#### Description

Add a decision variable to model and return the added [Var Class](#) object.

#### Arguments

**lb**

Lower bound for new variable. Optional, 0.0 by default.

**ub**

Upper bound for new variable. Optional, `COPT.INFINITY` by default.

**obj**

Objective parameter for new variable. Optional, 0.0 by default.

**vtype**

Variable type. Optional, `COPT.CONTINUOUS` by default. Please refer to [Variable types](#) for possible types.

**name**

Name for new variable. Optional, "" by default, which is automatically generated by solver.

**column**

Column corresponds to the variable. Optional, None by default.

### Example

```
# Add a continuous variable
x = m.addVar()
# Add a binary variable
y = m.addVar(vtype=COPT.BINARY)
# Add an integer variable with lowerbound -1.0, upperbound 1.0, objective coefficient 1.0 and
↪variable name "z"
z = m.addVar(-1.0, 1.0, 1.0, COPT.INTEGER, "z")
```

### 19.2.3.2 Model.addVars()

#### Synopsis

```
addVars(*indices, lb=0.0, ub=COPT.INFINITY, obj=0.0, vtype=COPT.
CONTINUOUS, nameprefix="C")
```

#### Description

Add multiple new variables to a model. Return a *tupledict Class*, whose key is indice of the variable and value is the *Var Class* object.

#### Arguments

**\*indices**

Indices for accessing the new variables.

**lb**

Lower bounds for new variables. Optional, 0.0 by default.

**ub**

Upper bounds for new variables. Optional, COPT.INFINITY by default.

**obj**

Objective costs for new variables. Optional, 0.0 by default.

**vtype**

Variable types. Optional, COPT.CONTINUOUS by default. Please refer to Variable types for possible types.

**nameprefix**

Name prefix for new variables. Optional, "C" by default. The actual name and the index of the variable are automatically generated by COPT.

### Example

```
# Add three-dimensional integer variable, 6 variables in total
x = m.addVars(1, 2, 3, vtype=COPT.INTEGER)
# Add two continuous variable y, whose indice is designated by elements in tuplelist and
↪prefix is "tl"
tl = tuplelist([(0, 1), (1, 2)])
y = m.addVars(tl, nameprefix="tl")
```

### 19.2.3.3 Model.addConstr()

#### Synopsis

```
addConstr(lhs, sense=None, rhs=None, name="")
```

#### Description

Add a linear constraint, a positive semi-definite constraint or an indicator constraint to a model, and return the added *Constraint Class* object, *PsdConstraint Class* object or *GenConstr Class* object.

If a linear constraint added, then the parameter `lhs` can take the value of *Var Class* object, *LinExpr Class* object or *ConstrBuilder Class* object; If a positive semi-definite constraint added, then the parameter `lhs` can take the value of *PsdExpr Class* object, or *PsdConstrBuilder Class* object; If an indicator constraint added, then the parameter `lhs` is *GenConstrBuilder Class* object, ignoring other parameters.

#### Arguments

`lhs`

Left-hand side expression for new linear constraint or constraint builder.

`sense`

Sense for the new constraint. Optional, None by default. Please refer to Constraint type for possible values.

`rhs`

Right-hand side expression for the new constraint. Optional, None by default. Can be a constant, or *Var Class* object, or *LinExpr Class* object.

`name`

Name for new constraint. Optional, "" by default, generated by solver automatically.

#### Example

```
# Add a linear constraint: x + y == 2
m.addConstr(x + y, COPT.EQUAL, 2)
# Add a linear constraint: x + 2*y >= 3
m.addConstr(x + 2*y >= 3.0)
# Add an indicator constraint
m.addConstr((x == 1) >> (2*y + 3*z <= 4))
```

### 19.2.3.4 Model.addBoundConstr()

#### Synopsis

```
addBoundConstr(expr, lb=-COPT.INFINITY, ub=COPT.INFINITY, name="")
```

#### Description

Add a constraint with a lower bound and an upper bound to a model and return the added *Constraint Class* object.

#### Arguments

`expr`

Expression for the new constraint. Can be *Var Class* object or *LinExpr Class* object.

`lb`

Lower bound for the new constraint. Optional, `-COPT.INFINITY` by default.

`ub`

Upper bound for the new constraint. Optional, `COPT.INFINITY` by default.

`name`

Name for new constraint. Optional, "" by default, automatically generated by solver.

### Example

```
# Add linear bilateral constraint: -1 <= x + y <= 1
m.addBoundConstr(x + y, -1.0, 1.0)
```

### 19.2.3.5 Model.addConstrs()

#### Synopsis

```
addConstrs(generator, nameprefix="R")
```

#### Description

Add a set of linear constraints to a model.

If parameter `generator` is integer, the return a *ConstrArray Class* object consisting of `generator` number of empty *Constraint Class* objects, and users need to specify these constraints.

If parameter `generator` is expression generator, then return a *tupledict Class* object whose key is the indice of linear constraint and value is the corresponding *Constraint Class* object. Every iteration generates a *Constraint Class* object.

#### Arguments

`generator`

A generator expression, where each iteration produces a *Constraint Class* object.

`nameprefix`

Name prefix for new constraints. Optional, "C" by default. The actual name and the index of the variable are automatically generated by COPT.

### Example

```
# Add 10 linear constraints, each constraint shaped like: x[0] + y[0] >= 2.0
m.addConstrs(x[i] + y[i] >= 2.0 for i in range(10))
```

### 19.2.3.6 Model.addSOS()

#### Synopsis

```
addSOS(sostype, vars, weights=None)
```

#### Description

Add a SOS constraint to model and return the added *SOS Class* object.

If param `sostype` is *SOSBuilder Class* object, then the values of param `vars` and param `weights` will be ignored;

If param `sostype` is SOS constraint type, it can be valued as SOS-constraint types, then param `vars` represents variables of SOS constraint, taking the value of *VarArray Class* object, list, dict or *tupledict Class* object;

If param `weights` is `None`, then variable weights of SOS constraints will be automatically generated by solver. Otherwise take the input from user as weights, possible values can be list, dictionary or *tupledict Class* object.

#### Arguments

`sostype`

SOS constraint type or SOS constraint builder.

`vars`

Variables of SOS constraints.

`weights`

Weights of variables in SOS constraints, optional, `None` by default.

#### Example

```
# Add an SOS1 constraint, including variable x and y, weights of 1 and 2.
m.addSOS(COPT.SOS_TYPE1, [x, y], [1, 2])
```

### 19.2.3.7 Model.addGenConstrIndicator()

#### Synopsis

```
addGenConstrIndicator(binvar, binval, lhs, sense=None, rhs=None)
```

#### Description

Add an Indicator constraint to a model and return the added *GenConstr Class* object.

If the parameter `lhs` is *ConstrBuilder Class* object, then the values of parameter `sense` and parameter `rhs` will be ignored.

If parameter `lhs` represents Left-hand side expression, it can take value of *Var Class* object or *LinExpr Class* object.

#### Arguments

`binvar`

Indicator variable.

`binval`

Value of indicator variable, can be `True` or `False`.

`lhs`

Left-hand side expression for the linear constraint triggered by the indicator or linear constraint builder.

`sense`

Sense for the linear constraint. Optional, `None` by default. Please refer to Constraint type for possible values.

`rhs`

Right-hand-side value for the linear constraint triggered by the indicator. Optional, `None` by default, value type is constant.

#### Example

```
# Add an indicator constraint, if x is True, then the linear constraint y + 2*z >= 3 should
↪hold.
m.addGenConstrIndicator(x, True, y + 2*z >= 3)
```

### 19.2.3.8 Model.addConeByDim()

#### Synopsis

```
addConeByDim(dim, ctype, vtype, nameprefix="ConeV")
```

#### Description

Add a Second-Order-Cone (SOC) constraint with given dimension, and return the added *Cone Class* object.

#### Arguments

**dim**

Dimension of SOC constraint.

**ctype**

Type of SOC constraint.

**vtype**

Variable types of SOC constraint.

**nameprefix**

Name prefix of variables in SOC constraint. Optional, default to "ConeV".

#### Example

```
# Add a 5 dimension rotated SOC constraint
m.addConeByDim(5, COPT.CONE_RQUAD, None)
```

### 19.2.3.9 Model.addCone()

#### Synopsis

```
addCone(vars, ctype)
```

#### Description

Add a Second-Order-Cone (SOC) constraint with given variables.

If argument **vars** is a *ConeBuilder Class* object, then the value of argument **ctype** will be ignored; If argument **vars** are variables, the optional values are *VarArray Class* objects, Python list, Python dictionary or *tupledict Class* objects, argument **ctype** is the type of SOC constraint.

#### Arguments

**vars**

Variables of SOC constraint.

**ctype**

Type of SOC constraint.

#### Example

```
# Add a SOC constraint with [z, x, y] as variables
m.addCone([z, x, y], COPT.CONE_QUAD)
```



#### 19.2.3.10 Model.addQConstr()

##### Synopsis

```
addQConstr(lhs, sense=None, rhs=None, name="")
```

##### Description

Add a linear or quadratic constraint, and return the added *Constraint Class* object or *QConstraint Class* object.

If the constraint is linear, then value of parameter `lhs` can be taken *Var Class* object, *LinExpr Class* object or *ConstrBuilder Class* object; If the constraint is quadratic, then value of parameter `lhs` can be taken *QConstrBuilder Class* object, and other parameters will be ignored.

##### Arguments

`lhs`

Left-hand side expression for new constraint or constraint builder.

`sense`

Sense for the new constraint. Optional, None by default. Please refer to Constraint type for possible values.

`rhs`

Right-hand side expression for the new constraint. Optional, None by default. Can be a constant, *Var Class* object, *LinExpr Class* object or *QuadExpr Class* object.

`name`

Name for new constraint. Optional, "" by default, generated by solver automatically.

##### Example

```
# add a linear equality: x + y == 2
m.addQConstr(x + y, COPT.EQUAL, 2)
# add a quadratic inequality: x*x + y*y <= 3
m.addQConstr(x*x + y*y <= 3.0)
```

#### 19.2.3.11 Model.addPsdVar()

##### Synopsis

```
addPsdVar(dim, name="")
```

##### Description

Add a positive semi-definite variable.

##### Arguments

`dim`

Dimension for the positive semi-definite variable.

`name`

Name for the positive semi-definite variable.

##### Example

```
# Add a three-dimensional positive semi-definite variable, "X"
m.addPsdVar(3, "X")
```

**19.2.3.12 Model.addPsdVars()****Synopsis**

```
addPsdVars(dims, nameprefix="PSDV")
```

**Description**

Add multiple new positive semi-definite variables to a model.

**Arguments**

`dim`

Dimensions for new positive semi-definite variables.

`nameprefix`

Name prefix for new positive semi-definite variables.

**Example**

```
# Add two three-dimensional positive semi-definite variables
m.addPsdVars([3, 3])
```

**19.2.3.13 Model.addSparseMat()****Synopsis**

```
addSparseMat(dim, rows, cols=None, vals=None)
```

**Description**

Add a sparse symmetric matrix in triplet format

**Arguments**

`dim`

Dimension for the matrix.

`rows`

Row indices for accessing rows of non-zero elements.

`cols`

Column indices for accessing columns of non-zero elements.

`vals`

Coefficient values for non-zero elements

**Example**

```
# Add a tree-dimensional symmetric matrix
m.addSparseMat(3, [0, 1, 2], [0, 1, 2], [2.0, 5.0, 8.0])
```

#### 19.2.3.14 Model.addDenseMat()

##### Synopsis

```
addDenseMat(dim, vals)
```

##### Description

Add a dense symmetric matrix

##### Arguments

`dim`

Dimension for the matrix.

`vals`

Coefficient values. Can be a constant or a list.

##### Example

```
# Add a tree-dimentional matrix (filled with ones)
m.addDenseMat(3, 1.0)
```

#### 19.2.3.15 Model.addDiagMat()

##### Synopsis

```
addDiagMat(dim, vals, offset=None)
```

##### Description

Add a diagnal symmetric matrix

##### Arguments

`dim`

Dimension for the matrix.

`vals`

Coefficient values. Can be a constant or a list.

`offset`

Offset of diagnal elements. Positive: above the diagnal; Negative: below the diagnal

##### Example

```
# Add a tree-dimentional identity matrix
m.addDiagMat(3, 1.0)
```

#### 19.2.3.16 Model.addOnesMat()

##### Synopsis

```
addOnesMat(dim)
```

##### Description

Add a matrix filled with ones.

##### Arguments

`dim`

Dimension for the matrix.

#### Example

```
# Add a tree-dimentional matrix (filled with ones)
m.addOnesMat(3)
```

#### 19.2.3.17 Model.addEyeMat()

##### Synopsis

`addEyeMat(dim)`

##### Description

Add an identity matrix

##### Arguments

`dim`

Dimension for the matrix.

#### Example

```
# Add a tree-dimentional identity matrix
m.addEyeMat(3)
```

#### 19.2.3.18 Model.setObjective()

##### Synopsis

`setObjective(expr, sense=None)`

##### Description

Set the model objective.

##### Arguments

`expr`

Objective expression. Argument can be a constant, or *Var Class* object, or *LinExpr Class* object.

`sense`

Optimization sense. Optional, `None` by default, which means no change to objective sense. Users can get access to current objective sense by attribute `ObjSense`. Please refer to Optimization directions for possible values.

#### Example

```
# Set objective function = x+y, optimization sense is maximization.
m.setObjective(x + y, COPT.MAXIMIZE)
```

#### 19.2.3.19 Model.setObjSense()

##### Synopsis

```
setObjSense(sense)
```

##### Description

Set optimization sense.

##### Arguments

sense

Optimization sense. Please refer to Optimization directions for possible values.

##### Example

```
# Set optimization sense as maximization
m.setObjSense(COPT.MAXIMIZE)
```

#### 19.2.3.20 Model.setObjConst()

##### Synopsis

```
setObjConst(const)
```

##### Description

Set constant objective offset.

##### Arguments

const

Constant objective offset.

##### Example

```
# Set constant objective offset 1.0
m.setObjConst(1.0)
```

#### 19.2.3.21 Model.getObjective()

##### Synopsis

```
getObjective()
```

##### Description

Retrieve current model objective. Return a *LinExpr Class* object.

##### Example

```
# Retrieve the optimization objective.
obj = m.getObjective()
```

#### 19.2.3.22 Model.delQuadObj()

##### Synopsis

```
delQuadObj()
```

##### Description

Deletes the quadratic terms from the quadratic objective function.

##### Example

```
# Deletes the quadratic terms from the quadratic objective function
m.delQuadObj()
```

#### 19.2.3.23 Model.delPsdObj()

##### Synopsis

```
delPsdObj()
```

##### Description

Delete the positive semi-definite terms from the objective function

##### Example

```
# Delete the positive semi-definite terms from the objective function
m.delPsdObj()
```

#### 19.2.3.24 Model.getCol()

##### Synopsis

```
getCol(var)
```

##### Description

Retrieve the list of constraints in which a variable participates, Return value is a *Column Class* object that captures the set of constraints in which the variable participates.

##### Example

```
# Get column that captures the set of constraints in which x participates.
col = m.getCol(x)
```

#### 19.2.3.25 Model.getRow()

##### Synopsis

```
getRow(constr)
```

**Description** Retrieve the list of variables that participate in a specific constraint and return a *LinExpr Class* object.

##### Example

```
# Return variables that participate in conx.
linexpr = m.getRow(conx)
```

#### 19.2.3.26 Model.getQuadRow()

##### Synopsis

```
getQuadRow(qconstr)
```

##### Description

Retrieve the list of variables that participate in a specific quadratic constraint and return a *QuadExpr Class* object.

##### Example

```
# Return variables that participate in qconx
quadexpr = m.getQuadRow(qconx)
```

#### 19.2.3.27 Model.getPsdRow()

##### Synopsis

```
getPsdRow(constr)
```

##### Description

Retrieve the list of variables that participate in a specific positive semi-definite constraint and return a *PsdExpr Class* object.

##### Example

```
# Retrieve the row corresponding to a specific positive semi-definite constraint
psdexpr = m.getPsdRow(psdcon)
```

#### 19.2.3.28 Model.getVar()

##### Synopsis

```
getVar(idx)
```

##### Description

Retrieve a variable according to its index in the coefficient matrix. Return a *Var Class* object.

##### Arguments

`idx`

Index of the desired variable in the coefficient matrix, starting with 0.

##### Example

```
# Retrieve variable with indice of 1.
x = m.getVar(1)
```

**19.2.3.29 Model.getVarByName()****Synopsis**

```
getVarByName(name)
```

**Description**

Retrieves a variable by name. Return a *Var Class* object.

**Arguments**

name

Name of the desired variable.

**Example**

```
# Retrieve variable with name "x".
x = m.getVarByName("x")
```

**19.2.3.30 Model.getVars()****Synopsis**

```
getVars()
```

**Description**

Retrieve all variables in the model. Return a *VarArray Class* object.

**Example**

```
# Retrieve all variables in the model
vars = m.getVars()
```

**19.2.3.31 Model.getConstr()****Synopsis**

```
getConstr(idx)
```

**Description**

Retrieve a constraint by its indice in the coefficient matrix. Return a *Constraint Class* object.

**Arguments**

idx

Index of the desired constraint in the coefficient matrix, starting with 0.

**Example**

```
# Retrieve linear constraint with indice of 1.
r = m.getConstr(1)
```



#### 19.2.3.32 Model.getConstrByName()

##### Synopsis

```
getConstrByName(name)
```

##### Description

Retrieves a linear constraint by name. Return a *Constraint Class* object.

##### Arguments

name

The name of the constraint.

##### Example

```
# Retrieve linear constraint with name "r".
r = m.getConstrByName("r")
```

#### 19.2.3.33 Model.getConstrs()

##### Synopsis

```
getConstrs()
```

##### Description

Retrieve all constraints in the model. Return a *ConstrArray Class* object.

##### Example

```
# Retrieve all constraints in the model
cons = m.getConstrs()
```

#### 19.2.3.34 Model.getConstrBuilders()

##### Synopsis

```
getConstrBuilders(constrs=None)
```

##### Description

Retrieve linear constraint builders in current model.

If parameter **constrs** is **None**, then return a *ConstrBuilderArray Class* object composed of all linear constraint builders.

If parameter **constrs** is *Constraint Class* object, then return the *ConstrBuilder Class* object corresponding to the specific constraint.

If parameter **constrs** is a list or a *ConstrArray Class* object, then return a *ConstrBuilderArray Class* object composed of specified constraints' builders.

If parameter **constrs** is dictionary or *tupledict Class* object, then the indice of the specified constraint is returned as key, the value is a *tupledict Class* object composed of the specified constraints' builders.

##### Arguments

constrs

The specified linear constraint. Optional, **None** by default.

##### Example

```
# Retrieve all of linear constraint builders.
conbuilders = m.getConstrBuilders()
# Retrieve the builder corresponding to linear constraint x.
conbuilders = m.getConstrBuilders(x)
# Retrieve builders corresponding to linear constraint x and y.
conbuilders = m.getConstrBuilders([x, y])
# Retrieve builders corresponding to linear constraint in tupledict object xx.
conbuilders = m.getConstrBuilders(xx)
```

### 19.2.3.35 Model.getSOS(sos)

#### Synopsis

```
getSOS(sos)
```

#### Description

Retrieve the SOS constraint builder corresponding to specific SOS constraint. Return a *SOSBuilder Class* object

#### Arguments

sos

The specified SOS constraint.

#### Example

```
# Retrieve the builder corresponding to SOS constraint sosx.
sosbuilder = m.getSOS(sosx)
```

### 19.2.3.36 Model.getSOSs()

#### Synopsis

```
getSOSs()
```

#### Description

Retrieve all SOS constraints in model and return a *SOSArray Class* object.

#### Example

```
# Retrieve all SOS constraints in model.
soss = m.getSOSs()
```

### 19.2.3.37 Model.getSOSBuilders()

#### Synopsis

```
getSOSBuilders(soss=None)
```

#### Description

Retrieve the SOS constraint builder corresponding to the specified SOS constraint.

If parameter `soss` is `None`, then return a *SOSBuilderArray Class* object consisting of builders corresponding to all SOS constraints.

If parameter `soss` is *SOS Class* object, then return a *SOSBuilder Class* corresponding to the specified SOS constraint.

If parameter `soss` is list or *SOSArray Class* object, then return a *SOSBuilderArray Class* object consisting of builders corresponding to the specific SOS constraints.

### Arguments

`soss` The specific SOS constraint. Optional, `None` by default.

### Example

```
# Retrieve builders corresponding to all SOS constraints in the model.
soss = m.getSOSBuilders()
```

#### 19.2.3.38 Model.getGenConstrIndicator()

### Synopsis

```
getGenConstrIndicator(genconstr)
```

### Description

Retrieve the builder corresponding to specific Indicator constraint. Return a *GenConstrBuilder Class* object.

### Arguments

`genconstr`

The specified Indicator constraint.

### Example

```
# Retrieve the builder corresponding to Indicator constraint genx.
indic = m.getGenConstrIndicator(genx)
```

#### 19.2.3.39 Model.getCones()

### Synopsis

```
getCones()
```

### Description

Retrieve all Second-Order-Cone (SOC) constraints in model, and return a *ConeArray Class* object.

### Example

```
# Retrieve all SOC constraints
cones = m.getCones()
```

#### 19.2.3.40 Model.getConeBuilders()

### Synopsis

```
getConeBuilders(cones=None)
```

### Description

Retrieve Second-Order-Cone (SOC) constraint builders for given SOC constraints.

If argument `cones` is `None`, then return a *ConeBuilderArray Class* object consists of all SOC constraints' builders; If argument `cones` is *Cone Class* object, then return a *ConeBuilder Class* object of given SOC constraint; If `cones` is Python list or *ConeArray Class* object, then return a *ConeBuilderArray Class* object consists of builders of given SOC constraints.

### Arguments

cones

Given SOC constraints. Optional, default to None.

#### Example

```
# Retrieve all SOC constraints' builders
cones = m.getConeBuilders()
```

#### 19.2.3.41 Model.getQConstr()

##### Synopsis

getQConstr(idx)

##### Description

Retrieve a quadratic constraint by its indice, and return a *QConstraint Class* object.

##### Arguments

idx

Index of the desired quadratic constraint, starting with 0.

#### Example

```
# Retrieve a quadratic constraint with indice of 1
qr = m.getQConstr(1)
```

#### 19.2.3.42 Model.getQConstrByName()

##### Synopsis

getQConstrByName(name)

##### Description

Retrieve a quadratic constraint by its name, and return a *QConstraint Class* object.

##### Arguments

name

Name of the desired quadratic constraint.

#### Example

```
# Retrieve a quadratic constraint with name "qr"
qr = m.getQConstrByName("qr")
```

#### 19.2.3.43 Model.getQConstrs()

##### Synopsis

getQConstrs()

##### Description

Retrieve all quadratic constraints in the model. Return a *QConstrArray Class* object.

#### Example

```
# Retrieve all quadratic constraints in the model
qcons = m.getQConstrs()
```

#### 19.2.3.44 Model.getQConstrBuilders()

##### Synopsis

```
getQConstrBuilders(qconstrs=None)
```

##### Description

Retrieve quadratic constraint builders in current model.

If parameter `qconstrs` is `None`, then return a *QConstrBuilderArray Class* object composed of all quadratic constraint builders.

If parameter `qconstrs` is *QConstraint Class* object, then return the *QConstrBuilder Class* object corresponding to the specific quadratic constraint.

If parameter `qconstrs` is a list or a *QConstrArray Class* object, then return a *QConstrBuilderArray Class* object composed of specified quadratic constraints' builders.

If parameter `qconstrs` is dictionary or *tupledict Class* object, then the indice of the specified quadratic constraint is returned as key, the value is a *tupledict Class* object composed of the specified quadratic constraints' builders.

##### Arguments

`qconstrs`

The specified quadratic constraint. Optional, `None` by default.

##### Example

```
# Retrieve all of quadratic constraint builders.
qconbuilders = m.getQConstrBuilders()
# Retrieve the builder corresponding to quadratic constraint qx.
qconbuilders = m.getQConstrBuilders(qx)
# Retrieve builders corresponding to quadratic constraint qx and qy.
qconbuilders = m.getQConstrBuilders([qx, qy])
# Retrieve builders corresponding to quadratic constraint in tupledict object qxx.
qconbuilders = m.getQConstrBuilders(qxx)
```

#### 19.2.3.45 Model.getPsdVar()

##### Synopsis

```
getPsdVar(idx)
```

##### Description

Retrieve a positive semi-definite variable according to its index in the model. Return a *PsdVar Class* object.

##### Arguments

`idx`

Index of the desired positive semi-definite variable in the model, starting with 0.

##### Example

```
# Retrieve a positive semi-definite variable with index of 1
x = m.getPsdVar(1)
```

**19.2.3.46 Model.getPsdVarByName()****Synopsis**

```
getPsdVarByName(name)
```

**Description**

Retrieve a positive semi-definite variable by name. Return a *PsdVar Class* object.

**Arguments**

name

The name of the positive semi-definite variable.

**Example**

```
# Retrieve a positive semi-definite variable with name "x".
x = m.getPsdVarByName("x")
```

**19.2.3.47 Model.getPsdVars()****Synopsis**

```
getPsdVars()
```

**Description**

Retrieve all positive semi-definite variables in the model, and return a *PsdVarArray Class* object.

**Example**

```
# Retrieve all positive semi-definite variables in the model.
vars = m.getPsdVars()
```

**19.2.3.48 Model.getPsdConstr()****Synopsis**

```
getPsdConstr(idx)
```

**Description**

Retrieve the positive semi-definite constraint according to its index in the model. Return a *PsdConstraint Class* object.

**Arguments**

idx

Index for the positive semi-definite constraint, starting with 0.

**Example**

```
# Retrieve the positive semi-definite constraint with index of 1
r = m.getPsdConstr(1)
```

#### 19.2.3.49 Model.getPsdConstrByName()

##### Synopsis

```
getPsdConstrByName(name)
```

##### Description

Retrieve a positive semi-definite constraint by name. Return a *PsdConstraint Class* object.

##### Arguments

name

The name of the positive semi-definite constraint.

##### Example

```
# Retrieve the positive semi-definite constraint with name "r".
r = m.getPsdConstrByName("r")
```

#### 19.2.3.50 Model.getPsdConstrs()

##### Synopsis

```
getPsdConstrs()
```

##### Description

Retrieve all positive semi-definite constraints in the model. Return a *PsdConstrArray Class* object.

##### Example

```
# Retrieve all positive semi-definite constraints in the model
cons = m.getPsdConstrs()
```

#### 19.2.3.51 Model.getPsdConstrBuilders()

##### Synopsis

```
getPsdConstrBuilders(constrs=None)
```

##### Description

Retrieve positive semi-definite constraint builders in current model.

If parameter **constrs** is **None**, then return a *PsdConstrBuilderArray Class* object composed of all positive semi-definite constraint builders.

If parameter **constrs** is *PsdConstraint Class* object, then return the *PsdConstrBuilder Class* object corresponding to the specific positive semi-definite constraint.

If parameter **constrs** is a list or a *PsdConstrArray Class* object, then return a *PsdConstrBuilderArray Class* object composed of specified positive semi-definite constraints' builders.

If parameter **constrs** is dictionary or *tupledict Class* object, then the indice of the specified positive semi-definite constraint is returned as key, the value is a *tupledict Class* object composed of the specified positive semi-definite constraints' builders.

##### Arguments

constrs

The specified positive semi-definite constraint. Optional, **None** by default.

**Example**

```
# Retrieve all of positive semi-definite constraint builders.
conbuilders = m.getPsdConstrBuilders()
# Retrive the builder corresponding to positive semi-definite contstraint x.
conbuilders = m.getPsdConstrBuilders(x)
# Retrieve builders corresponding to positive semi-definite constraint x and y.
conbuilders = m.getPsdConstrBuilders([x, y])
# Retrieve builders corresponding to positive semi-definite constraint in tupledict object xx.
conbuilders = m.getPsdConstrBuilders(xx)
```

**19.2.3.52 Model.getCoeff()****Synopsis**

```
getCoeff(constr, var)
```

**Description**

Get the coefficient of variable in linear constraint.

**Arguments**

`constr`

The requested linear constraint.

`var`

The requested variable.

**Example**

```
# Get the coefficient of variable x in linear constraint c
coeff = m.getCoeff(c, x)
```

**19.2.3.53 Model.setCoeff()****Synopsis**

```
setCoeff(constr, var, newval)
```

**Description**

Set the coefficient of variable in linear constraint.

**Arguments**

`constr`

The requested linear constraint.

`var`

The requested variable.

`newval`

New coefficient.

**Example**

```
# Set the coefficient of variable x in linear constraint c to 1.0
m.setCoeff(c, x, 1.0)
```



#### 19.2.3.54 Model.getA()

##### Synopsis

getA()

##### Description

Get the coefficient matrix of model, returns a `scipy.sparse.csc_matrix` object.  
This method requires the `scipy` package.

##### Example

```
# Get the coefficient matrix
A = model.getA()
```

#### 19.2.3.55 Model.loadMatrix()

##### Synopsis

loadMatrix(c, A, lhs, rhs, lb, ub, vtype=None)

##### Description

Load matrix and vector data to build model. This method requires the `scipy` package.

##### Arguments

c

Objective costs. If `None`, the objective costs are all zeros.

A

Coefficient matrix. Must be of type `scipy.sparse.csc_matrix`.

lhs

Lower bounds of constraints.

rhs

Upper bounds of constraints.

lb

Lower bounds of variables. If `None`, the lower bounds are all zeros.

ub

Upper bounds of variables. If `None`, the upper bounds are all COPT.  
INFINITY.

vtype

Variable types. Default to `None`, which means all variables are continuous.

##### Example

```
# Build model by problem matrix
m.loadMatrix(c, A, lhs, rhs, lb, ub)
```

**19.2.3.56 Model.getLpSolution()****Synopsis**

```
getLpSolution()
```

**Description**

Retrieve the values of variables, slack variables, dual variables and reduced cost of variables. Return a quad tuple object, in which each element is a list.

**Example**

```
# Retrieve solutions of linear model.
values, slacks, duals, redcosts = m.getLpSolution()
```

**19.2.3.57 Model.setLpSolution()****Synopsis**

```
setLpSolution(values, slack, duals, redcost)
```

**Description**

Set LP solution.

**Arguments**

**values**

Solution of variables.

**slack**

Solution of slack variables.

**duals**

Solution of dual variables.

**redcost**

Reduced costs of variables.

**Example**

```
# Set LP solution
m.setLpSolution(values, slack, duals, redcost)
```

**19.2.3.58 Model.getValues()****Synopsis**

```
getValues()
```

**Description**

Retrieve solution values of all variables in a LP or MIP. Return a Python list.

**Example**

```
values = m.getValues()
```

#### 19.2.3.59 Model.getRedcosts()

##### Synopsis

```
getRedcosts()
```

##### Description

Retrieve reduced costs of all variables in a LP. Return a list.

##### Example

```
# Retrieve reduced cost of all variables in model.
redcosts = m.getRedcosts()
```

#### 19.2.3.60 Model.getSlacks()

##### Synopsis

```
getSlacks()
```

##### Description

Retrieve values of all slack variables in a LP. Return a Python list.

##### Example

```
# Retrieve value of all slack variables in model.
slacks = m.getSlacks()
```

#### 19.2.3.61 Model.getDUALS()

##### Synopsis

```
getDuals()
```

##### Description

Obtain values of all dual variables in a LP. Return a Python list.

##### Example

```
# Retrieve value of all dual variables in model.
duals = m.getDuals()
```

#### 19.2.3.62 Model.getVarBasis()

##### Synopsis

```
getVarBasis(vars=None)
```

##### Description

Obtain basis status of specified variables.

If parameter **vars** is **None**, then return a list object consistinf of all variables' basis status. If parameter **vars** is *Var Class* object, then return basis status of the specified variable. If parameter **vars** is list or *VarArray Class* object, then return a list object consisting of the specified variables' basis status. If parameter **vars** is dictionary or *tupledict Class* object, then return indice of the specified variable as key and *tupledict Class* object consisting of the specified variables' basis status as value.

##### Arguments

`vars`

The specified variables. Optional, `None` by default,

#### Example

```
# Retrieve all variables' basis status in model.
varbasis = m.getVarBasis()
# Retrieve basis status of variable x and y.
varbasis = m.getVarBasis([x, y])
# Retrieve basis status of tupledict object xx.
varbasis = m.getVarBasis(xx)
```

### 19.2.3.63 Model.getConstrBasis()

#### Synopsis

`getConstrBasis(constrs=None)`

#### Description

Obtain the basis status of linear constraints in LP.

If parameter `constrs` is `None`, then return a list object consisting of all linear constraints' basis status. If parameter `constrs` is *Constraint Class* object, then return basis status of the specified linear constraint. If parameter `constrs` is list or *ConstrArray Class* object, then return a list object consisting of the specified linear constraints' basis status. If parameter `constrs` is dictionary or *tupledict Class* object, then return the indice of the specified linear constraint as key and return *tupledict Class* object consisting of the specified linear constraints' basis status as value.

#### Arguments

`constrs`

The specified linear constraint. Optional, `None` by default.

#### Example

```
# Retrieve all linear constraints' basis status in model.
conbasis = m.getConstrBasis()
# Retrieve basis status corresponding to linear constraint r0 and r1 in model.
conbasis = m.getConstrBasis([r0, r1])
# Retrieve basis status of linear constraints in tupledict rr.
conbasis = m.getConstrBasis(rr)
```

### 19.2.3.64 Model.getPoolObjVal()

#### Synopsis

`getPoolObjVal(isol)`

#### Description

Obtain the `isol` -th objective value in solution pool, return a constant.

#### Arguments

`isol`

Index of solution.

#### Example

```
# Obtain the second objective value
objval = m.getPoolObjVal(2)
```

### 19.2.3.65 Model.getPoolSolution()

#### Synopsis

```
getPoolSolution(isol, vars)
```

#### Description

Obtain variable values in the `isol` -th solution of solution pool.

If parameter `vars` is *Var Class* object, then return values of the specified variable. If parameter `vars` is list or *VarArray Class* object, then return a list object consisting of the specified variables' values. If parameter `vars` is dictionary or *tupledict Class* object, then return indice of the specified variable as key and *tupledict Class* object consisting of the specified variables' values as value.

#### Arguments

`isol`

Index of solution

`vars`

The specified variables.

#### Example

```
# Get value of x in the second solution
xval = m.getPoolSolution(2, x)
```

### 19.2.3.66 Model.getVarLowerIIS()

#### Synopsis

```
getVarLowerIIS(vars)
```

#### Description

Obtain IIS status of lower bounds of variables.

If parameter `vars` is *Var Class* object, then return IIS status of lower bound of variable. If parameter `vars` is list or *VarArray Class* object, then return a list object consisting of the IIS status of lower bounds of variables. If parameter `vars` is dictionary or *tupledict Class* object, then return indice of the specified variable as key and *tupledict Class* object consisting of the IIS status of lower bounds of variables as value.

#### Arguments

`vars`

The specified variables.

#### Example

```
# Retrieve IIS status of lower bounds of variable x and y.
lowerIIS = m.getVarLowerIIS([x, y])
# Retrieve IIS status of lower bounds of variables in tupledict object xx.
lowerIIS = m.getVarLowerIIS(xx)
```

### 19.2.3.67 Model.getVarUpperIIS()

#### Synopsis

getVarUpperIIS(vars)

#### Description

Obtain IIS status of upper bounds of variables.

If parameter **vars** is *Var Class* object, then return IIS status of upper bound of variable. If parameter **vars** is list or *VarArray Class* object, then return a list object consisting of the IIS status of upper bounds of variables. If parameter **vars** is dictionary or *tupledict Class* object, then return indice of the specified variable as key and *tupledict Class* object consisting of the IIS status of upper bounds of variables as value.

#### Arguments

vars

The specified variables.

#### Example

```
# Retrieve IIS status of upper bounds of variable x and y.
upperIIS = m.getVarUpperIIS([x, y])
# Retrieve IIS status of upper bounds of variables in tupledict object xx.
upperIIS = m.getVarUpperIIS(xx)
```

### 19.2.3.68 Model.getConstrLowerIIS()

#### Synopsis

getConstrLowerIIS(constrs)

#### Description

Obtain the IIS status of lower bounds of constraints.

If parameter **constrs** is *Constraint Class* object, then return IIS status of lower bound of constraint. If parameter **constrs** is list or *ConstrArray Class* object, then return a list object consisting of the IIS status of lower bounds of constraints. If parameter **constrs** is dictionary or *tupledict Class* object, then return the indice of the specified linear constraint as key and return *tupledict Class* object consisting of the IIS status of lower bounds of constraints.

#### Arguments

constrs

The specified linear constraint.

#### Example

```
# Retrieve IIS status corresponding to lower bounds of linear constraint r0 and r1 in model.
lowerIIS = m.getConstrLowerIIS([r0, r1])
# Retrieve IIS status of lower bounds of linear constraints in tupledict rr.
lowerIIS = m.getConstrLowerIIS(rr)
```

### 19.2.3.69 Model.getConstrUpperIIS()

#### Synopsis

```
getConstrUpperIIS(constrs)
```

#### Description

Obtain the IIS status of upper bounds of constraints.

If parameter `constrs` is *Constraint Class* object, then return IIS status of upper bound of constraint. If parameter `constrs` is list or *ConstrArray Class* object, then return a list object consisting of the IIS status of upper bounds of constraints. If parameter `constrs` is dictionary or *tupledict Class* object, then return the indice of the specified linear constraint as key and return *tupledict Class* object consisting of the IIS status of upper bounds of constraints.

#### Arguments

`constrs`

The specified linear constraint.

#### Example

```
# Retrieve IIS status corresponding to upper bounds of linear constraint r0 and r1 in model.
upperIIS = m.getConstrUpperIIS([r0, r1])
# Retrieve IIS status of upper bounds of linear constraints in tupledict rr.
upperIIS = m.getConstrUpperIIS(rr)
```

### 19.2.3.70 Model.getSOSIIS()

#### Synopsis

```
getSOSIIS(soss)
```

#### Description

Obtain the IIS status of SOS constraints.

If parameter `soss` is *SOS Class* object, then return IIS status of SOS constraint. If parameter `soss` is list or *SOSArray Class* object, then return a list object consisting of the IIS status of SOS constraints. If parameter `soss` is dictionary or *tupledict Class* object, then return the indice of the specified SOS constraint as key and return *tupledict Class* object consisting of the IIS status of SOS constraints.

#### Arguments

`soss`

The specified SOS constraint.

#### Example

```
# Retrieve IIS status corresponding to SOS constraint r0 and r1 in model.
sosIIS = m.getSOSIIS([r0, r1])
# Retrieve IIS status of SOS constraints in tupledict rr.
sosIIS = m.getSOSIIS(rr)
```

### 19.2.3.71 Model.getIndicatorIIS()

#### Synopsis

```
getIndicatorIIS(genconstrs)
```

#### Description

Obtain the IIS status of indicator constraints.

If parameter **genconstrs** is *GenConstr Class* object, then return IIS status of indicator constraint. If parameter **genconstrs** is list or *GenConstrArray Class* object, then return a list object consisting of the IIS status of indicator constraints. If parameter **genconstrs** is dictionary or *tupledict Class* object, then return the indice of the specified indicator constraint as key and return *tupledict Class* object consisting of the IIS status of indicator constraints.

#### Arguments

**genconstrs**

The specified indicator constraint.

#### Example

```
# Retrieve IIS status corresponding to indicator constraint r0 and r1 in model.
indicatorIIS = m.getIndicatorIIS([r0, r1])
# Retrieve IIS status of indicator constraints in tupledict rr.
indicatorIIS = m.getIndicatorIIS(rr)
```

### 19.2.3.72 Model.getAttr()

#### Synopsis

```
getAttr(attrname)
```

#### Description

Get the value of an attribute of model. Return a constant.

#### Arguments

**attrname**

The specified attribute name. The full list of available attributes can be found in *Attributes* section.

#### Example

```
# Retrieve the constant terms of objective.
objconst = m.getAttr(COPT.Attr.ObjConst)
```

### 19.2.3.73 Model.getInfo()

#### Synopsis

```
getInfo(infoname, args)
```

#### Description

Retrieve specified information.

If parameter **args** is *Var Class* object or *Constraint Class* object, then return info of the specified variable or constraint.

If parameter **args** is list or *VarArray Class* object or *ConstrArray Class* object, then return a list consisting of the specified variables or constraints.



If parameter `args` is dictionary or *tupledict Class* object, then return the indice of the specified variables or constraints as key and return *tupledict Class* object consisting of info corresponding to the specified variables or constraints as value.

#### Arguments

`infoname`

The specified information name. The full list of available attributes can be found in ref:*chapInfo* section.

`args`

Variables and constraints to get information.

#### Example

```
# Retrieve lower bound information of all linear constraints in model.
lb = m.getInfo(COPT.Info.LB, m.getConstrs())
# Retrieve value information of variables x and y.
sol = m.getInfo(COPT.Info.Value, [x, y])
# Retrieve the dual variable value corresponding to linear constraint in tupledict object
↳ shipconstr.
dual = m.getInfo(COPT.Info.Dual, shipconstr)
```

### 19.2.3.74 Model.getParam()

#### Synopsis

`getParam(paramname)`

#### Description

Retrive the current value of the specified parameter. Return a constant.

#### Arguments

`paramname`

The name of the parameter to get access to. The full list of available attributes can be found in *Parameters* section.

#### Example

```
# Retrieve current value of time limit.
timelimit = m.getParam(COPT.Param.TimeLimit)
```

### 19.2.3.75 Model.getParamInfo()

#### Synopsis

`getParamInfo(paramname)`

#### Description

Retrieve information of the specified optimization parameter. Return a tuple object, consisiting of param name, current value, default value, minimum value, maximum value.

#### Arguments

`paramname`

Name of the specified parameter. The full list of available values can be found in *Parameters* section.

#### Example

```
# Retrieve information of time limit.
pname, pcur, pdef, pmin, pmax = m.getParamInfo(COPT.Param.TimeLimit)
```

### 19.2.3.76 Model.setBasis()

#### Synopsis

```
setBasis(varbasis, constrbasis)
```

#### Description

Set basis status for all variables and linear constraints in LP. The parameters **varbasis** and **constrbasis** are list objects whose number of elements is the total number of variables or linear constraints.

#### Arguments

**varbasis**

The basis status of variables.

**constrbasis**

The basis status of constraints.

#### Example

```
# Set basis status for all variables and linear constraints in the model.
m.setBasis(varbasis, constrbasis)
```

### 19.2.3.77 Model.setSlackBasis()

#### Synopsis

```
setSlackBasis()
```

#### Description

Set LP basis to be slack.

#### Example

```
# Set LP basis to be slack.
m.setSlackBasis()
```

### 19.2.3.78 Model.setVarType()

#### Synopsis

```
setVarType(vars, vartypes)
```

#### Description

Set the type of specific variable.

If parameter **vars** is *Var Class* object, then parameter **vartypes** is Variable types constant;

If parameter **vars** is dictionary or *tupledict Class* object, then parameter **vartypes** can be Variable types constart, dictionary or *tupledict Class* object;

If parameter **vars** is list or *VarArray Class* object, then parameter **vartypes** can be Variable types constart or list object.

#### Arguments

**vars**

The specified variable.

**vartypes**

Type of the specified variable.

#### Example

```
# Set variable x as integer variable.
m.setVarType(x, COPT.INTEGER)
# Set variables x and y as binary variables.
m.setVarType([x, y], COPT.BINARY)
# Set the variables in tupledict object xdict as continuous variables.
m.setVarType(xdict, COPT.CONTINUOUS)
```

### 19.2.3.79 Model.setMipStart()

#### Synopsis

`setMipStart(vars, startvals)`

#### Description

Set initial value for specified variables, valid only for interger programming.

If parameter **vars** is *Var Class* object, then parameter **startvals** is constant; If parameter **vars** is dictionary or *tupledict Class* object, then parameter **startvals** can be constant, dictionary or *tupledict Class* object; If parameter **vars** is list or *VarArray Class* object, then parameter **startvals** can be constant or list object.

**Notice:** You may want to call this method several times to input the MIP start. Please call `loadMipStart()` once when the input is done.

#### Arguments

**vars**

The specified variable.

**startvals**

Initial value of the specified variable

#### Example

```
# Set initial value of x as 1.
m.setMipStart(x, 1)
# Set initial value of x, y as 2, 3.
m.setMipStart([x, y], [2, 3])
# Set initial value of all variables in tupledict xdict as 1.
m.setMipStart(xdict, 1)

# Load initial solution to model
m.loadMipStart()
```

### 19.2.3.80 Model.loadMipStart()

#### Synopsis

```
loadMipStart()
```

#### Description

Load the currently specified initial values into model.

**Notice:** After calling this method, the previously initial values will be cleared, and users can continue to set initial values for specified variables.

### 19.2.3.81 Model.setInfo()

#### Synopsis

```
setInfo(infename, args, newvals)
```

#### Description

Set new information value for specific variables or constraints.

If parameter `args` is *Var Class* object or *Constraint Class* object, then parameter `newvals` is constant; If parameter `args` is dictionary or *tupledict Class* object, then parameter `newvals` can be constant, dictionary or *tupledict Class* object; If parameter `args` is list, *VarArray Class* object or *ConstrArray Class* object, then parameter `newvals` can be constant or list.

#### Arguments

`infename`

The specified information name. The full list of available names can be found in *Information* section.

`args`

The specified variables of constraints.

`newvals`

Value of the specified information.

#### Example

```

m.setInfo(COPT.Info.LB, [x, y], [1.0, 2.0])

# Set the upperbound of variable x as 1.0
m.setInfo(COPT.Info.UB, x, 1.0)
# Set the lowerbound of variables x and y as 1.0, 2.0, respectively.
m.setInfo(COPT.Info.LB, [x, y], [1.0, 2.0])
# Set the objective of all variables in tupledict xdict as 0.
m.setInfo(COPT.Info.OBJ, xdict, 0.0)

```

#### 19.2.3.82 Model.setParam()

##### Synopsis

```
setParam(paramname, newval)
```

##### Description

Set the value of a parameter to a specific value.

##### Arguments

**paramname**

The name of parameter to be set. The list of available names can be found in *Parameters* section.

**newval**

New value of parameter.

##### Example

```
# Set time limit of solving to 1 hour.  
m.setParam(COPT.Param.TimeLimit, 3600)
```

#### 19.2.3.83 Model.resetParam()

##### Synopsis

```
resetParam()
```

##### Description

Reset all parameters to their default values.

##### Example

```
# Reset all parameters to their default values.  
m.resetParam()
```

#### 19.2.3.84 Model.read()

##### Synopsis

```
read(filename)
```

##### Description

Determine the type of data by the file suffix and read it into a model.

Currently, it supports MPS files (suffix `'.mps'` or `'.mps.gz'`), LP files (suffix `'.lp'` or `'.lp.gz'`), SDPA files (suffix `'.dat-s'` or `'.dat-s.gz'`), CBF files (suffix `'.cbf'` or `'.cbf.gz'`), COPT binary format files (suffix `'.bin'`), basis files (suffix `'.bas'`), result files (suffix `'.sol'`), start files (suffix `'.mst'`), and parameter files (suffix `'.par'`).

##### Arguments

**filename**

Name of the file to be read.

##### Example

```

# Read MPS format model file
m.read('test.mps.gz')
# Read LP format model file
m.read('test.lp.gz')
# Read COPT binary format model file
m.read('test.bin')
# Read basis file
m.read('testlp.bas')
# Read solution file
m.read('testmip.sol')
# Read start file
m.read('testmip.mst')
# Read paramter file
m.read('test.par')

```

### 19.2.3.85 Model.readMps()

#### Synopsis

```
readMps(filename)
```

#### Description

Read MPS file to model.

#### Arguments

filename

The name of the MPS file to be read.

#### Example

```

# Read file "test.mps.gz" according to mps file format
m.readMps('test.mps.gz')
# Read file "test.lp.gz" according mps file format
m.readMps('test.lp.gz')

```

### 19.2.3.86 Model.readLp()

#### Synopsis

```
readLp(filename)
```

#### Description

Read a file to model according to LP file format.

#### Arguments

filename

Name of the LP file to be read.

#### Example

```

# Read file"test.mps.gz" according to LP file format
m.readLp('test.mps.gz')
# Read file"test.lp.gz" according to LP file format
m.readLp('test.lp.gz')

```

#### 19.2.3.87 Model.readSdpa()

##### Synopsis

```
readSdpa(filename)
```

##### Description

Read a file to model according to SDPA file format.

##### Arguments

filename

Name of the SDPA file to be read.

##### Example

```
# Read file "test.dat-s" according to SDPA file format
m.readSdpa('test.dat-s')
```

#### 19.2.3.88 Model.readCbf()

##### Synopsis

```
readCbf(filename)
```

##### Description

Read a file to model according to CBF file format.

##### Arguments

filename

Name of the CBF file to be read.

##### Example

```
# Read file "test.cbf" according to CBF file format
m.readCbf('test.cbf')
```

#### 19.2.3.89 Model.readBin()

##### Synopsis

```
readBin(filename)
```

##### Description

Read COPT binary format file to model.

##### Arguments

filename

The name of the COPT binary format file to be read.

##### Example

```
# Read file "test.bin" according COPT binary file format
m.readBin('test.bin')
```

### 19.2.3.90 Model.readSol()

#### Synopsis

```
readSol(filename)
```

#### Description

Read a file to model according to solution file format.

**Notice:** The default solution value is 0, i.e. a partial solution will be automatically filled in with zeros. If read successfully, then the values read can be act as initial solution for integer programming.

#### Arguments

filename

Name of file to be read.

#### Example

```
# Read file "testmip.sol" according to solution file format.
m.readSol('testmip.sol')
# Read file testmip.txt" according to solution file format.
m.readSol('testmip.txt')
```

### 19.2.3.91 Model.readBasis()

#### Synopsis

```
readBasis(filename)
```

#### Description

Read basis status of variables and linear constraints to model accoring to basis solution format, valid only for linear programming.

#### Arguments

filename

The name of the basis file to be read.

#### Example

```
# Read file "testmip.bas" to basis solution format
m.readBasis('testmip.bas')
# Read file "testmip.txt" to basis solution format
m.readBasis('testmip.txt')
```

### 19.2.3.92 Model.readMst()

#### Synopsis

```
readMst(filename)
```

#### Description

Read initial solution data to model according to initial solution file format.

**Notice:** If read successfully, the read value will be act as initial solution for integer programming model. Variable values may not be specified completely, if the value of variable is specified for multiple times, the last specified value is used.

#### Arguments



filename

Name of the file to be read.

#### Example

```
# Read file "testmip.mst" according to initial solution file format.
m.readMst('testmip.mst')
# Read file "testmip.txt" according to initial solution file format.
m.readMst('testmip.txt')
```

### 19.2.3.93 Model.readParam()

#### Synopsis

readParam(filename)

#### Description

Read optimization parameters to model according to parameter file format.

**Notice:** If any optimization parameter is specified multiple times, the last specified value is used.

#### Arguments

filename

The name of the parameter file to be read.

#### Example

```
# Read file "testmip.par" according to parameter file format.
m.readParam('testmip.par')
# Read file "testmip.txt" according to parameter file format.
m.readParam('testmip.txt')
```

### 19.2.3.94 Model.readTune()

#### Synopsis

readTune(filename)

#### Description

Read the tuning parameters and combine them into the model according to the tuning file format.

#### Arguments

filename

The name of the file to be read.

#### Example

### 19.2.3.95 Model.write()

#### Synopsis

```
write(filename)
```

#### Description

Currently, COPT supports writing of MPS files (suffix `'.mps'`), LP files (suffix `'.lp'`), CBF files (suffix `'.cbf'`), COPT binary format files (suffix `'.bin'`), basis files (suffix `'.bas'`), LP solution files (suffix `'.sol'`), initial solution files (suffix `'.mst'`), and parameter files (suffix `'.par'`).

#### Arguments

`filename`

The file name to be written.

#### Example

```

# Write MPS file
m.write('test.mps')
# Write LP file
m.write('test.lp')
# Write COPT binary format file
m.write('test.bin')
# Write basis file
m.write('testlp.bas')
# Write solution file
m.write('testmip.sol')
# Write initial solution file
m.write('testmip.mst')
# Write parameter file
m.write('test.par')

```

### 19.2.3.96 Model.writeMps()

#### Synopsis

```
writeMps(filename)
```

#### Description

Write current model into an MPS file.

#### Arguments

`filename`

The name of the MPS file to be written.

#### Example

```

# Write MPS model file "test.mps"
m.writeMps('test.mps')

```

### 19.2.3.97 Model.writeMpsStr()

#### Synopsis

```
writeMpsStr()
```

#### Description

Write current model into a buffer as MPS format.

#### Example

```
# Write model to buffer 'buff' and print model
buff = m.writeMpsStr()
print(buff.getData())
```

### 19.2.3.98 Model.writeLp()

#### Synopsis

```
writeLp(filename)
```

#### Description

Write current optimization model to a LP file.

#### Arguments

filename

The name of the LP file to be written.

#### Example

```
# Write LP model file "test.lp"
m.writeLp('test.lp')
```

### 19.2.3.99 Model.writeCbf()

#### Synopsis

```
writeCbf(filename)
```

#### Description

Write current optimization model to a CBF file.

#### Arguments

filename

The name of the CBF file to be written.

#### Example

```
# Write CBF model file "test.cbf"
m.writeCbf('test.cbf')
```

#### 19.2.3.100 Model.writeBin()

##### Synopsis

```
writeBin(filename)
```

##### Description

Write current model into an COPT binary format file.

##### Arguments

filename

The name of the COPT binary format file to be written.

##### Example

```
# Write COPT binary format model file "test.bin"
m.writeBin('test.bin')
```

#### 19.2.3.101 Model.writeIIS()

##### Synopsis

```
writeIIS(filename)
```

##### Description

Write current irreducible infeasible system into an IIS file.

##### Arguments

filename

The name of the IIS file to be written.

##### Example

```
# Write IIS file "test.iis"
m.writeIIS('test.iis')
```

#### 19.2.3.102 Model.writeRelax()

##### Synopsis

```
writeRelax(filename)
```

##### Description

Write the feasibility relaxation model into a Relax file.

##### Arguments

filename

The name of the Relax file to be written.

##### Example

```
# Write Relax file "test.relax"
m.writeRelax('test.relax')
```

#### 19.2.3.103 Model.writeSol()

##### Synopsis

```
writeSol(filename)
```

##### Description

Output the model solution to a solution file.

##### Arguments

filename

The name of the solution file to be written.

##### Example

```
# Write solution file "test.sol"
m.writeSol('test.sol')
```

#### 19.2.3.104 Model.writePoolSol()

##### Synopsis

```
writePoolSol(isol, filename)
```

##### Description

Output selected pool solution to a solution file.

##### Arguments

isol

Index of pool solution.

filename

The name of the solution file to be written.

##### Example

```
# Write 1-th pool solution to solution file "poolsol_1.sol"
m.writePoolSol('poolsol_1.sol')
```

#### 19.2.3.105 Model.writeBasis()

##### Synopsis

```
writeBasis(filename)
```

##### Description

Write the LP basic solution to a basis file.

##### Arguments

filename

The name of the basis file to be written.

##### Example

```
# Write the basis file "testlp.bas"
m.writeBasis('testlp.bas')
```

**19.2.3.106 Model.writeMst()****Synopsis**

```
writeMst(filename)
```

**Description** For integer programming models, write the best integer solution currently to the initial solution file. If there are no integer solutions, then the first set of initial solution stored in model is output.

**Arguments**

filename

Name of the file to be written.

**Example**

```
# Output initial solution file "testmip.mst"
m.writeMst('testmip.mst')
```

**19.2.3.107 Model.writeParam()****Synopsis**

```
writeParam(filename)
```

**Description**

Output modified parameters to a parameter file.

**Arguments**

filename

The name of the parameter file to be written.

**Example**

```
# Output parameter file "testmip.par"
m.writeParam('testmip.par')
```

**19.2.3.108 Model.writeTuneParam()****Synopsis**

```
writeTuneParam(idx, filename)
```

**Description**

Output the parameter tuning result of the specified number to the parameter file.

**Arguments**

idx

Parameter tuning result number.

filename

The name of the parameter file to be output.

**Example**

**19.2.3.109 Model.setLogFile()****Synopsis**

```
setLogFile(logfile)
```

**Description**

Set the optimizer log file.

**Arguments**

logfile

The log file.

**Example**

```
# Set the log file as "copt.log"
m.setLogFile('copt.log')
```

**19.2.3.110 Model.setLogCallback()****Synopsis**

```
setLogCallback(logcb)
```

**Description**

Set the call back function of log.

**Arguments**

logcb

Call back function of log.

**Example**

```
# Set the call back function of log as a python function 'logcbfun'.
m.setLogCallback(logcbfun)
```

**19.2.3.111 Model.solve()****Synopsis**

```
solve()
```

**Description**

Solve an optimization problem.

**Example**

```
# Solve the model.
m.solve()
```

**19.2.3.112 Model.solveLP()****Synopsis**

```
solveLP()
```

**Description**

Solve LP model. If the model is integer programming, then the model will be solved as LP.

**Example**

```
# Solve a model calling LP solver.
m.solveLP()
```

**19.2.3.113 Model.computeIIS()****Synopsis**

```
computeIIS()
```

**Description**

Compute IIS for infeasible model.

**Example**

```
# Compute IIS for infeasible model.
m.computeIIS()
```

**19.2.3.114 Model.feasRelax()****Synopsis**

```
feasRelax(vars, lbpen, ubpen, constra, rhspen, uppen=None)
```

**Description**

Compute the feasibility relaxation of an infeasible model

**Arguments**

**vars**

Variables to relax.

**lbpen**

The penalty relating to lower bounds. If **None**, no lower bound violations are allowed. If a variable's penalty is **COPT.INFINITY**, lower bound violation is not allowed on it.

**ubpen**

The penalty relating to upper bounds. If **None**, no upper bound violations are allowed. If a variable's penalty is **COPT.INFINITY**, upper bound violation is not allowed on it.

**constra**

Constraints to relax.

**rhspen**



The penalty relating to constraints. If `None`, no constraint violations are allowed. If a constraint's penalty is `COPT.INFINITY`, it's not allowed to be violated.

`ubpen`

The penalty relating to the upper bound of bilateral constraints. If `None`, specified by `rhspen`; If a constraint's penalty is `COPT.INFINITY`, constraint upper bound violation is not allowed on it.

#### Example

```
# compute feasibility relaxation for model m
m.feasRelax(vars, lbpen, ubpen, constra, rhspen)
```

### 19.2.3.115 Model.feasRelaxS()

#### Synopsis

```
feasRelaxS(vrelax, crelax)
```

#### Description

Compute the feasibility relaxation of an infeasible model

#### Arguments

`vrelax`

Whether to relax variables.

`crelax`

Whether to relax constraints.

#### Example

```
# Compute the feasibility relaxation of model m
m.feasRelaxS(True, True)
```

### 19.2.3.116 Model.tune()

#### Synopsis

```
tune()
```

#### Description

Parameter tuning of the model.

#### Example

### 19.2.3.117 Model.loadTuneParam()

#### Synopsis

```
loadTuneParam(idx)
```

#### Description

Load the parameter tuning results of the specified number into the model.

#### Example

**19.2.3.118 Model.interrupt()****Synopsis**

```
interrupt()
```

**Description**

Interrupt solving process of current problem.

**Example**

```
# Interrupt the solving process.
m.interrupt()
```

**19.2.3.119 Model.remove()****Synopsis**

```
remove(args)
```

**Description**

Remove variables or constraints from a model.

To remove variable, then parameter **args** can be *Var Class* object, *VarArray Class* object, list, dictionary or *tupledict Class* object.

To remove linear constraint, then parameter **args** can be *Constraint Class* object, *ConstrArray Class* object, list, dictionary or *tupledict Class* object.

To remove SOS constraint, then parameter **args** can be *SOS Class* object, *SOSArray Class* object, list, dictionary or *tupledict Class* object.

To remove Second-Order-Cone constraints, then parameter **args** can be *Cone Class* object, *ConeArray Class* object, list, dictionary or *tupledict Class* object.

To remove quadratic constraints, then parameter **args** can be *QConstraint Class* object, *QConstrArray Class* object, list, dictionary or *tupledict Class* object.

To remove positive semi-definite constraints, then parameter **args** can be *PsdConstraint Class* object, *PsdConstrArray Class* object, list, dictionary or *tupledict Class* object.

To remove Indicator constraint, then parameter **args** can be *GenConstr Class* object, *GenConstrArray Class* object, list, dictionary or *tupledict Class* object.

**Arguments**

```
args
```

Variables or constraints to be removed.

**Example**

```
# Remove linear constraint conx
m.remove(conx)
# Remove variables x and y
m.remove([x, y])
```

#### 19.2.3.120 Model.reset()

##### Synopsis

```
reset(clearall=0)
```

**Description** Reset the model to an unsolved state, which means resetting previously solution information. If parameter `clearall` is 1, the initial solution information is also resetted.

##### Arguments

`clearall`

Whether to reset initial solution information. Optional, 0 by default, which means not resetting initial solution information.

##### Example

```
# Reset the solution information in model.
m.reset()
```

#### 19.2.3.121 Model.clear()

##### Synopsis

```
clear()
```

##### Description

Clear the model.

##### Example

```
# Clear the contents in model.
m.clear()
```

#### 19.2.3.122 Model.clone()

##### Synopsis

```
clone()
```

##### Description

Create a deep copy of an existing model. Return a *Model Class* object.

##### Example

```
# Create a deep copy of model
mcopy = m.clone()
```

### 19.2.4 Var Class

For easy access to information of variables, Var object provides methods such as `Var.LB`. The full list of information can be found in the *Information* section. For convenience, information can be accessed by names in original case or lowercase.

In addition, you can also access the value of the variable through `Var.x`, the variable type through `Var.vtype`, the name of the variable through `Var.name`, the Reduced cost value of the variable in LP through `Var.rc`, the basis status through `Var.basis`, and the index of the variable in the coefficient matrix through `Var.index` the Reduced cost value of the variable in LP through `Var.rc`, the basis status through `Var.basis`, and the index of the variable in the coefficient matrix through `Var.index`.

For the model-related information of the variables, as well as the variable type and name, the user can set the corresponding information value in the form of "Var.LB = 0.0".

Var object contains related operations of COPT variables and provides the following methods:

#### 19.2.4.1 Var.getType()

##### Synopsis

```
getType()
```

##### Description

Retrieve the type of variable.

##### Example

```
# Retrieve the type of variable v
vtype = v.getType()
```

#### 19.2.4.2 Var.getName()

##### Synopsis

```
getName()
```

##### Description

Retrieve the name of variable.

##### Example

```
# Retrieve the name of variable v
varname = v.getName()
```

#### 19.2.4.3 Var.getBasis()

##### Synopsis

```
getBasis()
```

##### Description

Retrieve the basis status of variable.

##### Example

```
# Retrieve the basis status of variable v
varbasis = v.getBasis()
```

#### 19.2.4.4 Var.getLowerIIS()

##### Synopsis

```
getLowerIIS()
```

##### Description

Retrieve the IIS status of lower bound of variable.

##### Example

```
# Retrieve the IIS status of lower bound of variable v
lowerIIS = v.getLowerIIS()
```

#### 19.2.4.5 Var.getUpperIIS()

##### Synopsis

getUpperIIS()

##### Description

Retrieve the IIS status of upper bound of variable.

##### Example

```
# Retrieve the IIS status of upper bound of variable v
upperIIS = v.getUpperIIS()
```

#### 19.2.4.6 Var.getIdx()

##### Synopsis

getIdx()

##### Description

Retrieve the subscript of the variable in the coefficient matrix.

##### Example

```
# Retrieve the subscript of variable v
vindex = v.getIdx()
```

#### 19.2.4.7 Var.setType()

##### Synopsis

setType(newtype)

##### Description

Set the type of variable.

##### Arguments

newtype

The type of variable to be set. Please refer to Variable types section for possible values.

##### Example

```
# Set the type of variable v
v.setType(COPT.BINARY)
```

#### 19.2.4.8 Var.setName()

##### Synopsis

setName(newname)

##### Description

Set the name of variable.

##### Arguments

newname

The name of variable to be set.

#### Example

```
# Set the name of variable v
v.setName(COPT.BINARY)
```

#### 19.2.4.9 Var.getInfo()

##### Synopsis

```
getInfo(infoname)
```

##### Description

Retrieve specified information. Return a constant.

##### Arguments

`infoname`

The name of the information. Please refer to *Information* for possible values.

#### Example

```
# Get lowerbound of variable x
x.getInfo(COPT.Info.LB)
```

#### 19.2.4.10 Var.setInfo()

##### Synopsis

```
setInfo(infoname, newval)
```

##### Description

Set new information value for a variable.

##### Arguments

`infoname`

The name of the information to be set. Please refer to *Information* section for possible values.

`newval`

New information value to set.

#### Example

```
# Set the lower bound of variable x
x.setInfo(COPT.Info.LB, 1.0)
```

#### 19.2.4.11 Var.remove()

##### Synopsis

```
remove()
```

##### Description

Delete the variable from model.

##### Example

```
# Delete variable 'x'
x.remove()
```

### 19.2.5 VarArray Class

To facilitate users to operate on multiple *Var Class* objects, the Python interface of COPT provides *VarArray* object with the following methods:

#### 19.2.5.1 VarArray()

##### Synopsis

```
VarArray(vars=None)
```

##### Description

Create a *VarArray Class* object.

If parameter *vars* is *None*, then create an empty *VarArray Class* object, otherwise initialize the new created *VarArray Class* object based on *vars*.

##### Arguments

*vars*

Variables to be added. Optional, *None* by default. *vars* can be *Var Class* object, *VarArray Class* object, list, dictionary or *tupledict Class* object.

##### Example

```
# Create an empty VarArray object
vararr = VarArray()
# Create an empty VarArray object and initialize variables x, y.
vararr = VarArray([x, y])
```

#### 19.2.5.2 VarArray.pushBack()

##### Synopsis

```
pushBack(vars)
```

##### Description

Add single or multiple *Var Class* objects.

##### Arguments

*vars*

Variables to be applied. *vars* can be *Var Class* object, *VarArray Class* object, list, dictionary or *tupledict Class* object.

##### Example

```
# Add variable x to vararr
vararr.pushBack(x)
# Add variables x and y to vararr
vararr.pushBack([x, y])
```

### 19.2.5.3 VarArray.getVar()

#### Synopsis

```
getVar(idx)
```

#### Description

Retrieve a variable from an index in a *VarArray Class* object. Return a *Var Class* object.

#### Arguments

idx

Subscript of the specified variable in *VarArray Class* object, starting with 0.

#### Example

```
# Get the variable with subscript of 1 in vararr
vararr.getVar(1)
```

### 19.2.5.4 VarArray.getAll()

#### Synopsis

```
getAll()
```

#### Description

Retrieve all variables in *VarArray Class* object. Returns a list object.

#### Example

```
# Get all variables in 'vararr'
varall = vararr.getAll()
```

### 19.2.5.5 VarArray.getSize()

#### Synopsis

```
getSize()
```

#### Description

Retrieve the number of variables in *VarArray Class* object.

#### Example

```
# Retrieve the number of variables in vararr.
arrsize = vararr.getSize()
```



### 19.2.6 PsdVar Class

PsdVar object contains related operations of COPT positive semi-definite variables and provides the following methods:

#### 19.2.6.1 PsdVar.getName()

##### Synopsis

```
getName()
```

##### Description

Retrieve the name of positive semi-definite variable.

##### Example

```
# Retrieve the name of variable v
varname = v.getName()
```

#### 19.2.6.2 PsdVar.getIdx()

##### Synopsis

```
getIdx()
```

##### Description

Retrieve the subscript of the variable in the model.

##### Example

```
# Retrieve the subscript of variable v
vindex = v.getIdx()
```

#### 19.2.6.3 PsdVar.getDim()

##### Synopsis

```
getDim()
```

##### Description

Retrieve the dimension of positive semi-definite variable.

##### Example

```
# Retrieve the dimension of variable "v"
vdim = v.getDim()
```

#### 19.2.6.4 PsdVar.getLen()

##### Synopsis

```
getLen()
```

##### Description

Retrieve the length of the expanded positive semi-definite variable.

##### Example

```
# Retrieve the length of the expanded positive semi-definite variable "v"
vlen = v.getLen()
```

#### 19.2.6.5 PsdVar.setName()

##### Synopsis

```
setName(newname)
```

##### Description

Set the name of positive semi-definite variable.

##### Arguments

`newname`

The name of positive semi-definite variable to be set.

##### Example

```
# Set the name of variable v
v.setName('v')
```

#### 19.2.6.6 PsdVar.getInfo()

##### Synopsis

```
getInfo(infename)
```

##### Description

Retrieve specified information of positive semi-definite variable. Return a list.

##### Arguments

`infename`

The name of the information. Please refer to *Information* for possible values.

##### Example

```
# Get solution values of positive semi-definite variable x
sol = x.getInfo(COPT.Info.Value)
```

#### 19.2.6.7 PsdVar.remove()

##### Synopsis

```
remove()
```

##### Description

Delete the positive semi-definite variable from model.

##### Example

```
# Delete variable 'x'
x.remove()
```

## 19.2.7 PsdVarArray Class

To facilitate users to operate on multiple *PsdVar Class* objects, the Python interface of COPT provides PsdVarArray object with the following methods:

### 19.2.7.1 PsdVarArray()

#### Synopsis

```
PsdVarArray(vars=None)
```

#### Description

Create a *PsdVarArray Class* object.

If parameter `vars` is `None`, then create an empty *PsdVarArray Class* object, otherwise initialize the new created *PsdVarArray Class* object based on `vars`.

#### Arguments

`vars`

Positive semi-definite variables to be added. Optional, `None` by default. `vars` can be *PsdVar Class* object, *PsdVarArray Class* object, list, dictionary or *tupledict Class* object.

#### Example

```
# Create an empty PsdVarArray object
vararr = PsdVarArray()
# Create a PsdVarArray object containing positive semi-definite variables x, y.
vararr = PsdVarArray([x, y])
```

### 19.2.7.2 PsdVarArray.pushBack()

#### Synopsis

```
pushBack(var)
```

#### Description

Add single or multiple *PsdVar Class* objects.

#### Arguments

`var`

Postive semi-definite variables to be applied. `vars` can be *PsdVar Class* object, *PsdVarArray Class* object, list, dictionary or *tupledict Class* object.

#### Example

```
# Add variable x to vararr
vararr.pushBack(x)
# Add variables x and y to vararr
vararr.pushBack([x, y])
```

### 19.2.7.3 `PsdVarArray.getPsdVar()`

#### Synopsis

```
getPsdVar(idx)
```

#### Description

Retrieve a positive semi-definite variable from an index in a *PsdVarArray Class* object. Return a *PsdVar Class* object.

#### Arguments

`idx`

Subscript of the specified positive semi-definite variable in *PsdVarArray Class* object, starting with 0.

#### Example

```
# Get the positive semi-definite variable with subscript of 1 in vararr
var = vararr.getPsdVar(1)
```

### 19.2.7.4 `PsdVarArray.getSize()`

#### Synopsis

```
getSize()
```

#### Description

Retrieve the number of positive semi-definite variables in *PsdVarArray Class* object.

#### Example

```
# Retrieve the number of variables in vararr.
arrsize = vararr.getSize()
```

## 19.2.8 SymMatrix Class

SymMatrix object contains related operations of COPT symmetric matrices and provides the following methods:

### 19.2.8.1 `SymMatrix.getIdx()`

#### Synopsis

```
getIdx()
```

#### Description

Retrieve the subscript of the symmetric matrix in the model.

#### Example

```
# Retrieve the subscript of symmetric matrix mat
matidx = mat.getIdx()
```

### 19.2.8.2 SymMatrix.getDim()

#### Synopsis

```
getDim()
```

#### Description

Retrieve the dimension of symmetric matrix.

#### Example

```
# Retrieve the dimension of symmetric matrix "mat".
matdim = mat.getDim()
```

## 19.2.9 SymMatrixArray Class

To facilitate users to operate on multiple *SymMatrix Class* objects, the Python interface of COPT provides SymMatrixArray object with the following methods:

### 19.2.9.1 SymMatrixArray()

#### Synopsis

```
SymMatrixArray(mats=None)
```

#### Description

Create a *SymMatrixArray Class* object.

If parameter `mats` is `None`, then create an empty *SymMatrixArray Class* object, otherwise initialize the new created *SymMatrixArray Class* object based on `mats`.

#### Arguments

`mats`

`mats` can be *SymMatrix Class* object, *SymMatrixArray Class* object, list, dictionary or *tupledict Class* object.

#### Example

```
# Create an empty SymMatrixArray object
matarr = SymMatrixArray()
# Create a SymMatrixArray object containing matx, maty.
matarr = SymMatrixArray([matx, maty])
```

### 19.2.9.2 SymMatrixArray.pushBack()

#### Synopsis

```
pushBack(mat)
```

#### Description

Add single or multiple *SymMatrix Class* objects.

#### Arguments

`mat`

Symmetric matrices to be applied. `mat` can be *SymMatrix Class* object, *SymMatrixArray Class* object, list, dictionary or *tupledict Class* object.

#### Example

```
# Add symmetric matrix matx to matarr
matarr.pushBack(matx)
# Add symmetric matrices matx and maty to matarr
matarr.pushBack([matx, maty])
```

### 19.2.9.3 SymMatrixArray.getMatrix()

#### Synopsis

```
getMatrix(idx)
```

#### Description

Retrieve a symmetric matrix from an index in a *SymMatrixArray Class* object.  
Return a *SymMatrix Class* object.

#### Arguments

idx

Subscript of the specified symmetric matrix in *SymMatrixArray Class* object, starting with 0.

#### Example

```
# Get the symmetric matrix with subscript of 1 in matarr
mat = matarr.getMatrix(1)
```

### 19.2.9.4 SymMatrixArray.getSize()

#### Synopsis

```
getSize()
```

#### Description

Retrieve the number of symmetric matrices in *SymMatrixArray Class* object.

#### Example

```
# Retrieve the number of symmetric matrices in matarr.
arrsize = matarr.getSize()
```

## 19.2.10 Constraint Class

For easy access to information of constraints, Constraint class provides methods such as **Constraint.LB**. The supported information can be found in *Information* section. For convenience, information can be queried by names in original case or lowercase.

In addition, you can access the name of the constraint through **Constraint.name**, the dual value of the constraint in LP through **Constraint.pi**, the basis status of the constraint through **Constraint.basis**, and the index in the coefficient matrix through **Constraint.index**.

For the model-related information and constraint name, the user can also set the corresponding information in the form of "Constraint.lb = -100".

Constraint object contains related operations of COPT constraints and provides the following methods:

#### 19.2.10.1 Constraint.getName()

##### Synopsis

getName()

##### Description

Retrieve the name of linear constraint.

##### Example

```
# Retrieve the name of linear constraint 'con'.
conname = con.getName()
```

#### 19.2.10.2 Constraint.getBasis()

##### Synopsis

getBasis()

##### Description

Retrieve the basis status of linear constraint.

##### Example

```
# Retrieve the basis status of linear constraint 'con'.
conbasis = con.getBasis()
```

#### 19.2.10.3 Constraint.getLowerIIS()

##### Synopsis

getLowerIIS()

##### Description

Retrieve the IIS status of lower bound of linear constraint.

##### Example

```
# Retrieve the IIS status of lower bound of linear constraint 'con'.
lowerIIS = con.getLowerIIS()
```

#### 19.2.10.4 Constraint.getUpperIIS()

##### Synopsis

getUpperIIS()

##### Description

Retrieve the IIS status of upper bound of linear constraint.

##### Example

```
# Retrieve the IIS status of upper bound of linear constraint 'con'.
upperIIS = con.getUpperIIS()
```

#### 19.2.10.5 Constraint.getIdx()

##### Synopsis

getIdx()

##### Description

Retrieve the subscript of linear constraint in coefficient matrix.

##### Example

```
# Retrieve the subscript of linear constraint con.
conidx = con.getIdx()
```

#### 19.2.10.6 Constraint.setName()

##### Synopsis

setName(newname)

##### Description

Set the name of linear constraint.

##### Arguments

newname

The name of constraint to be set.

##### Example

```
# Set the name of linear constraint 'con'.
con.setName('con')
```

#### 19.2.10.7 Constraint.getInfo()

##### Synopsis

getInfo(infoname)

##### Description

Retrieve specified information. Return a constant.

##### Arguments

infoname

Name of the information to be obtained. Please refer to *Information* section for possible values.

##### Example

```
# Get the lower bound of linear constraint con
conlb = con.getInfo(COPT.Info.LB)
```



#### 19.2.10.8 Constraint.setInfo()

##### Synopsis

```
setInfo(infoname, newval)
```

##### Description

Set new information value to the specified constraint.

##### Arguments

`infoname`

The name of the information to be set. Please refer to *Information* section for possible values.

`newval`

New information value to be set.

##### Example

```
# Set the lower bound of linear constraint con
con.setInfo(COPT.Info.LB, 1.0)
```

#### 19.2.10.9 Constraint.remove()

##### Synopsis

```
remove()
```

##### Description

Delete the linear constraint from model.

##### Example

```
# Delete the linear constraint 'conx'
conx.remove()
```

#### 19.2.11 ConstrArray Class

To facilitate users to operate on multiple *Constraint Class* objects, the Python interface of COPT provides ConstrArray class with the following methods:

##### 19.2.11.1 ConstrArray()

##### Synopsis

```
ConstrArray(constrs=None)
```

##### Description

Create a *ConstrArray Class* object.

If parameter `constrs` is `None`, then create an empty *ConstrArray Class* object, otherwise initialize the newly created *ConstrArray Class* object with parameter `constrs`

##### Arguments

`constrs`

Linear constraints to be added. `None` by default.

`constrs` can be *Constraint Class* object, *ConstrArray Class* object, list, dictionary or *tupledict Class* object.

#### Example

```
# Create an empty ConstrArray object
conarr = ConstrArray()
# Create an ConstrArray object initialized with linear constraint conx and cony
conarr = ConstrArray([conx, cony])
```

### 19.2.11.2 ConstrArray.pushBack()

#### Synopsis

```
pushBack(constrs)
```

#### Description

Add single or multiple *Constraint Class* objects.

#### Arguments

`constrs`

Linear constraints to be applied. `constrs` can be *Constraint Class* object, *ConstrArray Class* object, list, dictionary or *tupledict Class* object.

#### Example

```
# Add linear constraint r to conarr
conarr.pushBack(r)
# Add linear constraint r0 and r1 to conarr
conarr.pushBack([r0, r1])
```

### 19.2.11.3 ConstrArray.getConstr()

#### Synopsis

```
getConstr(idx)
```

#### Description

Retrieve the linear constraint according to its subscript in *ConstrArray Class* object. Return a *Constraint Class* object.

#### Arguments

`idx`

Subscript of the desired constraint in *ConstrArray Class* object, starting with 0.

#### Example

```
# Retrieve the linear constraint with subscript 1 in conarr
conarr.getConstr(1)
```

#### 19.2.11.4 ConstrArray.getAll()

##### Synopsis

getAll()

##### Description

Retrieve all linear constraints in *ConstrArray Class* object. Returns a list object.

##### Example

```
# Get all linear constraints in 'conarr'
cons = conarr.getAll()
```

#### 19.2.11.5 ConstrArray.getSize()

##### Synopsis

getSize()

##### Description

Get the number of elements in *ConstrArray Class* object.

##### Example

```
# Get the number of linear constraints in conarr
arrsize = conarr.getSize()
```

### 19.2.12 ConstrBuilder Class

ConstrBuilder object contains operations related to temporary constraints when building constraints, and provides the following methods:

#### 19.2.12.1 ConstrBuilder()

##### Synopsis

ConstrBuilder()

##### Description

Create an empty *ConstrBuilder Class* object

##### Example

```
# Create an empty linear constraint builder
constrbuilder = ConstrBuilder()
```

#### 19.2.12.2 ConstrBuilder.setBuilder()

##### Synopsis

setBuilder(expr, sense)

##### Description

Set expression and constraint type for linear constraint builder.

##### Arguments

expr

The expression to be set, which can be *Var Class* expression or *LinExpr Class* expression.

sense

Sense of constraint. The full list of available types can be found in Constraint type section.

#### Example

```
# Set the expression of linear constraint builder as: x+y-1, and sense of constraint as equal
constrbuilder.setBuilder(x + y - 1, COPT.EQUAL)
```

### 19.2.12.3 ConstrBuilder.getExpr()

#### Synopsis

getExpr()

#### Description

Retrieve the expression of a linear constraint builder object.

#### Example

```
# Retrieve the expression of a linear constraint builder
linexpr = constrbuilder.getExpr()
```

### 19.2.12.4 ConstrBuilder.getSense()

#### Synopsis

getSense()

#### Description

Retrieve the constraint sense of linear constraint builder object.

#### Example

```
# Retrieve the constraint sense of linear constraint builder object.
csense = constrbuilder.getSense()
```

## 19.2.13 ConstrBuilderArray Class

To facilitate users to operate on multiple *ConstrBuilder Class* objects, the Python interface of COPT provides ConstrArray object with the following methods:

### 19.2.13.1 ConstrBuilderArray()

#### Synopsis

ConstrBuilderArray(constrbuilders=None)

#### Description

Create a *ConstrBuilderArray Class* object.

If parameter *constrbuilders* is None, then create an empty *ConstrBuilderArray Class* object, otherwise initialize the newly created *ConstrBuilderArray Class* object by parameter *constrbuilders*.

#### Arguments

`constrbuilders` Linear constraint builder to be added. Optional, `None` by default.  
Can be *ConstrBuilder Class* object, *ConstrBuilderArray Class* object, list, dictionary or *tupledict Class* object.

#### Example

```
# Create an empty ConstrBuilderArray object.
conbuilderarr = ConstrBuilderArray()
# Create a ConstrBuilderArray object and initialize it with builders: conbuilderx and
↳ conbuildery
conbuilderarr = ConstrBuilderArray([conbuilderx, conbuildery])
```

### 19.2.13.2 ConstrBuilderArray.pushBack()

#### Synopsis

`pushBack(constrbuilder)`

#### Description

Add single or multiple *ConstrBuilder Class* objects.

#### Arguments

`constrbuilder`

Builder of linear constraint to be added, which can be *ConstrBuilder Class* object, *ConstrBuilderArray Class* object, list, dictionary or *tupledict Class* object.

#### Example

```
# Add linear constraint builder conbuilderx to conbuilderarr
conbuilderarr.pushBack(conbuilderx)
# Add linear constraint builders conbuilderx and conbuildery to conbuilderarr
conbuilderarr.pushBack([conbuilderx, conbuildery])
```

### 19.2.13.3 ConstrBuilderArray.getBuilder()

#### Synopsis

`getBuilder(idx)`

#### Description

Retrieve a temporary constraint from its index in *ConstrBuilderArray Class* object.  
Return a *ConstrBuilder Class* object.

Retrieve the corresponding builder object according to the subscript of linear constraint builder in *ConstrBuilderArray Class* object.

#### Arguments

`idx`

Subscript of the linear constraint builder in the *ConstrBuilderArray Class* object, starting with 0.

#### Example

```
# Retrieve the builder with subscript 1 in conbuilderarr
conbuilder = conbuilderarr.getBuilder(1)
```

#### 19.2.13.4 ConstrBuilderArray.getSize()

##### Synopsis

```
getSize()
```

##### Description

Get the number of elements in *ConstrBuilderArray Class* object.

##### Example

```
# Get the number of builders in conbuilderarr
arrsize = conbuilderarr.getSize()
```

### 19.2.14 QConstraint Class

For easy access to information of quadratic constraints, QConstraint class provides methods such as `QConstraint.index`. The supported information can be found in [Information](#) section. For convenience, information can be queried by names in original case or lowercase.

In addition, you can access the name of the quadratic constraint through `QConstraint.name`, and the index in the model through `QConstraint.index`.

For the model-related information and constraint name, the user can also set the corresponding information in the form of "`QConstraint.rhs = -100`".

QConstraint object contains related operations of COPT quadratic constraints and provides the following methods:

#### 19.2.14.1 QConstraint.getName()

##### Synopsis

```
getName()
```

##### Description

Retrieve the name of quadratic constraint.

##### Example

```
# Retrieve the name of quadratic constraint 'qcon'
qconname = qcon.getName()
```

#### 19.2.14.2 QConstraint.getRhs()

##### Synopsis

```
getRhs()
```

##### Description

Retrieve the right hand side of quadratic constraint.

##### Example

```
# Retrieve the RHS of quadratic constraint 'qcon'
qconrhs = qcon.getRhs()
```

#### 19.2.14.3 QConstraint.getSense()

##### Synopsis

`getSense()`

##### Description

Retrieve the type of quadratic constraint.

##### Example

```
# Retrieve the type of quadratic constraint 'qcon'
qconsense = qcon.getSense()
```

#### 19.2.14.4 QConstraint.getIdx()

##### Synopsis

`getIdx()`

##### Description

Retrieve the subscript of quadratic constraint.

##### Example

```
# Retrieve the subscript of quadratic constraint 'qcon'
qconidx = qcon.getIdx()
```

#### 19.2.14.5 QConstraint.setName()

##### Synopsis

`setName(newname)`

##### Description

Set the name of quadratic constraint.

##### Arguments

`newname`

The name of quadratic constraint to be set.

##### Example

```
# Set the name of quadratic constraint 'qcon'.
qcon.setName('qcon')
```

#### 19.2.14.6 QConstraint.setRhs()

##### Synopsis

`setRhs(rhs)`

##### Description

Set the right hand side of quadratic constraint.

##### Arguments

`rhs`

The right hand side of quadratic constraint to be set.

**Example**

```
# Set the RHS of quadratic constraint 'qcon' to 0.0
qcon.setRhs(0.0)
```

**19.2.14.7 QConstraint.setSense()****Synopsis**

```
setSense(sense)
```

**Description**

Set the sense of quadratic constraint.

**Arguments**

**sense**

The sense of quadratic constraint to be set.

**Example**

```
# Set the sense of quadratic constraint 'qcon' to <=
qcon.setSense(COPT.LESS_EQUAL)
```

**19.2.14.8 QConstraint.getInfo()****Synopsis**

```
getInfo(infoname)
```

**Description**

Retrieve specified information. Return a constant.

**Arguments**

**infoname**

Name of the information to be obtained. Please refer to *Information* section for possible values.

**Example**

```
# Get the row activity of quadratic constraint 'qcon'
qconlb = qcon.getInfo(COPT.Info.Slack)
```

**19.2.14.9 QConstraint.setInfo()****Synopsis**

```
setInfo(infoname, newval)
```

**Description**

Set new information value to the specified quadratic constraint.

**Arguments**

**infoname**

The name of the information to be set. Please refer to *Information* section for possible values.

**newval**



New information value to be set.

#### Example

```
# Set the lower bound of quadratic constraint 'qcon'
qcon.setInfo(COPT.Info.LB, 1.0)
```

#### 19.2.14.10 Constraint.remove()

##### Synopsis

```
remove()
```

##### Description

Delete the quadratic constraint from model.

#### Example

```
# Delete the quadratic constraint 'qconx'
qconx.remove()
```

#### 19.2.15 QConstrArray Class

To facilitate users to operate on multiple *QConstraint Class* objects, the Python interface of COPT provides *QConstrArray* class with the following methods:

##### 19.2.15.1 QConstrArray()

##### Synopsis

```
QConstrArray(qconstrs=None)
```

##### Description

Create a *QConstrArray Class* object.

If parameter `qconstrs` is `None`, the create an empty *QConstrArray Class* object, otherwise initialize the newly created *QConstrArray Class* object with parameter `qconstrs`

##### Arguments

`qconstrs`

Quadratic constraints to be added. `None` by default.

`qconstrs` can be *QConstraint Class* object, *QConstrArray Class* object, list, dictionary or *tupledict Class* object.

#### Example

```
# Create an empty QConstrArray object
qconarr = QConstrArray()
# Create an QConstrArray object initialized with quadratic constraint qconx and qcony
qconarr = QConstrArray([qconx, qcony])
```

### 19.2.15.2 QConstrArray.pushBack()

#### Synopsis

`pushBack(constr)`

#### Description

Add single or multiple *QConstraint Class* object.

#### Arguments

`constr`

Quadratic constraints to be added. `None` by default.

`qconstrs` can be *QConstraint Class* object, *QConstrArray Class* object, list, dictionary or *tupledict Class* object.

#### Example

```
# Add quadratic constraint qr to qconarr
qconarr.pushBack(qr)
# Add quadratic constraint qr0 and qr1 to qconarr
qconarr.pushBack([qr0, qr1])
```

### 19.2.15.3 QConstrArray.getQConstr()

#### Synopsis

`getQConstr(idx)`

#### Description

Retrieve the quadratic constraint according to its subscript in *QConstrArray Class* object. Return a *QConstraint Class* object.

#### Arguments

`idx`

Subscript of the desired quadratic constraint in *QConstrArray Class* object, starting with 0.

#### Example

```
# Retrieve the quadratic constraint with subscript 1 in qconarr
qcon = qconarr.getQConstr(1)
```

### 19.2.15.4 QConstrArray.getSize()

#### Synopsis

`getSize()`

#### Description

Get the number of elements in *QConstrArray Class* object.

#### Example

```
# Get the number of quadratic constraints in qconarr
qarrsize = qconarr.getSize()
```

### 19.2.16 QConstrBuilder Class

QConstrBuilder object contains operations related to temporary constraints when building quadratic constraints, and provides the following methods:

#### 19.2.16.1 QConstrBuilder()

##### Synopsis

```
QConstrBuilder()
```

##### Description

Create an empty *QConstrBuilder Class* object.

##### Example

```
# Create an empty quadratic constraint builder
qconstrbuilder = QConstrBuilder()
```

#### 19.2.16.2 QConstrBuilder.setBuilder()

##### Synopsis

```
setBuilder(expr, sense, rhs)
```

##### Description

Set expression, constraint type and RHS for quadratic constraint builder.

##### Arguments

**expr**

The expression to be set, which can be *Var Class* object, *LinExpr Class* object or *QuadExpr Class* object.

**sense**

Sense of quadratic constraint. The full list of available types can be found in Constraint type section.

**rhs**

Right hand side of quadratic constraint.

##### Example

```
# Set the expression of quadratic constraint builder as: x+y, sense of constraint as equal and
↳RHS as 1
qconstrbuilder.setBuilder(x + y, COPT.LESS_EQUAL, 1.0)
```

#### 19.2.16.3 QConstrBuilder.getQuadExpr()

##### Synopsis

```
getQuadExpr()
```

##### Description

Retrieve the expression of a quadratic constraint builder object.

##### Example

```
# Retrieve the expression of a quadratic constraint builder
quadexpr = constrbuilder.getQuadExpr()
```

#### 19.2.16.4 QConstrBuilder.getSense()

##### Synopsis

```
getSense()
```

##### Description

Retrieve the constraint sense of quadratic constraint builder object.

##### Example

```
# Retrieve the constraint sense of quadratic constraint builder object.
qconsense = qconstrbuilder.getSense()
```

### 19.2.17 QConstrBuilderArray Class

To facilitate users to operate on multiple *QConstrBuilder Class* objects, the Python interface of COPT provides QConstrArray object with the following methods:

#### 19.2.17.1 QConstrBuilderArray()

##### Synopsis

```
QConstrBuilderArray(qconstrbuilders=None)
```

##### Description

Create a *QConstrBuilderArray Class* object.

If parameter *qconstrbuilders* is *None*, then create an empty *QConstrBuilderArray Class* object, otherwise initialize the newly created *QConstrBuilderArray Class* object by parameter *qconstrbuilders*.

##### Arguments

*qconstrbuilders*

Quadratic constraint builder to be added. Optional, *None* by default. Can be *QConstrBuilder Class* object, *QConstrBuilderArray Class* object, list, dictionary or *tupledict Class* object.

##### Example

```
# Create an empty QConstrBuilderArray object.
qconbuilderarr = QConstrBuilderArray()
# Create a QConstrBuilderArray object and initialize it with builders: qconbuilderx and
↪ qconbuildery
qconbuilderarr = QConstrBuilderArray([qconbuilderx, qconbuildery])
```

### 19.2.17.2 QConstrBuilderArray.pushBack()

#### Synopsis

```
pushBack(qconstrbuilder)
```

#### Description

Add single or multiple *QConstrBuilder Class* objects.

#### Arguments

qconstrbuilder

Builder of quadratic constraint to be added, which can be *QConstrBuilder Class* object, *QConstrBuilderArray Class* object, list, dictionary or *tuple-dict Class* object.

#### Example

```
# Add quadratic constraint builder qconbuilderx to qconbuilderarr
qconbuilderarr.pushBack(qconbuilderx)
# Add quadratic constraint builders qconbuilderx and qconbuildery to qconbuilderarr
qconbuilderarr.pushBack([qconbuilderx, qconbuildery])
```

### 19.2.17.3 QConstrBuilderArray.getBuilder()

#### Synopsis

```
getBuilder(idx)
```

#### Description

Retrieve the corresponding builder object according to the subscript of quadratic constraint builder in *QConstrBuilderArray Class* object.

#### Arguments

idx

Subscript of the quadratic constraint builder in the *QConstrBuilderArray Class* object, starting with 0.

#### Example

```
# Retrieve the builder with subscript 1 in qconbuilderarr
qconbuilder = qconbuilderarr.getBuilder(1)
```

### 19.2.17.4 QConstrBuilderArray.getSize()

#### Synopsis

```
getSize()
```

#### Description

Get the number of elements in *QConstrBuilderArray Class* object.

#### Example

```
# Get the number of builders in qconbuilderarr
qarrsize = qconbuilderarr.getSize()
```

### 19.2.18 PsdConstraint Class

PsdConstraint object contains related operations of COPT positive semi-definite constraints and provides the following methods:

#### 19.2.18.1 PsdConstraint.getName()

##### Synopsis

```
getName()
```

##### Description

Retrieve the name of positive semi-definite constraint.

##### Example

```
# Retrieve the name of positive semi-definite constraint 'con'.
conname = con.getName()
```

#### 19.2.18.2 PsdConstraint.getIdx()

##### Synopsis

```
getIdx()
```

##### Description

Retrieve the subscript of positive semi-definite constraint in the model.

##### Example

```
# Retrieve the subscript of positive semi-definite constraint con.
conidx = con.getIdx()
```

#### 19.2.18.3 PsdConstraint.setName()

##### Synopsis

```
setName(newname)
```

##### Description

Set the name of positive semi-definite constraint.

##### Arguments

**newname**

The name of positive semi-definite constraint to be set.

##### Example

```
# Set the name of positive semi-definite constraint 'con'.
con.setName('con')
```

#### 19.2.18.4 PsdConstraint.getInfo()

##### Synopsis

```
getInfo(infoname)
```

##### Description

Retrieve specified information. Return a constant.

##### Arguments

`infoname`

Name of the information to be obtained. Please refer to *Information* section for possible values.

##### Example

```
# Get the lower bound of positive semi-definite constraint con
conlb = con.getInfo(COPT.Info.LB)
```

#### 19.2.18.5 PsdConstraint.setInfo()

##### Synopsis

```
setInfo(infoname, newval)
```

##### Description

Set new information value to the specified positive semi-definite constraint.

##### Arguments

`infoname`

The name of the information to be set. Please refer to *Information* section for possible values.

`newval`

New information value to be set.

##### Example

```
# Set the lower bound of positive semi-definite constraint con
con.setInfo(COPT.Info.LB, 1.0)
```

#### 19.2.18.6 PsdConstraint.remove()

##### Synopsis

```
remove()
```

##### Description

Delete the positive semi-definite constraint from model.

##### Example

```
# Delete the positive semi-definite constraint 'conx'
conx.remove()
```

### 19.2.19 PsdConstrArray Class

To facilitate users to operate on multiple *PsdConstraint Class* objects, the Python interface of COPT provides PsdConstrArray class with the following methods:

#### 19.2.19.1 PsdConstrArray()

##### Synopsis

```
PsdConstrArray(constrs=None)
```

##### Description

Create a *PsdConstrArray Class* object.

If parameter `constrs` is `None`, the create an empty *PsdConstrArray Class* object, otherwise initialize the newly created *PsdConstrArray Class* object with parameter `constrs`

##### Arguments

`constrs`

Positive semi-definite constraints to be added. `None` by default.

`constrs` can be *PsdConstraint Class* object, *PsdConstrArray Class* object, list, dictionary or *tupledict Class* object.

##### Example

```
# Create an empty PsdConstrArray object
conarr = PsdConstrArray()
# Create an PsdConstrArray object containing positive semi-definite constraint conx and cony
conarr = PsdConstrArray([conx, cony])
```

#### 19.2.19.2 PsdConstrArray.pushBack()

##### Synopsis

```
pushBack(constr)
```

##### Description

Add single or multiple *PsdConstraint Class* objects.

##### Arguments

`constr`

Positive semi-definite constraints to be applied. `constrs` can be *Psd-Constraint Class* object, *PsdConstrArray Class* object, list, dictionary or *tupledict Class* object.

##### Example

```
# Add positive semi-definite constraint r to conarr
conarr.pushBack(r)
# Add positive semi-definite constraint r0 and r1 to conarr
conarr.pushBack([r0, r1])
```



### 19.2.19.3 PsdConstrArray.getPsdConstr()

#### Synopsis

```
getPsdConstr(idx)
```

#### Description

Retrieve the positive semi-definite constraint according to its subscript in *PsdConstrArray Class* object. Return a *PsdConstraint Class* object.

#### Arguments

idx

Subscript of the desired positive semi-definite constraint in *PsdConstrArray Class* object, starting with 0.

#### Example

```
# Retrieve the positive semi-definite constraint with subscript 1 in conarr
con = conarr.getPsdConstr(1)
```

### 19.2.19.4 PsdConstrArray.getSize()

#### Synopsis

```
getSize()
```

#### Description

Get the number of elements in *PsdConstrArray Class* object.

#### Example

```
# Get the number of positive semi-definite constraints in conarr
arrsize = conarr.getSize()
```

## 19.2.20 PsdConstrBuilder Class

*PsdConstrBuilder* object contains operations related to temporary constraints when building positive semi-definite constraints, and provides the following methods:

### 19.2.20.1 PsdConstrBuilder()

#### Synopsis

```
PsdConstrBuilder()
```

#### Description

Create an empty *PsdConstrBuilder Class* object

#### Example

```
# Create an empty positive semi-definite constraint builder
constrbuilder = PsdConstrBuilder()
```

### 19.2.20.2 PsdConstrBuilder.setBuilder()

#### Synopsis

```
setBuilder(expr, sense, rhs)
```

#### Description

Set expression, constraint type and right hand side for positive semi-definite constraint builder.

#### Arguments

**expr**

The expression to be set, which can be *PsdVar Class* expression or *PsdExpr Class* expression.

**sense**

Sense of constraint. The full list of available types can be found in Constraint type section.

**rhs**

The right hand side of constraint.

#### Example

```
# Set the expression of positive semi-definite constraint builder as: x + y == 1, and sense of
↳ constraint as equal
constrbuilder.setBuilder(x + y, COPT.EQUAL, 1)
```

### 19.2.20.3 PsdConstrBuilder.setRange()

#### Synopsis

```
setRange(expr, range)
```

#### Description

Set a range positive semi-definite constraint builder where **expr** is less than or equals to 0 and greater than or equals to - **range**.

#### Arguments

**expr**

The expression to be set, which can be *PsdVar Class* expression or *PsdExpr Class* expression.

**range**

Range of constraint, nonnegative constant.

#### Example

```
# Set a range positive semi-definite constraint builder: -1 <= x + y - 1 <= 0
constrbuilder.setRange(x + y - 1, 1)
```

#### 19.2.20.4 PsdConstrBuilder.getPsdExpr()

##### Synopsis

`getPsdExpr()`

##### Description

Retrieve the expression of a positive semi-definite constraint builder object.

##### Example

```
# Retrieve the expression of a positive semi-definite constraint builder
psdexpr = constrbuilder.getPsdExpr()
```

#### 19.2.20.5 PsdConstrBuilder.getSense()

##### Synopsis

`getSense()`

##### Description

Retrieve the constraint sense of positive semi-definite constraint builder object.

##### Example

```
# Retrieve the constraint sense of positive semi-definite constraint builder object.
consense = constrbuilder.getSense()
```

#### 19.2.20.6 PsdConstrBuilder.getRange()

##### Synopsis

`getRange()`

##### Description

Retrieve the range of positive semi-definite constraint builder object, i.e. length from lower bound to upper bound of the constraint

##### Example

```
# Retrieve the range of positive semi-definite constraint builder object
rngval = constrbuilder.getRange()
```

### 19.2.21 PsdConstrBuilderArray Class

To facilitate users to operate on multiple *PsdConstrBuilder Class* objects, the Python interface of COPT provides PsdConstrBuilderArray object with the following methods:

### 19.2.21.1 PsdConstrBuilderArray()

#### Synopsis

```
PsdConstrBuilderArray(builders=None)
```

#### Description

Create a *PsdConstrBuilderArray Class* object.

If parameter **builders** is **None**, then create an empty *PsdConstrBuilderArray Class* object, otherwise initialize the newly created *PsdConstrBuilderArray Class* object by parameter **builders**.

#### Arguments

**builders**

Positive semi-definite constraint builder to be added. Optional, **None** by default. Can be *PsdConstrBuilder Class* object, *PsdConstrBuilderArray Class* object, list, dictionary or *tupledict Class* object.

#### Example

```
# Create an empty PsdConstrBuilderArray object.
conbuilderarr = PsdConstrBuilderArray()
# Create a PsdConstrBuilderArray object containing builders: conbuilderx and conbuildery
conbuilderarr = PsdConstrBuilderArray([conbuilderx, conbuildery])
```

### 19.2.21.2 PsdConstrBuilderArray.pushBack()

#### Synopsis

```
pushBack(builder)
```

#### Description

Add single or multiple *PsdConstrBuilder Class* objects.

#### Arguments

**builder**

Builder of positive semi-definite constraint to be added, which can be *PsdConstrBuilder Class* object, *PsdConstrBuilderArray Class* object, list, dictionary or *tupledict Class* object.

#### Example

```
# Add positive semi-definite constraint builder conbuilderx to conbuilderarr
conbuilderarr.pushBack(conbuilderx)
# Add positive semi-definite constraint builders conbuilderx and conbuildery to conbuilderarr
conbuilderarr.pushBack([conbuilderx, conbuildery])
```

### 19.2.21.3 `PsdConstrBuilderArray.getBuilder()`

#### Synopsis

```
getBuilder(idx)
```

#### Description

Retrieve the corresponding builder object according to the subscript of positive semi-definite constraint builder in *PsdConstrBuilderArray Class* object.

#### Arguments

`idx`

Subscript of the positive semi-definite constraint builder in the *PsdConstrBuilderArray Class* object, starting with 0.

#### Example

```
# Retrieve the builder with subscript 1 in conbuilderarr
conbuilder = conbuilderarr.getBuilder(1)
```

### 19.2.21.4 `PsdConstrBuilderArray.getSize()`

#### Synopsis

```
getSize()
```

#### Description

Get the number of elements in *PsdConstrBuilderArray Class* object.

#### Example

```
# Get the number of builders in conbuilderarr
arrsize = conbuilderarr.getSize()
```

## 19.2.22 SOS Class

SOS object contains related operations of COPT SOS constraints. The following methods are provided:

### 19.2.22.1 `SOS.getIdx()`

#### Synopsis

```
getIdx()
```

#### Description

Retrieve the subscript of SOS constraint in model.

#### Example

```
# Retrieve the subscript of SOS constraint sosx.
sosidx = sosx.getIdx()
```

### 19.2.22.2 SOS.remove()

#### Synopsis

```
remove()
```

#### Description

Delete the SOS constraint from model.

#### Example

```
# Delete the SOS constraint 'sosx'
sosx.remove()
```

## 19.2.23 SOSArray Class

To facilitate users to operate on a set of *SOS Class* objects, COPT designed SOSArray class in Python interface. The following methods are provided:

### 19.2.23.1 SOSArray()

#### Synopsis

```
SOSArray(soss=None)
```

#### Description

Create a *SOSArray Class* object.

If parameter `soss` is `None`, then build an empty *SOSArray Class* object, otherwise initialize the newly created *SOSArray Class* object with `soss`.

#### Arguments

`soss`

SOS constraint to be added. Optional, `None` by default. Can be *SOS Class* object, *SOSArray Class* object, list, dictionary or *tupledict Class* object.

#### Example

```
# Create a new SOSArray object
sosarr = SOSArray()
# Create a SOSArray object, and initialize it with SOS constraints sosx and sosy.
sosarr = SOSArray([sosx, sosy])
```

### 19.2.23.2 SOSArray.pushBack()

#### Synopsis

```
pushBack(sos)
```

#### Description

Add one or multiple *SOS Class* objects.

#### Arguments

`sos`

SOS constraints to be added, which can be *SOS Class* object, *SOSArray Class* object, list, dictionary or *tupledict Class* object.

#### Example

```
# Add SOS constraint sosx to sosarr
sosarr.pushBack(sosx)
# Add SOS constraints sosx and sosy to sosarr
sosarr.pushBack([sosx, sosy])
```

### 19.2.23.3 SOSArray.getSOS()

#### Synopsis

```
getSOS(idx)
```

#### Description

Retrieve the corresponding SOS constraint according to its subscript in *SOSArray Class* object and return a *SOS Class* object.

#### Arguments

idx

Indices of the SOS constraint in *SOSArray Class* object, starting with 0.

#### Example

```
# Retrieve the SOS constraint with indice of 1 in sosarr
sos = sosarr.getSOS(1)
```

### 19.2.23.4 SOSArray.getSize()

#### Synopsis

```
getSize()
```

#### Description

Retrieve the number of elements in *SOSArray Class* object.

#### Example

```
# Retrieve the number of SOS constraints in sosarr.
arrsize = sosarr.getSize()
```

## 19.2.24 SOSBuilder Class

For easy access builders of SOS constraints, SOSBuilder class provides the following methods:

### 19.2.24.1 SOSBuilder()

#### Synopsis

```
SOSBuilder()
```

#### Description

Create an empty *SOSBuilder Class* object.

#### Example

```
# Create an empty SOSBuilder object.
sosbuilder = SOSBuilder()
```

#### 19.2.24.2 SOSBuilder.setBuilder()

##### Synopsis

```
setBuilder(sostype, vars, weights=None)
```

##### Description

Set type, variable, weight of variable on *SOSBuilder Class* object.

##### Arguments

**sostype**

SOS constraint type. Full list of available types can be found in SOS-constraint types.

**vars**

Variables of SOS constarint, which can be *VarArray Class* object, list, dictionary or *tupledict Class* object.

**weights** Weights of variables in SOS constraint. Optional, None by default. Could be list, dictionary or *tupledict Class* object.

##### Example

```
# Set the type of SOS constraint builder as SOS1, variables x and y, weights of variables as 1
↳ and 2 respectively.
sosbuilder.setBuilder(COPT.SOS_TYPE1, [x, y], [1, 2])
```

#### 19.2.24.3 SOSBuilder.getType()

##### Synopsis

```
getType()
```

##### Description

Retrieve the SOS constraint type of *SOSBuilder Class* object.

##### Example

```
# Retrieve the type of SOS constraint builder sosx.
sostype = sosbuilder.getType(sosx)
```

#### 19.2.24.4 SOSBuilder.getVar()

##### Synopsis

```
getVar(idx)
```

##### Description

Retrieve the corresponding variables according to its indice in *SOSBuilder Class* object, and return a *Var Class* object.

##### Arguments

**idx**

Indice of the variable in *SOSBuilder Class* object, starting with 0.

##### Example

```
# Retrieve the variable in SOS constraint builder sosx with indice of 1
sosvar = sosx.getVar(1)
```



#### 19.2.24.5 SOSBuilder.getVars()

##### Synopsis

getVars()

##### Description

Retrieve all variables in *SOSBuilder Class* objects, and return a *VarArray Class* object.

##### Example

```
# Retrieve all variables in SOS constraint builder sosx.
sosvars = sosx.getVars()
```

#### 19.2.24.6 SOSBuilder.getWeight()

##### Synopsis

getWeight(idx)

##### Description

Retrieve the corresponding weight of variable according to its indice in *SOSBuilder Class* object.

##### Arguments

idx

Indice of the variable in *SOSBuilder Class* object, starting with 0.

##### Example

```
# Retrieve the corresponding weight of variable according to its indice in the SOS constraint
↪builder sosx.
sosweight = sosx.getWeight(1)
```

#### 19.2.24.7 SOSBuilder.getWeights()

##### Synopsis

getWeights()

##### Description

Retrieve weights of all the variables in *SOSBuilder Class* object.

##### Example

```
# Retrieve weights of all the variables in SOS constraint builder sosx.
sosweights = sosx.getWeights()
```

#### 19.2.24.8 SOSBuilder.getSize()

##### Synopsis

```
getSize()
```

##### Description

Retrieve the number of elements in *SOSBuilder Class* object.

##### Example

```
# Retrieve the number of elements in SOS constraint builder sosx.
sossizex = sosx.getSize()
```

### 19.2.25 SOSBuilderArray Class

In order to facilitate users to operate on a set of *SOSBuilder Class* objects, COPT provides *SOSBuilderArray* class in Python interface, providing the following methods:

#### 19.2.25.1 SOSBuilderArray()

##### Synopsis

```
SOSBuilderArray(sosbuilders=None)
```

##### Description

Create a *SOSBuilderArray Class* object.

If parameter *sosbuilders* is *None*, then create an empty *SOSBuilderArray Class* object, otherwise initialize the newly created *SOSBuilderArray Class* object with parameter *sosbuilders*.

##### Arguments

*sosbuilders*

SOS constraint builder to be added. Optional, *None* by default. Could be *SOSBuilder Class* object, *SOSBuilderArray Class* object, list, dictionary or *tupledict Class* object.

##### Example

```
# Create an empty SOSBuilderArray object.
sosbuilderarr = SOSBuilderArray()
# Create a SOSBuilderArray object and initialize it with SOS constraint builder sosx and sosy
sosbuilderarr = SOSBuilderArray([sosx, sosy])
```

#### 19.2.25.2 SOSBuilderArray.pushBack()

##### Synopsis

```
pushBack(sosbuilder)
```

##### Description

Add one or multiple *SOSBuilder Class* objects.

##### Arguments

*sosbuilder*

SOS constraint builderto be added. Could be *SOSBuilder Class* object, *SOSBuilderArray Class* object, list, dictionary or *tupledict Class* object.

**Example**

```
# Add SOS constraint builder sosx to sosbuilderarr
sosbuilderarr.pushBack(sosx)
```

**19.2.25.3 SOSBuilderArray.getBuilder()****Synopsis**

```
getBuilder(idx)
```

**Description**

Retrieve the corresponding builder according to the indice of SOS constraint builder in *SOSBuilderArray Class* object.

**Arguments**

idx

Indice of the SOS constraint builder in *SOSBuilderArray Class* object, starting with 0.

**Example**

```
# Retrieve the SOS constraint builder with indice of 1 in sosbuilderarr
sosbuilder = sosbuilderarr.getBuilder(1)
```

**19.2.25.4 SOSBuilderArray.getSize()****Synopsis**

```
getSize()
```

**Description**

Retrieve the number of elements in *SOSBuilderArray Class* object.

**Example**

```
# Retrieve the number of elements in sosbuilderarr
sosbuildersize = sosbuilderarr.getSize()
```

**19.2.26 Cone Class**

Cone object contains related operations of COPT Second-Order-Cone (SOC) constraints. The following methods are provided:

**19.2.26.1 Cone.getIdx()****Synopsis**

```
getIdx()
```

**Description**

Retrieve the subscript of SOC constraint in model.

**Example**

```
# Retrieve the subscript of SOC constraint cone.
coneidx = cone.getIdx()
```

### 19.2.26.2 Cone.remove()

#### Synopsis

```
remove()
```

#### Description

Delete the SOC constraint from model.

#### Example

```
# Delete the SOC constraint 'cone'
cone.remove()
```

## 19.2.27 ConeArray Class

To facilitate users to operate on a set of *Cone Class* objects, COPT designed ConeArray class in Python interface. The following methods are provided:

### 19.2.27.1 ConeArray()

#### Synopsis

```
ConeArray(cones=None)
```

#### Description

Create a *ConeArray Class* object.

If parameter `cones` is `None`, then build an empty *ConeArray Class* object, otherwise initialize the newly created *ConeArray Class* object with `cones`.

#### Arguments

`cones`

Second-Order-Cone constraint to be added. Optional, `None` by default.  
Can be *Cone Class* object, *ConeArray Class* object, list, dictionary or *tupledict Class* object.

#### Example

```
# Create a new ConeArray object
conearr = ConeArray()
# Create a ConeArray object, and initialize it with SOC constraints conex and coney.
conearr = ConeArray([conex, coney])
```

### 19.2.27.2 ConeArray.pushBack()

#### Synopsis

```
pushBack(cone)
```

#### Description

Add one or multiple *Cone Class* objects.

#### Arguments

`cone`

Second-Order-Cone constraints to be added, which can be *Cone Class* object, *ConeArray Class* object, list, dictionary or *tupledict Class* object.

**Example**

```
# Add SOC constraint conex to conearr
conearr.pushBack(conex)
# Add SOC constraints conex and coney to conearr
conearr.pushBack([conex, coney])
```

**19.2.27.3 ConeArray.getCone()****Synopsis**

```
getCone(idx)
```

**Description**

Retrieve the corresponding Second-Order-Cone (SOC) constraint according to its subscript in *ConeArray Class* object and return a *Cone Class* object.

**Arguments**

idx

Indice of the SOC constraint in *ConeArray Class* object, starting with 0.

**Example**

```
# Retrieve the SOC constraint with indice of 1 in conearr
cone = conearr.getCone(1)
```

**19.2.27.4 ConeArray.getSize()****Synopsis**

```
getSize()
```

**Description**

Retrieve the number of elements in *ConeArray Class* object.

**Example**

```
# Retrieve the number of SOC constraints in conearr.
arrsize = conearr.getSize()
```

**19.2.28 ConeBuilder Class**

For easy access builders of Second-Order-Cone (SOC) constraints, ConeBuilder class provides the following methods:

**19.2.28.1 ConeBuilder()****Synopsis**

```
ConeBuilder()
```

**Description**

Create an empty *ConeBuilder Class* object.

**Example**

```
# Create an empty ConeBuilder object.
conebuilder = ConeBuilder()
```

### 19.2.28.2 ConeBuilder.setBuilder()

#### Synopsis

```
setBuilder(conetype, vars)
```

#### Description

Set type, variables of *ConeBuilder Class* object.

#### Arguments

**conetype**

Type of Second-Order-Cone (SOC) constraint. Full list of available types can be found in SOC-constraint types.

**vars**

Variables of SOC constarint, which can be *VarArray Class* object, list, dictionary or *tupledict Class* object.

#### Example

```
# Set type as regular, variables as [z, x, y] for SOC constraint builder
conebuilder.setBuilder(COPT.CONE_QUAD, [z, x, y])
```

### 19.2.28.3 ConeBuilder.getType()

#### Synopsis

```
getType()
```

#### Description

Retrieve the Second-Order-Cone (SOC) constraint type of *ConeBuilder Class* object.

#### Example

```
# Retrieve the type of SOC constraint builder conex.
conetype = conebuilder.getType(conex)
```

### 19.2.28.4 ConeBuilder.getVar()

#### Synopsis

```
getVar(idx)
```

#### Description

Retrieve the corresponding variables according to its indice in *ConeBuilder Class* object, and return a *Var Class* object.

#### Arguments

**idx**

Indice of the variable in *ConeBuilder Class* object, starting with 0.

#### Example

```
# Retrieve the variable in SOC constraint builder conex with indice of 1
conevar = conex.getVar(1)
```

#### 19.2.28.5 ConeBuilder.getVars()

##### Synopsis

```
getVars()
```

##### Description

Retrieve all variables in *ConeBuilder Class* objects, and return a *VarArray Class* object.

##### Example

```
# Retrieve all variables in SOC constraint builder conex.
conevars = conex.getVars()
```

#### 19.2.28.6 ConeBuilder.getSize()

##### Synopsis

```
getSize()
```

##### Description

Retrieve the number of elements in *ConeBuilder Class* object.

##### Example

```
# Retrieve the number of elements in SOC constraint builder conex.
conesize = conex.getSize()
```

### 19.2.29 ConeBuilderArray Class

In order to facilitate users to operate on a set of *ConeBuilder Class* objects, COPT provides ConeBuilderArray class in Python interface, providing the following methods:

#### 19.2.29.1 ConeBuilderArray()

##### Synopsis

```
ConeBuilderArray(conebuilders=None)
```

##### Description

Create a *ConeBuilderArray Class* object.

If parameter **conebuilders** is **None**, then create an empty *ConeBuilderArray Class* object, otherwise initialize the newly created *ConeBuilderArray Class* object with parameter **conebuilders**.

##### Arguments

**conebuilders**

SOC constraint builder to be added. Optional, **None** by default. Could be *ConeBuilder Class* object, *ConeBuilderArray Class* object, list, dictionary or *tupledict Class* object.

##### Example

```
# Create an empty ConeBuilderArray object.
conebuilderarr = ConeBuilderArray()
# Create a ConeBuilderArray object and initialize it with SOC constraint builder conex and
↳ coney
conebuilderarr = ConeBuilderArray([conex, coney])
```

### 19.2.29.2 ConeBuilderArray.pushBack()

#### Synopsis

```
pushBack(coneuilder)
```

#### Description

Add one or multiple *ConeBuilder Class* objects.

#### Arguments

conebuilder

SOC constraint builder to be added. Could be *ConeBuilder Class* object, *ConeBuilderArray Class* object, list, dictionary or *tupledict Class* object.

#### Example

```
# Add SOC constraint builder conex to conebuilderarr
conebuilderarr.pushBack(conex)
```

### 19.2.29.3 ConeBuilderArray.getBuilder()

#### Synopsis

```
getBuilder(idx)
```

#### Description

Retrieve the corresponding builder according to the indice of SOC constraint builder in *ConeBuilderArray Class* object.

#### Arguments

idx

Indice of the SOC constraint builder in *ConeBuilderArray Class* object, starting with 0.

#### Example

```
# Retrieve the SOC constraint builder with indice of 1 in conebuilderarr
conebuilder = conebuilderarr.getBuilder(1)
```

### 19.2.29.4 ConeBuilderArray.getSize()

#### Synopsis

```
getSize()
```

#### Description

Retrieve the number of elements in *ConeBuilderArray Class* object.

#### Example



```
# Retrieve the number of elements in conebuilderarr
conebuildersize = conebuilderarr.getSize()
```

### 19.2.30 GenConstr Class

For easy access to Indicator constraints, COPT provides GenConstr class which containing the following methods:

#### 19.2.30.1 GenConstr.getIdx()

##### Synopsis

```
getIdx()
```

##### Description

Retrieve the subscript of Indicator constraint in model.

##### Example

```
# Retrieve the indice of Indicator constraint indicx
indidx = indicx.getIdx()
```

#### 19.2.30.2 GenConstr.remove()

##### Synopsis

```
remove()
```

##### Description

Delete the indicator constraint from model.

##### Example

```
# Delete indicator constraint 'indx'
indx.remove()
```

### 19.2.31 GenConstrArray Class

In order to facilitate users to operate on a set of *GenConstr Class* objects, COPT provides GenConstrArray class in Python interface, providing the following methods:

#### 19.2.31.1 GenConstrArray()

##### Synopsis

```
GenConstrArray(genconstrs=None)
```

##### Description

Create a *GenConstrArray Class* object.

If parameter `genconstrs` is `None`, then create an empty *GenConstrArray Class* object, otherwise initialize the newly created *GenConstrArray Class* object with parameter `genconstrs`.

##### Arguments

`genconstrs`

Indicator constraint to be added. Optional, `None` by default. Could be *GenConstr Class* object, *GenConstrArray Class* object, list, dictionary or *tupledict Class* object.

#### Example

```
# Create a new GenConstrArray object
genconstrarr = GenConstrArray()
# Create a GenConstrArray object and user Indicator constraints genx and geny to initialize it.
genconstrarr = GenConstrArray([genx, geny])
```

### 19.2.31.2 GenConstrArray.pushBack()

#### Synopsis

```
pushBack(genconstr)
```

#### Description

Add one or multiple *GenConstr Class* objects.

#### Arguments

**constrs** The Indicator constraint to be added. Could be *GenConstr Class* object, *GenConstrArray Class* object, list, dictionary or *tupledict Class* object.

#### Example

```
# Aff Indicator constraint genx to genconarr
genconarr.pushBack(genx)
# Add Indicator constraint genx and geny to genconarr
genconarr.pushBack([genx, geny])
```

### 19.2.31.3 GenConstrArray.getGenConstr()

#### Synopsis

```
getGenConstr(idx)
```

#### Description

Retrieve the corresponding Indicator constraint according to the indice of Indicator constraint in *GenConstrArray Class* object, and return a *GenConstr Class* object.

#### Arguments

**idx**

Indice of the Indicator constraint in *GenConstrArray Class*, starting with 0.

#### Example

```
# Retrieve the Indicator constraint with indice of 1 in genconarr
genconstr = genconarr.getGenConstr(1)
```

#### 19.2.31.4 GenConstrArray.getSize()

##### Synopsis

getSize()

##### Description

Retrieve the number of elements in *GenConstrArray Class* object.

##### Example

```
# Retrieve the number of elements in genconarr
genconsize = genconarr.getSize()
```

### 19.2.32 GenConstrBuilder Class

GenConstrBuilder object contains operations for building Indicator constraints, and provides the following methods:

#### 19.2.32.1 GenConstrBuilder()

##### Synopsis

GenConstrBuilder()

##### Description

Create an empty *GenConstrBuilder Class* object.

##### Example

```
# Create an empty GenConstrBuilder object
genconbuilder = GenConstrBuilder()
```

#### 19.2.32.2 GenConstrBuilder.setBuilder()

##### Synopsis

setBuilder(var, val, expr, sense)

##### Description

Set Indicator variable, the value of Indicator variable, the expression and constraint sense of a *GenConstrBuilder Class* object.

##### Arguments

var

Indicator variable.

val

Value of an Indicator variable.

expr

Expression of linear constraint. Can be *Var Class* object or *LinExpr Class* object.

sense

Sense for the linear constraint. Please refer to Constraint type for possible values.

**Example**

```
# Set Indicator variable of Indicator constraint builder to x. When x is true, the linear
↪ constraint  $x + y == 1$  holds
genconbuilder.setBuilder(x, True, x + y - 1, COPT.EQUAL)
```

**19.2.32.3 GenConstrBuilder.getBinVar()****Synopsis**

```
getBinVar()
```

**Description**

Retrieve the Indicator variable of a *GenConstrBuilder Class* object.

**Example**

```
# Retrieve the Indicator variable of Indicator constraint builder genbuilderx
indvar = genbuilderx.getBinVar()
```

**19.2.32.4 GenConstrBuilder.getBinVal()****Synopsis**

```
getBinVal()
```

**Description**

Retrieve the value of Indicator variable of a *GenConstrBuilder Class* object.

**Example**

```
# Retrieve the value when the Indicator variable of Indicator constraint builder genbuilderx
↪ is valid
indval = genbuilderx.getBinVal()
```

**19.2.32.5 GenConstrBuilder.getExpr()****Synopsis**

```
getExpr()
```

**Description**

Retrieve the linear expression of a *GenConstrBuilder Class* object.

**Example**

```
# Retrieve the linear expression of Indicator constraint builder genbuilderx
linexpr = genbuilderx.getExpr()
```

### 19.2.32.6 GenConstrBuilder.getSense()

#### Synopsis

```
getSense()
```

#### Description

Retrieve the sense for the linear constraint of a *GenConstrBuilder Class* object.

#### Example

```
# Retrieve the sense for the linear constraint of Indicator constraint builder genbuilderx
linsense = genbuilderx.getSense()
```

## 19.2.33 GenConstrBuilderArray Class

To facilitate users to operate on multiple *GenConstrBuilder Class* objects, the Python interface of COPT provides GenConstrBuilderArray object with the following methods:

### 19.2.33.1 GenConstrBuilderArray()

#### Synopsis

```
GenConstrBuilderArray(genconstrbuilders=None)
```

#### Description

Create a *GenConstrBuilderArray Class* object.

If argument `genconstrbuilders` is `None`, then create an empty *GenConstrBuilderArray Class* object; otherwise use the argument `genconstrbuilders` to initialize the newly created *GenConstrBuilderArray Class* object.

#### Arguments

`genconstrbuilders`

Indicator constraint builder to add. Optional, `None` by default. Can be *GenConstrBuilder Class* object, *GenConstrBuilderArray Class* object, list, dict, or *tupledict Class* object.

#### Example

```
# Create an empty GenConstrBuilderArray object
genbuilderarr = GenConstrBuilderArray()
# Create a GenConstrBuilderArray object and use Indicator constraint builder genbuilderx and
↳ genbuildery to initialize it.
genbuilderarr = GenConstrBuilderArray([genbuilderx, genbuildery])
```

### 19.2.33.2 GenConstrBuilderArray.pushBack()

#### Synopsis

```
pushBack(genconstrbuilder)
```

#### Description

Add single or multiple *GenConstrBuilder Class* objects.

#### Arguments

`genconstrbuilder`

Indicator constraint builders to add. Can be *GenConstrBuilder Class* object, *GenConstrBuilderArray Class* object, list, dict, or *tupledict Class* object.

#### Example

```
# Add an Indicator constraint builder to genbuilderarr
genbuilderarr.pushBack(genbuilderx)
# Add Indicator constraint builders genbuilderx and genbuildery to genbuilderarr
genbuilderarr.pushBack([genbuilderx, genbuildery])
```

### 19.2.33.3 GenConstrBuilderArray.getBuilder()

#### Synopsis

```
getBuilder(idx)
```

#### Description

Retrieve the Indicator constraint builder according to its index in the *GenConstrBuilderArray Class* object, and return a *GenConstrBuilder Class* object.

#### Arguments

idx

Index of the Indicator constraint builder in the *GenConstrBuilderArray Class* object, starting with 0.

#### Example

```
# Retrieve the Indicator constraint builder whose index in genbuilderarr is 1
genbuilder = genbuilderarr.getBuilder(1)
```

### 19.2.33.4 GenConstrBuilderArray.getSize()

#### Synopsis

```
getSize()
```

#### Description

Retrieve the number of elements in the *GenConstrBuilderArray Class* object.

#### Example

```
# Retrieve the number of elements in genbuilderarr
genbuildersize = genbuilderarr.getSize()
```

## 19.2.34 Column Class

To facilitate users to model by column, the Python interface of COPT provides Column object with the following methods:

### 19.2.34.1 Column()

#### Synopsis

```
Column(constrs=0.0, coeffs=None)
```

#### Description

Create an *Column Class* object.

If argument `constrs` is `None` and argument `coeffs` is `None`, then create an empty *Column Class* object; otherwise use the argument `constrs` and `coeffs` to initialize the newly created *Column Class* object. If argument `constrs` is a *Constraint Class* or *Column Class* object, then argument `coeffs` is a constant. If argument `coeffs` is `None`, then it is considered to be constant 1.0; If argument `constrs` is a list and argument `coeffs` is `None`, then the elements of argument `constrs` are constraint-coefficient pairs; For other forms of arguments, call method `addTerms` to initialize the newly created *Column Class* object.

#### Arguments

`constrs`

Linear constraint.

`coeffs`

Coefficient for variables in the linear constraint.

#### Example

```
# Create an empty Column object
col = Column()
# Create a Column object and add two terms: coefficient is 2 in constraint conx and 3 in
↳constraint cony
col = Column([(conx, 2), (cony, 3)])
# Create a Column object and add two terms: coefficient is 1 in constraint conxx and 2 in
↳constraint conyy
col = Column([conxx, conyy], [1, 2])
```

### 19.2.34.2 Column.getCoeff()

#### Synopsis

```
getCoeff(idx)
```

#### Description

Retrieve the coefficient according to its index in the *Column Class* object.

#### Arguments

`idx`

Index for the element, starting with 0.

#### Example

```
# Retrieve the coefficient whose index is 0 in col
coeff = col.getCoeff(0)
```

### 19.2.34.3 Column.getConstr()

#### Synopsis

```
getConstr(idx)
```

#### Description

Retrieve the linear constraint according to its index in the *Column Class* object.

#### Arguments

`idx`

Index for the element, starting with 0.

#### Example

```
# Retrieve the linear constraint whose index is 1 in col
constr = col.getConstr(1)
```

### 19.2.34.4 Column.getSize()

#### Synopsis

```
getSize()
```

#### Description

Retrieve the number of elements in the *Column Class* object.

#### Example

```
# Retrieve the number of elements in col
colsize = col.getSize()
```

### 19.2.34.5 Column.addTerm()

#### Synopsis

```
addTerm(constr, coeff=1.0)
```

#### Description

Add a new term.

#### Arguments

`constr`

The linear constraint for the term to add.

`coeff`

The coefficient for the term to add. Optional, 1.0 by default.

#### Example

```
# Add an term to col, whose constraint is cony and coefficient is 2.0
col.addTerm(cony, 2.0)
# Add an term to col, whose constraint is conx and coefficient is 1.0
col.addTerm(conx)
```



#### 19.2.34.6 Column.addTerms()

##### Synopsis

```
addTerms(constrs, coeffs)
```

##### Description

Add single or multiple terms.

If argument `constrs` is *Constraint Class* object, then argument `coeffs` is constant;  
If argument `constrs` is *ConstrArray Class* object or list, then argument `coeffs` is constant or list;  
If argument `constrs` is dictionary or *tupledict Class* object, then argument `coeffs` is constant, dict, or *tupledict Class* object.

##### Arguments

`constrs`

The linear constraints for terms to add.

`coeffs`

The coefficients for terms to add.

##### Example

```
# Add two terms: constraint conx with coefficient 2.0, constraint cony with coefficient 3.0
col.addTerms([conx, cony], [2.0, 3.0])
```

#### 19.2.34.7 Column.addColumn()

##### Synopsis

```
addColumn(col, mult=1.0)
```

##### Description

Add a new column to current column.

##### Arguments

`col`

Column to add.

`mult`

Magnification coefficient for added column. Optional, 1.0 by default.

##### Example

```
# Add column coly to column colx. The magnification coefficient for coly is 2.0
colx.addColumn(coly, 2.0)
```

#### 19.2.34.8 Column.clone()

##### Synopsis

```
clone()
```

##### Description

Create a deep copy of a column.

##### Example

```
# Create a deep copy of column col
colcopy = col.clone()
```

#### 19.2.34.9 Column.remove()

##### Synopsis

```
remove(item)
```

##### Description

Remove a term from a column.

If argument `item` is a constant, then remove the term by its index; otherwise argument `item` is a *Constraint Class* object.

##### Arguments

`item`

Constant index or the linear constraint for the term to be removed.

##### Example

```
# Remove the term whose index is 2 from column col
col.remove(2)
# Remove the term of the linear constraint conx from col
col.remove(conx)
```

#### 19.2.34.10 Column.clear()

##### Synopsis

```
clear()
```

##### Description

Remove all terms from a column.

##### Example

```
# Remove all terms from column col
col.clear()
```

### 19.2.35 ColumnArray Class

To facilitate users to operate on multiple *Column Class* objects, the Python interface of COPT provides *ColumnArray* object with the following methods:

#### 19.2.35.1 ColumnArray()

##### Synopsis

```
ColumnArray(columns=None)
```

##### Description

Create a *ColumnArray Class* object.

If argument `columns` is `None`, then create an empty *ColumnArray Class* object; otherwise use argument `columns` to initialize the newly created *ColumnArray Class* object.

### Arguments

columns

Columns to add. Optional, None by default. Can be *Column Class* object, *ColumnArray Class* object, list, dict, or *tupledict Class* object.

### Example

```
# Create an empty ColumnArray object
colarr = ColumnArray()
# Create a ColumnArray object and use columns colx and coly to initialize it
colarr = ColumnArray([colx, coly])
```

#### 19.2.35.2 ColumnArray.pushBack()

##### Synopsis

pushBack(column)

##### Description

Add single or multiple *Column Class* objects.

##### Arguments

column

Columns to add. Can be *Column Class* object, *ColumnArray Class* object, list, dict, or *tupledict Class* object.

### Example

```
# Add column colx to colarr
colarr.pushBack(colx)
# Add columns colx and coly to colarr
colarr.pushBack([colx, coly])
```

#### 19.2.35.3 ColumnArray.getColumn()

##### Synopsis

getColumn(idx)

##### Description

Retrieve the column according to its index in a *ColumnArray Class* object. Return a *Column Class* object.

##### Arguments

idx

Index of the column in the *ColumnArray Class* object, starting with 0.

### Example

```
# Retrieve the column whose index is 1 in colarr
col = colarr.getColumn(1)
```

#### 19.2.35.4 ColumnArray.getSize()

##### Synopsis

```
getSize()
```

##### Description

Retrieve the number of elements in a *ColumnArray Class* object.

##### Example

```
# Retrieve the number of element in colarr
colsize = colarr.getSize()
```

#### 19.2.35.5 ColumnArray.clear()

##### Synopsis

```
clear()
```

##### Description

Remove all terms from a *ColumnArray Class* object.

##### Example

```
# Remove all terms from colarr
colarr.clear()
```

### 19.2.36 ExprBuilder Class

ExprBuilder object contains operations related to building linear expressions, and provides the following methods:

#### 19.2.36.1 ExprBuilder()

##### Synopsis

```
ExprBuilder(arg1=0.0, arg2=None)
```

##### Description

Create a *ExprBuilder Class* object.

If argument **arg1** is constant, argument **arg2** is **None**, then create a *ExprBuilder Class* object and initialize it using argument **arg1**. If argument **arg1** is *Var Class* or *ExprBuilder Class* object, and argument **arg2** is constant or considered to be constant 1.0 when argument **arg2** is **None**, then initialize the newly created *ExprBuilder Class* object using arguments **arg1** and **arg2**. If argument **arg1** and **arg2** are list objects, then they are variables and coefficients used to initialize the newly created *ExprBuilder Class* object.

##### Arguments

**arg1**

Optional, 0.0 by default.

**arg2**

Optional, **None** by default.

##### Example

```
# Create a new ExprBuilder object and initialize it to 0.0
expr0 = ExprBuilder()
# Create a ExprBuilder object and initialize it to x + 2*y
expr2 = ExprBuilder([x, y], [1, 2])
```

#### 19.2.36.2 ExprBuilder.getSize()

##### Synopsis

```
getSize()
```

##### Description

Retrieve the number of terms in an expression builder.

##### Example

```
# Retrieve the number of terms in expression builder 'expr'
exprsize = expr.getSize()
```

#### 19.2.36.3 ExprBuilder.getCoeff()

##### Synopsis

```
getCoeff(idx)
```

##### Description

Retrieve the coefficient of a variable by its index from an expression builder.

##### Arguments

```
idx
```

Index of the variable in the expression builder, starting with 0.

##### Example

```
# Retrieve the coefficient for the term at index 1 from expression builder 'expr'
coeff = expr.getCoeff(1)
```

#### 19.2.36.4 ExprBuilder.getVar()

##### Synopsis

```
getVar(idx)
```

##### Description

Retrieve the variable by its index from an expression builder. Return a *Var Class* object.

##### Arguments

```
idx
```

Index of the variable in the expression builder, starting with 0.

##### Example

```
# Retrieve the variable for the term at index 1 from expression builder 'expr'
x = expr.getVar(1)
```

**19.2.36.5 ExprBuilder.getConstant()****Synopsis**

```
getConstant()
```

**Description**

Retrieve the constant term from an expression builder.

**Example**

```
# Retrieve the constant term from linear expression builder 'expr'
constant = expr.getConstant()
```

**19.2.36.6 ExprBuilder.addTerm()****Synopsis**

```
addTerm(var, coeff=1.0)
```

**Description**

Add a new term to current expression builder.

**Arguments**

**var**

Variable to add.

**coeff**

Magnification coefficient for added term. Optional, 1.0 by default.

**Example**

```
# Add term 2*x to linear expression builder 'expr'
expr.addTerm(x, 2.0)
```

**19.2.36.7 ExprBuilder.addExpr()****Synopsis**

```
addExpr(expr, coeff=1.0)
```

**Description**

Add new expression builder to the current one.

**Arguments**

**expr**

Expression builder to add.

**coeff**

Magnification coefficients for the added expression builder. Optional, 1.0 by default.

**Example**

```
# Add linear expression builder 2*x + 2*y to 'expr'
expr.addExpr(x + y, 2.0)
```

#### 19.2.36.8 ExprBuilder.clone()

##### Synopsis

clone()

##### Description

Create a deep copy of the expression builder.

##### Example

```
# Create a deep copy of expression builder 'expr'
exprcopy = expr.clone()
```

#### 19.2.36.9 ExprBuilder.getExpr()

##### Synopsis

getExpr()

##### Description

Create a linear expression related to the expression builder. Returns a *LinExpr Class* object.

##### Example

```
# Get the linear expression object related to expression builder 'exprbuilder'
expr = exprbuilder.getExpr()
```

### 19.2.37 LinExpr Class

LinExpr object contains operations related to variables for building linear constraints, and provides the following methods:

#### 19.2.37.1 LinExpr()

##### Synopsis

LinExpr(arg1=0.0, arg2=None)

##### Description

Create a *LinExpr Class* object.

If argument **arg1** is constant, argument **arg2** is **None**, then create a *LinExpr Class* object and initialize it using argument **arg1**. If argument **arg1** is *Var Class* or *LinExpr Class* object, and argument **arg2** is constant or considered to be constant 1.0 when argument **arg2** is **None**, then initialize the newly created *LinExpr Class* object using arguments **arg1** and **arg2**. If argument **arg1** is list object and argument **arg2** is **None**, then argument **arg1** contains a list of variable-coefficient pairs and initialize the newly created *LinExpr Class* object using arguments **arg1** and **arg2**. For other forms of arguments, call method **addTerms** to initialize the newly created *LinExpr Class* object.

##### Arguments

**arg1**

Optional, 0.0 by default.

**arg2**

Optional, None by default.

### Example

```
# Create a new LinExpr object and initialize it to 0.0
expr0 = LinExpr()
# Create a LinExpr object and initialize it to 2*x + 3*y
expr1 = LinExpr([(x, 2), (y, 3)])
# Create a LinExpr object and initialize it to x + 2*y
expr2 = LinExpr([x, y], [1, 2])
```

#### 19.2.37.2 LinExpr.setCoeff()

##### Synopsis

```
setCoeff(idx, newval)
```

##### Description

Set new coefficient value of a variable based on its index in an expression.

##### Arguments

`idx`

Index of the variable in the expression, starting with 0.

`newval`

New coefficient value of the variable.

### Example

```
# Set the coefficient for the term at index 0 in expression expr to 1.0
expr.setCoeff(0, 1.0)
```

#### 19.2.37.3 LinExpr.getCoeff()

##### Synopsis

```
getCoeff(idx)
```

##### Description

Retrieve the coefficient of a variable by its index from an expression.

##### Arguments

`idx`

Index of the variable in the expression, starting with 0.

### Example

```
# Retrieve the coefficient for the term at index 1 from expression expr
coeff = expr.getCoeff(1)
```



#### 19.2.37.4 LinExpr.getVar()

##### Synopsis

```
getVar(idx)
```

##### Description

Retrieve the variable by its index from an expression. Return a *Var Class* object.

##### Arguments

`idx`

Index of the variable in the expression, starting with 0.

##### Example

```
# Retrieve the variable for the term at index 1 from expression expr
x = expr.getVar(1)
```

#### 19.2.37.5 LinExpr.getConstant()

##### Synopsis

```
getConstant()
```

##### Description

Retrieve the constant term from an expression.

##### Example

```
# Retrieve the constant term from linear expression expr
constant = expr.getConstant()
```

#### 19.2.37.6 LinExpr.getValue()

##### Synopsis

```
getValue()
```

##### Description

Retrieve the value of an expression computed using the current solution.

##### Example

```
# Retrieve the value of expression expr for the current solution.
val = expr.getValue()
```

#### 19.2.37.7 LinExpr.getSize()

##### Synopsis

```
getSize()
```

##### Description

Retrieve the number of terms in an expression.

##### Example

```
# Retrieve the number of terms in expression expr
exprsize = expr.getSize()
```

**19.2.37.8 LinExpr.setConstant()****Synopsis**

```
setConstant(newval)
```

**Description**

Set the constant term of linear expression.

**Arguments**

`newval`

Constant term to be set.

**Example**

```
# Set constant term of linear expression 'expr' to 2.0
expr.setConstant(2.0)
```

**19.2.37.9 LinExpr.addConstant()****Synopsis**

```
addConstant(newval)
```

**Description**

Add a constant to an expression.

**Arguments**

`newval`

Constant to add.

**Example**

```
# Add constant 2.0 to linear expression 'expr'
expr.addConstant(2.0)
```

**19.2.37.10 LinExpr.addTerm()****Synopsis**

```
addTerm(var, coeff=1.0)
```

**Description**

Add a new term to current expression.

**Arguments**

`var`

Variable to add.

`coeff`

Magnification coefficient for added term. Optional, 1.0 by default.

**Example**

```
# Add term x to linear expression 'expr'
expr.addTerm(x)
```

#### 19.2.37.11 `LinExpr.addTerms()`

##### Synopsis

```
addTerms(vars, coeffs)
```

##### Description

Add a single term or multiple terms into an expression.

If argument `vars` is *Var Class* object, then argument `coeffs` is constant; If argument `vars` is *VarArray Class* object or list, then argument `coeffs` is constant or list; If argument `vars` is dictionary or *tupledict Class* object, then argument `coeffs` is constant, dict, or *tupledict Class* object.

##### Arguments

`vars`

Variables to add.

`coeffs`

Coefficients for variables.

##### Example

```
# Add term 2*x + 2*y to linear expression 'expr'
expr.addTerms([x, y], [2.0, 3.0])
```

#### 19.2.37.12 `LinExpr.addExpr()`

##### Synopsis

```
addExpr(expr, coeff=1.0)
```

##### Description

Add new expression to the current one.

##### Arguments

`expr`

Expression or expression builder to add.

`coeff`

Magnification coefficients for the added expression. Optional, 1.0 by default.

##### Example

```
# Add linear expression 2*x + 2*y to 'expr'
expr.addExpr(x + y, 2.0)
```

**19.2.37.13 LinExpr.clone()****Synopsis**

```
clone()
```

**Description**

Create a deep copy of the expression.

**Example**

```
# Create a deep copy of expression expr
exprcopy = expr.clone()
```

**19.2.37.14 LinExpr.reserve()****Synopsis**

```
reserve(n)
```

**Description**

Pre-allocate space for linear expression object.

**Arguments**

```
n
```

Number of terms to be allocated.

**Example**

```
# Allocate 100 terms for linear expression 'expr'
expr.reserve(100)
```

**19.2.37.15 LinExpr.remove()****Synopsis**

```
remove(item)
```

**Description**

Remove a term from a linear expression.

If argument `item` is constant, then remove the term stored at index `i` of the expression; otherwise argument `item` is *Var Class* object.

**Arguments**

```
item
```

Constant index or variable of the term to be removed.

**Example**

```
# Remove the term whose index is 2 from linear expression expr
expr.remove(2)
# Remove the term whose variable is x from linear expression expr
expr.remove(x)
```

### 19.2.38 QuadExpr Class

QuadExpr object contains operations related to variables for building linear constraints, and provides the following methods:

#### 19.2.38.1 QuadExpr()

##### Synopsis

```
QuadExpr(expr=0.0)
```

##### Description

Create a *QuadExpr Class* object.

Argument `expr` is constant, *Var Class*, *LinExpr Class* object or *QuadExpr Class* object.

##### Arguments

`expr`

Optional, 0.0 by default.

##### Example

```
# Create a new QuadExpr object and initialize it to 0.0
quadexpr0 = QuadExpr()
# Create a QuadExpr object and initialize it to 2*x + 3*y
quadexpr1 = QuadExpr([(x, 2), (y, 3)])
# Create a QuadExpr object and initialize it to x*x + 2*x*y
quadexpr2 = QuadExpr(x*x + 2*x*y)
```

#### 19.2.38.2 QuadExpr.setCoeff()

##### Synopsis

```
setCoeff(idx, newval)
```

##### Description

Set new coefficient value of a term based on its index in a quadratic expression.

##### Arguments

`idx`

Index of the term in the quadratic expression, starting with 0.

`newval`

New coefficient value of the term.

##### Example

```
# Set the coefficient for the term at index 0 in quadratic expression quadexpr to 1.0
quadexpr.setCoeff(0, 1.0)
```

### 19.2.38.3 QuadExpr.getCoeff()

#### Synopsis

```
getCoeff(idx)
```

#### Description

Retrieve the coefficient of a term by its index from a quadratic expression.

#### Arguments

`idx`

Index of the term in the quadratic expression, starting with 0.

#### Example

```
# Retrieve the coefficient for the term at index 1 from quadratic expression quadexpr
coeff = quadexpr.getCoeff(1)
```

### 19.2.38.4 QuadExpr.getVar1()

#### Synopsis

```
getVar1(idx)
```

#### Description

Retrieve the first variable of a quadratic term by its index from an expression.  
Return a *Var Class* object.

#### Arguments

`idx`

Index of the quadratic term in the expression, starting with 0.

#### Example

```
# Retrieve the first variable of a quadratic term at index 1 from quadratic expression quadexpr
x = quadexpr.getVar1(1)
```

### 19.2.38.5 QuadExpr.getVar2()

#### Synopsis

```
getVar2(idx)
```

#### Description

Retrieve the second variable of a quadratic term by its index from an expression.  
Return a *Var Class* object.

#### Arguments

`idx`

Index of the quadratic term in the expression, starting with 0.

#### Example

```
# Retrieve the first variable of a quadratic term at index 1 from quadratic expression quadexpr
y = quadexpr.getVar2(1)
```

#### 19.2.38.6 QuadExpr.getLinExpr()

##### Synopsis

```
getLinExpr()
```

##### Description

Retrieve the linear terms (if exist) from quadratic expression. Return a *LinExpr* *Class* object.

##### Example

```
# Retrieve the linear terms from a quadratic expression quadexpr
linexpr = quadexpr.getLinExpr()
```

#### 19.2.38.7 QuadExpr.getConstant()

##### Synopsis

```
getConstant()
```

##### Description

Retrieve the constant term from a quadratic expression.

##### Example

```
# Retrieve the constant term from quadratic expression quadexpr
constant = quadexpr.getConstant()
```

#### 19.2.38.8 QuadExpr.getValue()

##### Synopsis

```
getValue()
```

##### Description

Retrieve the value of a quadratic expression computed using the current solution.

##### Example

```
# Retrieve the value of quadratic expression quadexpr for the current solution.
val = quadexpr.getValue()
```

#### 19.2.38.9 QuadExpr.getSize()

##### Synopsis

```
getSize()
```

##### Description

Retrieve the number of terms in a quadratic expression.

##### Example

```
# Retrieve the number of terms in quadratic expression quadexpr
exprsize = quadexpr.getSize()
```

**19.2.38.10 QuadExpr.setConstant()****Synopsis**

```
setConstant(newval)
```

**Description**

Set the constant term of quadratic expression.

**Arguments**

`newval`

Constant to set.

**Example**

```
# Set constant term of quadratic expression 'quadexpr' to 2.0
quadexpr.setConstant(2.0)
```

**19.2.38.11 QuadExpr.addConstant()****Synopsis**

```
addConstant(newval)
```

**Description**

Add a constant to a quadratic expression.

**Arguments**

`newval`

Constant to add.

**Example**

```
# Add constant 2.0 to quadratic expression 'quadexpr'
quadexpr.addConstant(2.0)
```

**19.2.38.12 QuadExpr.addTerm()****Synopsis**

```
addTerm(coeff, var1, var2=None)
```

**Description**

Add a new term to current quadratic expression.

**Arguments**

`coeff`

Magnification coefficient for added term. Optional, 1.0 by default.

`var1`

The first variable for added term.

`var2`

The second variable for added term, defaults to `None`, i.e. add a linear term.

**Example**



```
# Add term x to quadratic expression 'quadexpr'
quadexpr.addTerm(1.0, x)
```

### 19.2.38.13 QuadExpr.addTerms()

#### Synopsis

```
addTerms(coeffs, vars1, vars2=None)
```

#### Description

Add a single term or multiple terms into a quadratic expression.

If argument `vars` is *Var Class* object, then argument `vars2` is *Var Class* object or `None`, argument `coeffs` is constant; If argument `vars` is *VarArray Class* object or list, then argument `vars2` is *VarArray Class* object, list or `None`, argument `coeffs` is constant or list; If argument `vars` is dictionary or *tupledict Class* object, then argument `vars2` is dictionary, *tupledict Class* object or `None`, argument `coeffs` is constant, dictionary, or *tupledict Class* object.

#### Arguments

`coeffs`

Coefficients for terms.

`vars1`

The first variable of each term.

`vars2`

The second variable of each term, defaults to `None`, i.e. add a linear term.

#### Example

```
# Add term 2*x + 3y + 2*x*x + 3*x*y to quadratic expression 'quadexpr'
# Note: Mixed format is supported by addTerms yet.
quadexpr.addTerms([2.0, 3.0], [x, y])
quadexpr.addTerms([2.0, 3.0], [x, x], [x, y])
```

### 19.2.38.14 QuadExpr.addLinExpr()

#### Synopsis

```
addLinExpr(expr, mult=1.0)
```

#### Description

Add new linear expression to the current quadratic expression.

#### Arguments

`expr`

Linear expression or linear expression builder to add.

`mult`

Magnification coefficient for the added expression. Optional, 1.0 by default.

#### Example

```
# Add linear expression 2*x + 2*y to 'quadexpr'
quadexpr.addLinExpr(x + y, 2.0)
```

**19.2.38.15 QuadExpr.addQuadExpr()****Synopsis**

```
addQuadExpr(expr, mult=1.0)
```

**Description**

Add new quadratic expression to the current one.

**Arguments**

`expr`

Expression or expression builder to add.

`mult`

Magnification coefficients for the added expression. Optional, 1.0 by default.

**Example**

```
# Add quadratic expression x*x + 2*y to 'quadexpr'
quadexpr.addQuadExpr(x*x + 2*y, 2.0)
```

**19.2.38.16 QuadExpr.clone()****Synopsis**

```
clone()
```

**Description**

Create a deep copy of the expression.

**Example**

```
# Create a deep copy of quadratic expression quadexpr
exprcopy = quadexpr.clone()
```

**19.2.38.17 QuadExpr.reserve()****Synopsis**

```
reserve(n)
```

**Description**

Pre-allocate space for quadratic expression object.

**Arguments**

`n`

Number of terms to be allocated.

**Example**

```
# Allocate 100 terms for quadratic expression 'expr'
expr.reserve(100)
```

### 19.2.38.18 QuadExpr.remove()

#### Synopsis

```
remove(item)
```

#### Description

Remove a term from a quadratic expression.

If argument `item` is constant, then remove the term stored at index `i` of the expression; otherwise argument `item` is *Var Class* object.

#### Arguments

`item`

Constant index or variable of the term to be removed.

#### Example

```
# Remove the term whose index is 2 from quadratic expression quadexpr
quadexpr.remove(2)
# Remove the terms one of which variable is x from quadratic expression quadexpr
quadexpr.remove(x)
```

## 19.2.39 PsdExpr Class

PsdExpr object contains operations related to variables for building positive semi-definite constraints, and provides the following methods:

### 19.2.39.1 PsdExpr()

#### Synopsis

```
PsdExpr(expr=0.0)
```

#### Description

Create a *PsdExpr Class* object.

#### Arguments

`expr`

Optional, 0.0 by default. Can be a constant, *Var Class*, *LinExpr Class* object or *PsdExpr Class* object.

#### Example

```
# Create a new PsdExpr object and initialize it to 0.0
expr0 = PsdExpr()
# Create a PsdExpr object and initialize it to 2*x + 3*y
expr1 = PsdExpr(2*x + 3*y)
```

### 19.2.39.2 PsdExpr.setCoeff()

#### Synopsis

```
setCoeff(idx, mat)
```

#### Description

Set new symmetric matrix coefficient for a positive semi-definite variable based on its index in the expression.

#### Arguments

`idx`

Index of the positive semi-definite variable in the expression, starting with 0.

`mat`

New symmetric matrix coefficient of the positive semi-definite variable.

#### Example

```
# Set symmetric matrix for the positive semi-definite variable at index 0 in expression "expr"
↳ to mat
expr.setCoeff(0, mat)
```

### 19.2.39.3 PsdExpr.getCoeff()

#### Synopsis

```
getCoeff(idx)
```

#### Description

Retrieve the symmetric matrix coefficient of a positive semi-definite variable by its index from the expression.

#### Arguments

`idx`

Index of the positive semi-definite variable in the expression, starting with 0.

#### Example

```
# Retrieve the symmetric matrix coefficient for the positive semi-definite variable at index 1
↳ from expression expr
mat = expr.getCoeff(1)
```

### 19.2.39.4 PsdExpr.getPsdVar()

#### Synopsis

```
getPsdVar(idx)
```

#### Description

Retrieve a positive semi-definite variable by its index from the expression. Return a *PsdVar Class* object.

#### Arguments

`idx`

Index of the positive semi-definite variable in the expression, starting with 0.

#### Example

```
# Retrieve the positive semi-definite variable at index 1 from expression expr
x = expr.getPsdVar(1)
```

#### 19.2.39.5 PsdExpr.getLinExpr()

##### Synopsis

```
getLinExpr()
```

##### Description

Retrieve the linear terms (if exist) from positive semi-definite expression. Return a *LinExpr Class* object.

#### Example

```
# Retrieve the linear terms from a positive semi-definite expression expr
linexpr = expr.getLinExpr()
```

#### 19.2.39.6 PsdExpr.getConstant()

##### Synopsis

```
getConstant()
```

##### Description

Retrieve the constant term from a positive semi-definite expression.

#### Example

```
# Retrieve the constant term from expression expr
constant = expr.getConstant()
```

#### 19.2.39.7 PsdExpr.getValue()

##### Synopsis

```
getValue()
```

##### Description

Retrieve the value of a positive semi-definite expression computed using the current solution.

#### Example

```
# Retrieve the value of positive semi-definite expression expr for the current solution.
val = expr.getValue()
```

#### 19.2.39.8 PsdExpr.getSize()

##### Synopsis

```
getSize()
```

##### Description

Retrieve the number of terms in a positive semi-definite expression.

##### Example

```
# Retrieve the number of terms in expression expr
exprsize = expr.getSize()
```

#### 19.2.39.9 PsdExpr.setConstant()

##### Synopsis

```
setConstant(newval)
```

##### Description

Set the constant term of positive semi-definite expression.

##### Arguments

`newval`

Constant to set.

##### Example

```
# Set constant term of expression 'expr' to 2.0
expr.setConstant(2.0)
```

#### 19.2.39.10 PsdExpr.addConstant()

##### Synopsis

```
addConstant(newval)
```

##### Description

Add a constant to a positive semi-definite expression.

##### Arguments

`newval`

Constant to add.

##### Example

```
# Add constant 2.0 to expression 'expr'
expr.addConstant(2.0)
```

#### 19.2.39.11 PsdExpr.addTerm()

##### Synopsis

```
addTerm(var, mat)
```

##### Description

Add a new term to current positive semi-definite expression.

##### Arguments

**var**

The positive semi-definite variable to add.

**mat**

The symmetric matrix coefficient for the positive semi-definite variable.

##### Example

```
# Add positive semi-definite term C1 * X to expression 'expr'
expr.addTerm(X, C1)
```

#### 19.2.39.12 PsdExpr.addTerms()

##### Synopsis

```
addTerms(vars, mats)
```

##### Description

Add a single term or multiple positive semi-definite terms into a positive semi-definite expression.

If argument **vars** is *PsdVar Class* object, then argument **mats** is *SymMatrix Class* object; If argument **vars** is *PsdVarArray Class* object or list, then argument **mats** is *SymMatrixArray Class* or list;

##### Arguments

**vars**

The positive semi-definite variables to add.

**mats**

The symmetric matrices of the positive semi-definite terms.

##### Example

```
# Add terms C1 * X1 + C2 * X2 to expression 'expr'
expr.addTerms([X1, X2], [C1, C2])
```

#### 19.2.39.13 PsdExpr.addLinExpr()

##### Synopsis

```
addLinExpr(expr, mult=1.0)
```

##### Description

Add new linear expression to the current positive semi-definite expression.

##### Arguments

**expr**

Linear expression or linear expression builder to add.

`mult`

Magnification coefficient for the added expression. Optional, 1.0 by default.

#### Example

```
# Add linear expression 2*x + 2*y to 'expr'
expr.addLinExpr(x + y, 2.0)
```

#### 19.2.39.14 `PsdExpr.addPsdExpr()`

##### Synopsis

```
addPsdExpr(expr, mult=1.0)
```

##### Description

Add new positive semi-definite expression to the current one.

##### Arguments

`expr`

Positive semi-definite expression or positive semi-definite expression builder to add.

`mult`

Magnification coefficient for the added positive semi-definite expression. Optional, 1.0 by default.

#### Example

```
# Add positive semi-definite expression C * X to 'expr'
expr.addPsdExpr(C*X)
```

#### 19.2.39.15 `PsdExpr.clone()`

##### Synopsis

```
clone()
```

##### Description

Create a deep copy of the expression.

#### Example

```
# Create a deep copy of expression expr
exprcopy = expr.clone()
```



#### 19.2.39.16 PsdExpr.reserve()

##### Synopsis

`reserve(n)`

##### Description

Pre-allocate space for positive semi-definite expression object.

##### Arguments

`n`

Number of terms to be allocated.

##### Example

```
# Allocate 100 terms for positive semi-definite expression 'expr'
expr.reserve(100)
```

#### 19.2.39.17 PsdExpr.remove()

##### Synopsis

`remove(item)`

##### Description

Remove a term from a positive semi-definite expression.

If argument `item` is constant, then remove the term stored at index `i` of the expression; otherwise argument `item` is *PsdVar Class* object.

##### Arguments

`item`

Constant index or *PsdVar Class* variable of the term to be removed.

##### Example

```
# Remove the term whose index is 2 from positive semi-definite expression expr
expr.remove(2)
# Remove the terms one of which variable is x from positive semi-definite expression expr
expr.remove(x)
```

#### 19.2.40 CoptError Class

CoptError Class provides operations on error. An exception of the CoptError is thrown when error occurs in a method call corresponding to the underlying interface of solver. The following attributes are provided to retrieve error information:

- CoptError.retcode  
Error code.
- CoptError.message  
Error message.

## 19.3 Helper Functions and Utilities

Helper functions and utilities are encapsulated based on Python's basic data types, providing easy-to-use data types to facilitate the rapid construction of complex optimization models. This section will explain its functions and usages.

### 19.3.1 Helper Functions

#### 19.3.1.1 multidict()

##### Synopsis

```
multidict(data)
```

##### Description

Split a single dictionary into keys and multiple dictionaries. Return keys and dictionaries.

##### Arguments

`data`

A Python dictionary to be applied. Each key should map to a list of  $n$  values.

##### Example

```
keys, dict1, dict2 = multidict({
    "hello": [0, 1],
    "world": [2, 3]})
```

#### 19.3.1.2 quicksum()

##### Synopsis

```
quicksum(data)
```

##### Description

Build expressions efficiently. Return a *LinExpr Class* object.

##### Arguments

`data`

Terms to add.

##### Example

```
expr = quicksum(m.getVars())
```

### 19.3.2 tuplelist Class

The tuplelist object is an encapsulation based on Python lists, and provides the following methods:

#### 19.3.2.1 tuplelist()

##### Synopsis

```
tuplelist(list)
```

##### Description

Create and return a *tuplelist Class* object.

##### Arguments

list

A Python list.

##### Example

```
t1 = tuplelist([(0, 1), (1, 2)])
t1 = tuplelist([('a', 'b'), ('b', 'c')])
```

#### 19.3.2.2 tuplelist.add()

##### Synopsis

```
add(item)
```

##### Description

Add an item to a *tuplelist Class* object

##### Arguments

item

Item to add. Can be a Python tuple.

##### Example

```
t1 = tuplelist([(0, 1), (1, 2)])
t1.add((2, 3))
```

#### 19.3.2.3 tuplelist.select()

##### Synopsis

```
select(pattern)
```

##### Description

Get all terms that match the specified pattern. Return a *tuplelist Class* object.

##### Arguments

pattern

Specified pattern.

##### Example

```
t1 = tuplelist([(0, 1), (0, 2), (1, 2)])
t1.select(0, '*')
```

### 19.3.3 tupledict Class

The tupledict class is an encapsulation based on Python dictionaries, and provides the following methods:

#### 19.3.3.1 tupledict()

##### Synopsis

```
tupledict(args, kwargs)
```

##### Description

Create and return a *tupledict Class* object.

##### Arguments

`args`

Positional arguments.

`kwargs`

Named arguments.

##### Example

```
d = tupledict([(0, "hello"), (1, "world")])
```

#### 19.3.3.2 tupledict.select()

##### Synopsis

```
select(pattern)
```

##### Description

Get all terms that match the specified pattern. Return a *tupledict Class* object.

##### Arguments

`pattern`

Specified pattern.

##### Example

```
d = tupledict([(0, "hello"), (1, "world")])
d.select()
```

#### 19.3.3.3 tupledict.sum()

##### Synopsis

```
sum(pattern)
```

##### Description

Sum all terms that match the specified pattern. Return a *LinExpr Class* object.

##### Arguments

`pattern`

Specified pattern.

##### Example

```
expr = x.sum()
```

#### 19.3.3.4 tupledict.prod()

##### Synopsis

```
prod(coeff, pattern)
```

##### Description

Filter terms that match the specified pattern and multiply by coefficients. Return a *LinExpr Class* object.

##### Arguments

**coeff**

Coefficients. Can be a dict or a *tupledict Class* object.

**pattern**

Specified pattern.

##### Example

```
coeff = dict([(1, 0.1), (2, 0.2)])  
expr = x.prod(coeff)
```

#### 19.3.4 ProbBuffer Class

The ProbBuffer is an encapsulation of buffer of string stream, and provides the following methods:

##### 19.3.4.1 ProbBuffer()

##### Synopsis

```
ProbBuffer(buff)
```

##### Description

Create and return a *ProbBuffer Class* object.

##### Arguments

**buff**

Size of buffer, defaults to `None`, i.e. the buffer size is 0.

##### Example

```
# Create a buffer of size 100  
buff = ProbBuffer(100)
```

#### 19.3.4.2 ProbBuffer.getData()

##### Synopsis

getData()

##### Description

Get the contents of buffer.

##### Example

```
# Print the contents in buffer
print(buff.getData())
```

#### 19.3.4.3 ProbBuffer.getSize()

##### Synopsis

getSize()

##### Description

Get the size of the buffer.

##### Example

```
# Get the size of the buffer
print(buff.getSize())
```

#### 19.3.4.4 ProbBuffer.resize()

##### Synopsis

resize(sz)

##### Description

Resize the size of the buffer.

##### Arguments

sz

New size of buffer.

##### Example

```
# Resize the size of buffer to 100
buff.resize(100)
```